

The Vera C. Rubin Observatory Data Preview 1

VERA C. RUBIN OBSERVATORY TEAM,¹ TATIANA ACERO-CUELLAR ² CHRISTINA L. ADAIR ³
JENNIFER K. ADELMAN-MCCARTHY ⁴ ANASTASIA ALEXOV,¹ RUSS ALLBERY ¹ YUSRA ALSAYYAD ⁵
JHONATAN AMADO ⁴ NATHAN AMOUROUX ⁶ PIERRE ANTILOGUS,⁷ ALEXIS ARACENA ALCAYAGA,⁸
GONZALO ARAVENA-ROJAS ⁸ CLAUDIO H. ARAYA CORTES,⁸ ÉRIC AUBOURG,⁹ JOHN BANOVETZ ¹⁰ CARLOS BARRÍA,⁸
BRIAN J. BAUMAN,¹¹ KEITH BECHTOL ^{1,12} ANDREW C. BECKER ¹³ VALERIE R. BECKER ¹⁴ ERIC C. BELLM ¹⁵
PEDRO H. BERNARDINELLI ¹⁶ ROBERT D. BLUM ¹⁴ ADAM BOLTON,³ MICHAEL T. BOOTH,¹ JAMES F. BOSCH ⁵
ALEXANDRE BOUCAUD ¹⁷ DOMINIQUE BOUTIGNY ⁶ ROBERT A. BOVILL,¹ ANDREW BRADSHAW,^{3,18}
BRIAN J. BRONDEL ¹⁹ ALEX BROUGHTON ¹⁸ AUDREY BUDLONG,¹⁵ RODOLFO CANESTRARI ²⁰ NEVEN CAPLAR ¹⁵
JEFFREY L. CARLIN ¹ COLIN ORION CHANDLER ^{21,15,22} CHIHWAY CHANG ²³ HSIN-FANG CHIANG ³
JAMES CHIANG ¹⁸ YUMI CHOI ²⁴ ERIC J. CHRISTENSEN,⁸ CHARLES F. CLAVER,¹ ANDY W. CLEMENTS,¹
JOSEPH J. COCKRUM,¹ FRANCO COLLEONI,⁸ CÉLINE COMBET ²⁵ ANDREW J. CONNOLLY ¹⁶
JULIO EDUARDO CONSTANZO CORDOVA ⁸ HANS E. CONTRERAS,⁸ JOHN FRANKLIN CRENSHAW ¹⁶
SYLVIE DAGORET-CAMPAGNE ²⁶ FELIPE DARUICH,⁸ GUILLAUME DAUBARD,⁷ GREG DAUES,²⁷ ERIK DENNIHY,¹
PETER E. DOHERTY,²⁸ ALEX DRLICA-WAGNER ⁴ GREGORY P. DUBOIS-FELSMANN ²⁹ FROSSIE ECONOMOU ¹
ORION EIGER ^{3,18} LUKAS EISERT ³ ALAN M. EISNER ³⁰ ANTHONY ENGLERT ³¹ BADEN ERB,⁸ JUAN A. FABREGA,⁸
PARKER FAGRELIUS,¹ KEVIN FANNING ³ ANGELO FAUSTI NETO ¹ PETER S. FERGUSON ^{16,12} AGNÈS F. FERTÉ ³
MERLIN FISHER-LEVINE ³² MICHAEL D. FOSS,³ DAN S. FUCHS ³ EMMANUEL GANGLER ³³ IGOR GAPONENKO,³
JULEN GARCIA ³⁴ JOHN H. GATES,³ RANPAL K. GILL,¹⁹ ENRICO GIRO ³⁵ THOMAS GLANZMAN ³ ROBINSON GODOY,⁸
IAIN GOODENOW,¹ MIRANDA R. GORSUCH ¹² MICHELLE GOWER ²⁷ MIKAEL GRANVIK ^{36,37}
SARAH GREENSTREET ²⁴ WEN GUAN ¹⁰ THIBAUT GUILLEMIN ⁶ LEANNE P. GUY ⁸ DIANE HASCALL,³
AREN NATHANIEL HEINZE ¹⁶ FABIO HERNANDEZ ³⁸ KENNETH HERNER ⁴ ARDIS HERROLD,¹
ERIN LEIGH HOWARD ¹⁵ PATRICK INGRAHAM ³⁹ DAVID H. IRVING ¹⁴ ŽELJKO IVEZIC ^{1,15} M. JAMES JEE ^{40,41}
TIM JENNESS ¹ TOBY C. JENNINGS ³ ANDREA JEREMIE ⁶ GARRETT JERNIGAN,^{42,*} ANTHONY S. JOHNSON ³
R. LYNNE JONES ¹⁵ ROGER WILLIAM LEWIS JONES ⁴³ CLAIRE JURAMY-GILLES,⁷ MARIO JURIĆ ¹⁶
STEVEN M. KAHN ⁴⁴ J. BRYCE KALMBACH ³ YIJUNG KANG ^{18,8} ARUN KANNAWADI ^{45,5} EDWARD KARAVAKIS ¹⁰
KSHITIJ KELKAR ⁸ LEE S. KELVIN ⁵ IVAN V. KOTOV,¹⁰ MIKOLAJ KOWALIK ²⁷ VICTOR L. KRABBENDAM,¹
K. SIMON KRUGHOF ^{1,*} PETR KUBÁNEK ⁸ JACOB A. KURLANDER ¹⁶ MILE KUSULJA,²⁵ CRAIG S. LAGE,⁴¹
P. J. A. LAGO ¹⁹ KATHERINE LALOTIS ⁴⁶ TRAVIS LANGE,³ DIDIER LAPORTE,⁷ RYAN M. LAU ²⁴
JUAN CARLOS LAZARTE,³ QUENTIN LE BOULC'H,³⁸ PIERRE-FRANÇOIS LÉGET ⁵ LAURENT LE GUILLOU ⁷ MING LIANG,¹
SHUANG LIANG,³ KIAN-TAT LIM ³ HUAN LIN ⁴ MARGAUX LOPEZ,³ JUAN J. LOPEZ TORO,⁸ PETER LOVE,⁴³
ROBERT H. LUPTON ⁵ NATE B. LUST ⁵ LAUREN A. MACARTHUR ⁵ SEAN PATRICK MACBRIDE ⁴⁷
GREG M. MADEJSKI,¹⁸ GABRIELE MAINETTI ³⁸ THOMAS W. MARKIEWICZ ³ STUART MARSHALL,¹⁸ GUIDO MAULEN,⁸
JEREMY MCCORMICK ³ DAVID MCKAY ⁴⁸ ROBERT MCKERCHER,¹ GUILLEM MEGIAS HOMAR ^{49,18}
AARON M. MEISNER ²⁴ FELIPE MENANTEAU,²⁷ HEATHER R. MENTZER ³⁰ JOSHUA E. MEYERS ³ DAVID J. MILLS,¹
JOACHIM MOEYENS ¹⁶ MARC MONIEZ,²⁶ FRED E. MOOLEKAMP ⁵⁰ FRITZ MUELLER ³ JAMES R. MULLANEY ⁵¹
ERIC H. NEILSEN, JR. ⁴ JEREMY NEVEU,²⁶ NIMA SEDAGHAT ¹⁵ TIMOTHY NOBLE,⁵² ERFAN NOURBAKHSH ⁵
WILLIAM O'MULLANE ⁸ DMITRY ONOPRIENKO,³ MARCO ORIUNNO ³ SHAWN OSIER,³ RUSSELL E. OWEN,¹⁵
AASHAY PAI ²³ JOHN K. PAREJKO ¹⁵ HYE YUN PARK ⁴⁵ MARIA T. PATTERSON ¹⁵ MARINA S. PAVLOVIC ⁸
KARLA PEÑA RAMÍREZ ⁸ JOHN R. PETERSON ⁵³ STEPHEN R. PIETROWICZ ²⁷ ANDRÉS A. PLAZAS MALAGÓN ^{3,18}
REBEKAH POLEN,⁴⁵ HANNAH MARY MARGARET POLLEK,³ PAUL A. PRICE ⁵ BRUNO C. QUINT ¹
JOSÉ MIGUEL QUINTERO MARIN,⁸ MARKUS RABUS ⁵⁴ VELJKO RADEKA,¹⁰ ANDREW P. RASMUSSEN ¹⁸
DAVID A. RATHFELDER RATHFELDER,⁵⁵ MEREDITH L. RAWLS ^{15,16} SOPHIE L. REED ⁵ KEVIN A. REIL,³
MICHAEL A. REUTER ¹ TIAGO RIBEIRO,¹ MICKAEL RIGALT ⁵⁶ VINCENT J. RIOT,¹¹ STEVEN M. RITZ ³⁰
MARIO F. RIVERA RIVERA,⁸ WILLIAM ROBY,²⁹ GABRIELE RODEGHIERO ⁵⁷ AARON ROODMAN ¹⁸ LUCA ROSIGNOLI ⁵⁸
CÉCILE ROUCELLE ¹⁷ STEFANO RUSSO,⁷ ELI S. RYKOFF ¹⁸ ANDREI SALNIKOV ³ BRUNO O. SÁNCHEZ ⁵⁹
DAVID SANMARTIM ⁸ CLARE SAUNDERS ⁵ RAFE H. SCHINDLER,¹⁸ SAMUEL J. SCHMIDT ⁴¹ BRIAN SELVY,¹
EDGARD ESTEBAN SEPULVEDA VALENZUELA,⁸ GONZALO SERICHE,⁸ ALYSHA SHUGART ⁸ JONATHAN SICK ^{60,1}
CRISTIÁN SILVA,⁸ MATHEW C SIMS ⁶¹ JALADH SINGHAL ²⁹ COLIN T. SLATER ¹⁵ BRIANNA M. SMART ¹⁵

CHRISTINE SOLDAHL,³ IOANA SOTUELA ELORRIAGA,⁸ BRIAN STALDER,¹ HERNAN STOCKEBRAND,⁸ ALAN L. STRAUSS^{ID},¹⁴
 MICHAEL A. STRAUSS^{ID},⁵ CHRIS SUBERLAK,¹⁵ IAN S. SULLIVAN^{ID},¹⁵ JOHN D. SWINBANK^{ID},^{62,5} DIEGO TAPIA,⁸
 ALESSIO TARANTO^{ID},⁵⁸ DAN S. TARANU^{ID},⁵ JOHN GREGG THAYER,³ SANDRINE THOMAS^{ID},¹ ADAM J. THORNTON^{ID},¹
 ROBERTO TIGHE,⁸ TE-WEI TSAI,¹ DOUGLAS L. TUCKER^{ID},⁴ MAX TURRI,³ J. ANTHONY TYSON^{ID},⁴¹
 ELANA K. URBACH^{ID},⁶³ YOUSUKE UTSUMI^{ID},⁶⁴ WOUTER VAN REEVEN,⁸ PETER ANTHONY VAUCHER,³ PAULINA VENEGAS,⁸
 ANTONIA SIERRA VILLARREAL^{ID},³ STELIOS VOUTSINAS^{ID},¹ CHRISTOPHER W. WALTER^{ID},⁴⁵ YUANKUN (DAVID) WANG^{ID},¹⁶
 CHRISTOPHER Z. WATERS^{ID},⁵ CHRISTINA C. WILLIAMS^{ID},²⁴ BETH WILLMAN^{ID},⁶⁵ MATTHIAS WITTGEN^{ID},³
 W. M. WOOD-VASEY^{ID},⁶⁶ WEI YANG,³ ZHAOYU YANG,¹⁰ BRIAN P. YANNY^{ID},⁴ PETER YOACHIM^{ID},¹⁵
 TIANQING ZHANG^{ID},⁶⁶ AND CONGHAO ZHOU^{ID}³⁰

¹Vera C. Rubin Observatory Project Office, 950 N. Cherry Ave., Tucson, AZ 85719, USA

²Department of Physics and Astronomy, University of Delaware, Newark, DE 19716-2570, USA

³SLAC National Accelerator Laboratory, 2575 Sand Hill Rd., Menlo Park, CA 94025, USA

⁴Fermi National Accelerator Laboratory, P. O. Box 500, Batavia, IL 60510, USA

⁵Department of Astrophysical Sciences, Princeton University, Princeton, NJ 08544, USA

⁶Universite Grenoble-Alpes, Universite Savoie Mont Blanc, CNRS/IN2P3 Laboratoire d'Annecy-le-Vieux de Physique des Particules, 9
 Chemin de Bellevue – BP 110, F-74940 Annecy-le-Vieux Cedex, France

⁷Laboratoire de Physique Nucleaire et des Hautes Energies, Universite Pierre et Marie Curie, Universite Paris Cite, CNRS/IN2P3, 4
 place Jussieu, 75005 Paris, France

⁸Vera C. Rubin Observatory, Avenida Juan Cisternas #1500, La Serena, Chile

⁹Universite Paris Cité, CNRS, CEA, Astroparticule et Cosmologie, F-75013 Paris, France

¹⁰Brookhaven National Laboratory, Upton, NY 11973, USA

¹¹Lawrence Livermore National Laboratory, 7000 East Avenue, Livermore, CA 94550, USA

¹²Department of Physics, University of Wisconsin-Madison, Madison, WI 53706, USA

¹³Amazon Web Services, Seattle, WA 98121, USA

¹⁴Vera C. Rubin Observatory/NSF NOIRLab, 950 N. Cherry Ave., Tucson, AZ 85719, USA

¹⁵University of Washington, Dept. of Astronomy, Box 351580, Seattle, WA 98195, USA

¹⁶Institute for Data-intensive Research in Astrophysics and Cosmology, University of Washington, 3910 15th Avenue NE, Seattle, WA
 98195, USA

¹⁷Universite Paris Cité, CNRS, Astroparticule et Cosmologie, F-75013 Paris, France

¹⁸Kavli Institute for Particle Astrophysics and Cosmology, SLAC National Accelerator Laboratory, 2575 Sand Hill Rd., Menlo Park, CA
 94025, USA

¹⁹Vera C. Rubin Observatory/NSF NOIRLab, Casilla 603, La Serena, Chile

²⁰INAF Istituto di Astrofisica Spaziale e Fisica Cosmica di Palermo, Via Ugo la Malfa 153, 90146, Palermo, Italy

²¹LSST Interdisciplinary Network for Collaboration and Computing, Tucson, USA

²²Department of Astronomy and Planetary Science, Northern Arizona University, P.O. Box 6010, Flagstaff, AZ 86011, USA

²³Department of Astronomy and Astrophysics, University of Chicago, 5640 South Ellis Avenue, Chicago, IL 60637, USA

²⁴NSF NOIRLab, 950 N. Cherry Ave., Tucson, AZ 85719, USA

²⁵Laboratoire de Physique Subatomique et de Cosmologie, Universite Grenoble-Alpes, CNRS/IN2P3, 53 av. des Martyrs, 38026 Grenoble
 cedex, France

²⁶Universite Paris-Saclay, CNRS/IN2P3, IJCLab, Orsay, France

²⁷NCSA, University of Illinois at Urbana-Champaign, 1205 W. Clark St., Urbana, IL 61801, USA

²⁸Smithsonian Astrophysical Observatory, 60 Garden St., Cambridge MA 02138, USA

²⁹Caltech/IPAC, California Institute of Technology, MS 100-22, Pasadena, CA 91125-2200, USA

³⁰Santa Cruz Institute for Particle Physics and Physics Department, University of California–Santa Cruz, 1156 High St., Santa Cruz,
 CA 95064, USA

³¹Department of Physics, Brown University, 182 Hope Street, Providence, RI 02912, USA

³²D4D CONSULTING LTD., Suite 1 Second Floor, Everdene House, Deansleigh Road, Bournemouth, UK BH7 7DU

³³Universite Clermont Auvergne, CNRS/IN2P3, Laboratoire de Physique de Clermont Auvergne, F-63000 Clermont-Ferrand, France

³⁴C. Iñaki Goenaga, 5, 20600, Guipúzcoa, Spain

³⁵INAF Osservatorio Astronomico di Trieste, Via Giovan Battista Tiepolo 11, 34143, Trieste, Italy

³⁶Department of Physics, P.O. Box 64, 00014 University of Helsinki, Finland

³⁷Asteroid Engineering Laboratory, Luleå University of Technology, Box 848, SE-981 28 Kiruna, Sweden

³⁸CNRS, CC-IN2P3, 21 avenue Pierre de Coubertin, CS70202, F-69627 Villeurbanne cedex, France

³⁹Steward Observatory, The University of Arizona, 933 N. Cherry Ave., Tucson, AZ 85721, USA

⁴⁰Department of Astronomy, Yonsei University, 50 Yonsei-ro, Seoul 03722, Republic of Korea

⁴¹Physics Department, University of California, One Shields Avenue, Davis, CA 95616, USA

⁴²Space Sciences Lab, University of California, 7 Gauss Way, Berkeley, CA 94720-7450, USA

⁴³Lancaster University, Lancaster, UK

⁴⁴Physics Department, University of California, 366 Physics North, MC 7300 Berkeley, CA 94720, USA

⁴⁵Department of Physics, Duke University, Durham, NC 27708, USA

⁴⁶Center for Cosmology and Astro-Particle Physics, The Ohio State University, Columbus, OH 43210, USA

⁴⁷Physik-Institut, University of Zurich, Winterthurerstrasse 190, 8057 Zurich, Switzerland

⁴⁸EPCC, University of Edinburgh, 47 Potterrow, Edinburgh, EH8 9BT, UK

⁴⁹Department of Aeronautics and Astronautics, Stanford University, Stanford, CA 94305, USA

⁵⁰soZen Inc., 105 Clearview Dr, Penfield, NY 14526

⁵¹Astrophysics Research Cluster, School of Mathematical and Physical Sciences, University of Sheffield, Sheffield, S3 7RH, United Kingdom

⁵²Science and Technology Facilities Council, Rutherford Appleton Laboratory, Harwell, UK

⁵³Department of Physics and Astronomy, Purdue University, 525 Northwestern Ave., West Lafayette, IN 47907, USA

⁵⁴Departamento de Matemática y Física Aplicadas, Facultad de Ingeniería, Universidad Católica de la Santísima Concepción, Alonso de Rivera 2850, Concepción, Chile

⁵⁵AURA, 950 N. Cherry Ave., Tucson, AZ 85719, USA

⁵⁶Université de Lyon, Université Claude Bernard Lyon 1, CNRS, IP2I Lyon/IN2P3, F-69622 Villeurbanne, France

⁵⁷INAF Osservatorio di Astrofisica e Scienza dello Spazio Bologna, Via P. Gobetti 93/3, 40129, Bologna, Italy

⁵⁸Department of Physics and Astronomy (DIFA), University of Bologna, Via P. Gobetti 93/2, 40129, Bologna, Italy

⁵⁹Aix Marseille Univ, CNRS/IN2P3, CPPM, Marseille, France

⁶⁰J.Sick Codes Inc., Penetanguishene, Ontario, Canada

⁶¹Science and Technology Facilities Council, UK Research and Innovation, Polaris House, North Star Avenue, Swindon, SN2 1SZ, UK

⁶²ASTRON, Oude Hoogeveensedijk 4, 7991 PD, Dwingeloo, The Netherlands

⁶³Department of Physics, Harvard University, 17 Oxford St., Cambridge MA 02138, USA

⁶⁴National Astronomical Observatory of Japan, Chile Observatory, Los Abedules 3085, Vitacura, Santiago, Chile

⁶⁵LSST Discovery Alliance, 933 N. Cherry Ave., Tucson, AZ 85719, USA

⁶⁶Department of Physics and Astronomy, University of Pittsburgh, 3941 O'Hara Street, Pittsburgh, PA 15260, USA

(Dated: July 17, 2025)

ABSTRACT

We present Rubin Data Preview 1 (DP1), the first data from the NSF-DOE Vera C. Rubin Observatory, comprising raw and calibrated single-epoch images, coadds, difference images, detection catalogs, and ancillary data products. DP1 is based on 1792 optical/near-infrared exposures acquired over 48 distinct nights by the Rubin Commissioning Camera, LSSTComCam, on the Simonyi Survey Telescope at the Summit Facility on Cerro Pachón, Chile in late 2024. DP1 covers ~ 15 deg². distributed across seven roughly equal-sized non-contiguous fields, each independently observed in six broad photometric bands, *ugrizy*. The median FWHM of the point-spread function across all bands is approximately 1.13", with the sharpest images reaching about 0.65". The 5σ point source depths for coadded images in the deepest field, Extended Chandra Deep Field South, are: $u = 24.55$, $g = 26.18$, $r = 25.96$, $i = 25.71$, $z = 25.07$, $y = 23.10$. Other fields are no more than 2.2 magnitudes shallower in any band, where they have nonzero coverage. DP1 contains approximately 2.3 million distinct astrophysical objects, of which 1.6 million are extended in at least one band, and 431 solar system objects, of which 93 are new discoveries. DP1 is approximately 3.5 TB in size and available to Rubin data rights holders via the Rubin Science Platform, a cloud-based environment for the analysis of petascale astronomical data. While small compared to future LSST releases, its high quality and diversity of data support a broad range of early science investigations ahead of full operations in late 2025.

Keywords: Rubin Observatory – LSST

* Author is deceased

1. INTRODUCTION

The National Science Foundation (NSF)–Department of Energy (DOE) Vera C. Rubin Observatory is a ground-based, wide-field optical/near-infrared facility located on Cerro

Pachón in northern Chile. Named in honor of Vera C. Rubin, a pioneering astronomer whose groundbreaking work in the 20th century provided the first convincing evidence for the existence of dark matter (V. C. Rubin & W. K. Ford 1970; V. C. Rubin et al. 1980), the observatory’s prime mission is to carry out the Legacy Survey of Space and Time (Legacy Survey of Space and Time (formerly Large Synoptic Survey Telescope) (LSST); Ž. Ivezić et al. 2019a). This 10-year survey is designed to obtain rapid-cadence, multi-band imaging of the entire visible southern sky approximately every 3–4 nights, mapping it to a depth of ~ 27.5 magnitude in the r-band with ~ 0.7 arcsecond seeing, with a total of ~ 800 visits per pointing.

The Rubin Observatory system consists of four main components: the Simonyi Survey Telescope, featuring an 8.4 m diameter (6.5 m effective aperture) primary mirror that delivers a wide field of view; a 3.2-gigapixel Camera, capable of imaging 9.6 square degrees per exposure with seeing-limited quality in six broadband filters, *ugrizy* (320–1050 nm); an automated Data Management System that processes and archives tens of terabytes of data per night, generating science-ready data products within minutes for a global community of scientists; and an Education and Public Outreach () program that provides real-time data access, interactive tools, and educational content to engage the public. The integrated system’s étendue⁶⁷ of $319 \text{ m}^2 \text{ deg}^2$, is over an order of magnitude larger than that of any previous optical observatory, enabling a fast, large-scale survey with exceptional depth in a fraction of the time compared to other observatories.

The observatory’s design is driven by four key science themes: probing dark energy and dark matter; taking an inventory of the solar system; exploring the transient and variable optical sky; and mapping the Milky Way (Ž. Ivezić et al. 2019a). These themes inform the optimization of a range of system parameters, including image quality, photometric and astrometric accuracy, the depth of a single visit and the co-added survey depth, the filter complement, the total number of visits per pointing as well as the distribution of visits on the sky, and total sky coverage. Additionally, they inform the design of the data processing and access systems. By optimizing the system parameters to support a wide range of scientific goals, we maximize the observatory’s scientific output across all areas, making Rubin a powerful discovery machine capable of addressing a broad range of astrophysical questions.

⁶⁷ The product of the primary mirror area and the angular area of its field of view for a given set of observing conditions.

Throughout the duration of the LSST, Rubin Observatory will issue a series of Data Releases, each representing a complete reprocessing of all LSST data collected up to that point. Prior to the start of the LSST survey, commissioning activities will generate a significant volume of science-grade data. To make this early data available to the community, the Rubin Early Science Program (L. P. Guy et al. 2025) was established. One key component of this program is a series of Data Previews; early versions of the LSST Data Releases. These previews include preliminary data products derived from both simulated and commissioning data, which, together with early versions of the data access services, are intended to support high-impact early science, facilitate community readiness, and inform the development of Rubin’s operational capabilities ahead of the start of full survey operations. All data and services provided through the Rubin Early Science Program are offered on a shared-risk basis⁶⁸.

This paper describes Rubin’s second of three planned Data Previews: Data Preview 1 (DP1) (NSF-DOE Vera C. Rubin Observatory 2025). The first, Data Preview 0 (DP0)⁶⁹, contained data products produced from the processing of simulated LSST-like data sets, together with a very early version of the Rubin Science Platform (M. Jurić et al. 2019). DP1 contains data products derived from the reprocessing of science-grade exposures acquired by the Rubin Commissioning Camera (), in late 2024. The third and final Data Preview, Data Preview 2 (DP2), is planned to be based on a reprocessing of all science-grade data taken with the Rubin’s LSST Science Camera () during commissioning and is expected to be released around mid-2026.

All Rubin Data Releases and Previews are subject to a two-year proprietary period, with immediate access granted exclusively to LSST data rights holders (R. Blum & the Rubin Operations Team 2020). Data rights holders⁷⁰ are individuals or institutions with formal authorization to access proprietary data collected by the Vera C. Rubin Observatory. After the two-year proprietary period, DP1 will be made public.

In this paper, we present the contents and validation of, and the data access and community support services for, Rubin DP1, the first Data Preview to deliver data derived from observations conducted by the Vera

⁶⁸ Shared risk means early access with caveats: the community benefits from getting a head start on science, preparing analyses, and providing feedback, while also accepting that the experience may not be as polished or reliable as it will be during full operations.

⁶⁹ See <https://dp0.lsst.io>

⁷⁰ See <https://www.lsst.org/scientists/international-drh-list>

C. Rubin Observatory. DP1 is based on the reprocessing of 1792 science-grade exposures acquired during the first on-sky commissioning campaign conducted in late 2024. It covers a total area of approximately $\sim 15 \text{ deg}^2$, distributed across seven distinct non-contiguous fields. The data products include raw and calibrated single-epoch images, coadded images, difference images, detection catalogs, and other derived data products. DP1 is about 3.5 TB in size and contains around 2.3 million distinct astronomical objects, detected in 2644 coadded images. Full DP1 release documentation is available at <https://dp1.lsst.io>. Despite Rubin Observatory still being in commissioning and not yet complete at the time the observations were acquired, Rubin DP1 provides an important first look at the data, showcasing its characteristics and capabilities.

The structure of this paper is as follows. In §2 we describe the observatory system and overall construction completion status at the time of data acquisition, the seven fields included in DP1 and the observing strategy used. §3 summarizes the contents of DP1 and the data products contained in the release. The data processing pipelines are described in §4, followed by a description of the data validation and performance assessment in §5. §6 describes the Rubin Science Platform (RSP), a cloud-based data science infrastructure that provides tools and services to Rubin data rights holders to access, visualize and analyze peta-scale data generated by the LSST. §7 presents the Rubin Observatory’s model for community support, which emphasizes self-help via documentation and tutorials, and employs an open platform for issue reporting that enables crowd-sourced solutions. Finally, a summary of the DP1 release and information on expected future releases of data is given in §8. The appendix contains a useful glossary of terms used throughout this paper.

All magnitudes quoted are in the AB system (J. B. Oke & J. E. Gunn 1983), unless otherwise specified.

2. ON-SKY COMMISSIONING CAMPAIGN

The first Rubin on-sky commissioning campaign was conducted using the LSSTComCam. The campaign’s primary objective was to optically align the Simonyi Survey Telescope and verify its ability to deliver acceptable image quality using LSSTComCam. In addition, the campaign provided valuable operations experience to facilitate commissioning the full LSSTCam (T. Lange et al. 2024; A. Roodman et al. 2024). We note that commissioning LSSTComCam was not an objective of the campaign. Instead, LSSTComCam was used as a tool to support broader observatory commissioning, including early testing of the Active Optics System (AOS)

and the LSST Science Pipelines. As a result, many artifacts present in the data are specific to LSSTComCam and will be addressed only if they persist with LSSTCam. Accordingly, the image quality achieved during this campaign, and in the DP1 data, may not reflect the performance ultimately expected from LSSTCam.

Approximately 16,000 exposures⁷¹ were collected during this campaign, the majority in support of AOS commissioning, system-level verification, and end-to-end testing of the telescope’s hardware and software. This included over 10000 exposures for AOS commissioning, more than 2000 bias and dark calibration frames, and over 2000 exposures dedicated to commissioning the LSST Science Pipelines. For DP1, we have selected a subset of 1792 science-grade exposures from this campaign that are most useful for the community to begin preparing for early science.

At the time of the campaign, the observatory was still under construction, with several key components, such as dome thermal control, full mirror control, and the final AOS configuration either incomplete or still undergoing commissioning. As a result, image quality varied widely throughout the campaign and exhibited a broader distribution than is expected with LSSTCam. Despite these limitations, the campaign successfully demonstrated system integration and established a functional observatory.

2.1. Simonyi Survey Telescope

The Simonyi Survey Telescope (B. Stalder et al. 2024) features a unique three-mirror design, including an 8.4-meter Primary Mirror Tertiary Mirror (M1M3) fabricated from a single substrate and a 3.5-meter Secondary Mirror (M2). This compact configuration supports a wide 3.5-degree field of view while enabling exceptional stability, allowing the telescope to slew and settle in under five seconds. To achieve the scientific goals of the 10-year LSST, the Observatory must maintain high image quality across its wide field of view (Ž. Ivezić et al. 2019b). This is accomplished through the AOS (B. Xin et al. 2015; G. Megias Homar et al. 2024), which corrects, between successive exposures, wavefront distortions caused by optical misalignments and mirror surface deformations, primarily due to the effect of gravitational and thermal loads.

The AOS, which comprises an open- and a closed-loop component, optimizes image quality by aligning

⁷¹ We define an exposure as the process of exposing all LSSTComCam detectors. It is synonymous with visit in DP1. By contrast, an image is the output of a single LSSTComCam detector following an exposure.

the camera and [M2](#) relative to [M1M3](#), as well as adjusting the shapes of all three mirrors to nanometer precision. The [AOS](#) open-loop component corrects for predictable distortions and misalignments, while the closed-loop component addresses unpredictable or slowly varying aberrations using feedback from the corner wavefront sensors. The closed-loop wavefront sensing technique is curvature wavefront sensing, which infers wavefront errors in the optical system by analyzing extra- and intra-focal star images ([S. Thomas et al. 2023](#)). Since [LSSTComCam](#) lacks dedicated wavefront sensors, wavefront errors were instead estimated by defocusing the telescope ± 1.5 mm on either side of focus and applying the curvature wavefront sensing pipeline to the resulting images. Each night began with an initial alignment correction using a laser tracker to position the system within the capture range of the closed-loop algorithm ([G. Megias Homar et al. 2024](#)). Once this coarse alignment was complete, the [AOS](#) refined the optical alignment and applied mirror surfaces corrections to optimize the image quality across the [LSSTComCam](#) field of view.

During [LSST Science Pipelines](#) commissioning (§2.4), observations were conducted using the [AOS](#) in open-loop mode only, without closed-loop corrections between exposures. Closed-loop operation, which requires additional intra- and extra-focal images with [LSSTComCam](#), was not compatible with the continuous data acquisition needed by the pipelines. The image quality for these data was monitored by measuring the [Point Spread Function \(PSF\) Full Width at Half-Maximum \(FWHM\)](#), and closed-loop sequences were periodically run when image quality degradation was observed.

2.2. The LSST Commissioning Camera

[LSSTComCam](#) ([B. Stalder et al. 2022, 2020](#); [J. Howard et al. 2018](#); [SLAC National Accelerator Laboratory & NSF-DOE Vera C. Rubin Observatory 2024](#)) is a 144-megapixel version of the 3.2-gigapixel [LSSTCam](#). It covers approximately 5% of the [LSSTCam](#) focal plane area, with a field of view of $\sim 0.5 \text{ deg}^2$ ($40' \times 40'$), compared to [LSSTCam](#)'s 9.6 deg^2 . It was developed to validate camera interfaces with other observatory components and evaluate overall system performance prior to the start of [LSSTCam](#) commissioning. Although it has a smaller imaging area, [LSSTComCam](#) shares the same plate scale of $0.2''$ per pixel and is housed in a support structure that precisely replicates the total mass, center of gravity, and physical dimensions of [LSSTCam](#). All mechanical and utility interfaces to the telescope are implemented identically, enabling full end-to-end testing of observatory systems, including readout electronics, image acquisition, and data pipelines.

The [LSSTCam](#) focal plane is composed of 21 modular science rafts for imaging, arranged in a 5×5 grid, together with 4 additional corner rafts dedicated to guiding and wavefront sensing. Each raft is a self-contained unit comprising nine $4K \times 4K$ [Charge-Coupled Device \(CCD\)](#) sensors arranged in a 3×3 mosaic, complete with integrated readout electronics and cooling systems. Each sensor is subdivided into 16 segments arranged in a 2×8 layout, with each segment consisting of approximately 512×2048 pixels and read out in parallel using individual amplifiers. [LSSTCam](#) uses CCD sensors from two vendors: [Imaging Technology Laboratory \(University of Arizona \(UA\)\) \(UA\)](#) and [Teledyne \(E2V\)](#). To maintain uniform performance and calibration each raft is populated with sensors from only one vendor.

[LSSTComCam](#) consists of a single science raft equipped exclusively with [ITL](#) sensors. The sensors selected for [LSSTComCam](#) represent the best performing of the remaining [ITL](#) devices after the [LSSTCam](#) rafts were fully populated. They exhibit known issues such as high readout noise (e.g., Detector 8) and elevated [Charge Transfer Inefficiency \(CTI\)](#) (e.g., Detector 5). As a result, certain image artifacts present in the [DP1](#) dataset may be specific to [LSSTComCam](#). Although the cryostat in [LSSTComCam](#) uses a different cooling system ([Cryotels](#)), [LSSTComCam](#) incorporated a refrigeration pathfinder to validate the cryogenic refrigeration system intended for [LSSTCam](#).

[Figure 1](#) shows the single-raft [LSSTComCam](#) positioned at the center of the full [LSSTCam](#) focal plane, corresponding to the central science raft position. [LSSTComCam](#) is designated as Raft 22 (R22).

The [LSSTCam](#) and [LSSTComCam](#) focal planes are described in detail in [Plazas Malagón, A. et al. \(2025\)](#).

2.2.1. Filter Complement

[LSSTComCam](#) supports imaging with six broadband filters *ugrizy* spanning 320–1050 nm, identical in design to [LSSTCam](#). However, its filter exchanger can hold only three filters at a time, compared to five in [LSSTCam](#). The full-system throughput of the six [LSSTComCam](#) filters, which encompasses contributions from a standard atmosphere at airmass 1.2, telescope optics, camera surfaces, and the mean [ITL](#) detector quantum efficiency is shown in [Figure 3](#).

2.3. Flat Field System

During the on-sky campaign, key components of the Rubin calibration system ([P. Ingraham et al. 2022](#)), including the flat field screen, had not yet been installed. As a result, flat fielding for [DP1](#) relied entirely on twilight flats. While twilight flats pose challenges such as non-uniform illumination and star print-

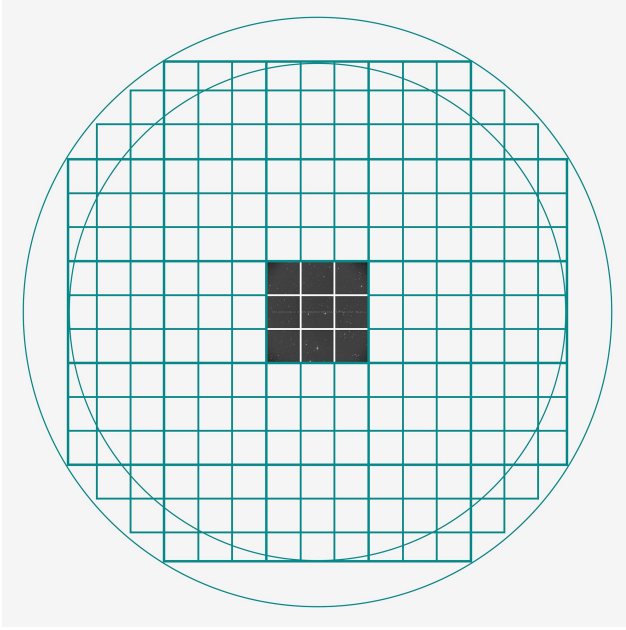


Figure 1. Schematic showing the single-raft **LSSTComCam** positioned at the center of the full LSSTCam focal plane. The perspective is from above, looking down through the **LSSTComCam** lenses onto the focal plane. Credit: RubinObs/NOIRLab/SLAC/NSF/DOE/AURA.

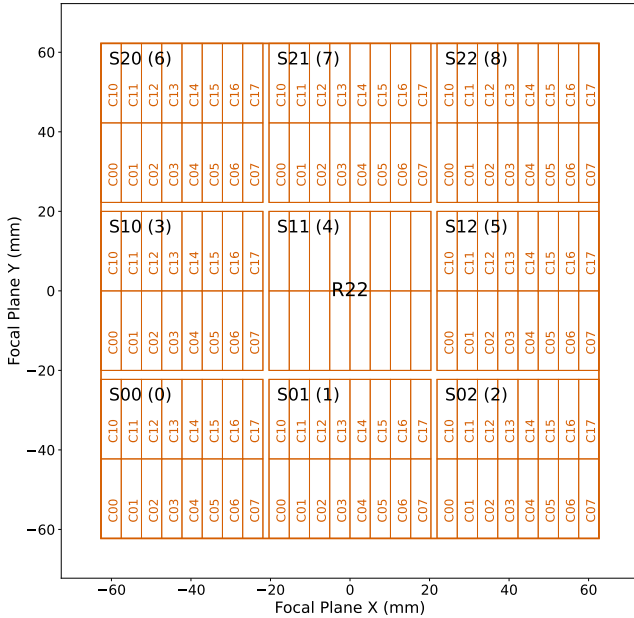


Figure 2. LSSTComCam focal plane layout illustrating the placement and numbering scheme of sensors (S) and amplifiers (C). The view is looking down from above the focal plane through the **LSSTComCam** lenses. Each sensor contains 16 amplifiers, and a group of nine sensors comprises one raft. **LSSTComCam** is Raft 22 (R22). The detector number for each sensor is shown in parentheses.

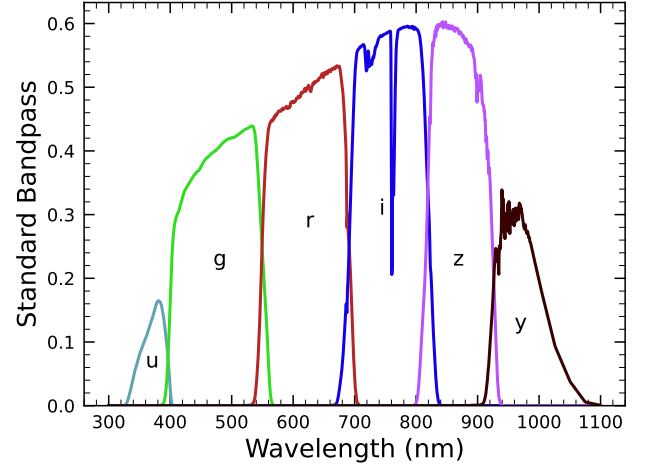


Figure 3. LSSTComCam standard bandpasses, illustrating full system throughput. The bandpasses include a standard atmosphere at airmass 1.2, telescope optics, camera surfaces, and mean **ITL** detector quantum efficiency.

through, they were the only available option during **LSSTComCam** commissioning and for DP1 processing. To mitigate these limitations, dithered, tracked exposures were taken over a broad range of azimuth and rotator angles to construct combined flat calibration frames. Exposure times were dynamically adjusted to reach target signal levels of between 10,000 and 20,000 electrons. Future campaigns will benefit from more stable and uniform flat fielding using the Rubin flat field system, described in P. Fagelius & E. Rykoff (2025).

2.4. LSST Science Pipelines Commissioning

Commissioning of the **LSST Science Pipelines** (Rubin Observatory Science Pipelines Developers 2025) began once the telescope was able to routinely deliver sub-arcsecond image quality. The goals included testing the internal astrometric and photometric calibration across a range of observing conditions, validating the difference image analysis and Prompt Processing (K.-T. Lim 2022) framework, and accumulating over 200 visits per band to evaluate deep coadded images with integrated exposure times roughly equivalent to those of the planned **LSST Wide Fast Deep (WFD)** 10-year depth. To support these goals, seven target fields were selected that span a range of stellar densities, overlap with external reference datasets, and collectively span the full breadth of the four primary **LSST** science themes. These seven fields form the basis of the DP1 dataset. Figure 4 shows the locations of these seven fields on the sky, overlaid on the LSST baseline survey footprint (R. L. Jones 2021; P. Yoachim 2022; Z. Ivezić 2022; The Rubin Observatory Survey Cadence Optimization Committee 2023, 2025), along with sky coverage of both the LSSTCam

and LSSTComCam focal planes. Each of the seven target fields was observed repeatedly in multiple bands over many nights. A typical observing epoch for a given target field consisted of 5-20 visits in each of the three loaded filters. All DP1 images were captured as single 30-second exposures for all bands, rather than as 2×15 -second “snap” exposures. Additionally, some u-band exposures were taken as 38-second exposures. The exposure time for LSST images will be determined after further testing during the commissioning phase with LSSTCam. All images were acquired using the Rubin Feature-Based Scheduler (FBS), version 3.0 (E. Naghib et al. 2019; P. Yoachim et al. 2024). Table 1 lists the seven DP1 fields and their pointing centers, and provides a summary of the band coverage in each.

The temporal sampling distribution of observations per band and per night is shown in Figure 5. Gaps in coverage across some bands arise from the fact that LSSTComCam can only accommodate three filters at a time (see §2.2). As the campaign progressed, the temporal sampling became denser across all fields, reflecting improved efficiency and increased time allocated for science observations. The Extended Chandra Deep Field-South Survey (ECDFS) field received the most consistent and densest temporal sampling. It is important to note that the time sampling in the DP1 dataset differs significantly from what will be seen in the final LSST data. Table 2 lists the 5σ point source depths for coadded images per field and per band, where coverage in a band is non-zero.

All fields except for the low ecliptic latitude field, Rubin_SV_38_7, used a small random dithering pattern. The random translational dithers of the telescope bore-sight were applied for each visit, with offsets of up to 0.2 degrees around the pointing center (Table 1). The rotational dithers of the camera rotator were typically approximately 1 degree per visit, with larger random offsets at each filter change, which worked to keep operational efficiency high. The Rubin_SV_38_7 field used a different dither pattern to optimize coverage of Solar System Objects and test Solar System Object linking across multiple nights. These observations used a 2×2 grid of LSSTComCam pointings to cover an area of about 1.3 degree \times 1.3 degrees. The visits cycled between the grid’s four pointing centers, using small random translational dithers to fill chip gaps with the goal of acquiring 3-4 visits per pointing center per band in each observing epoch.

2.5. Delivered Image Quality

The delivered image quality is influenced by contributions from both the observing system (i.e., dome, tele-

scope and camera) and the atmosphere. During the campaign, the Rubin Differential Image Motion Monitor (DIMM) was not operational, so atmospheric seeing was estimated using live data from the Southern Astrophysical Research Telescope (SOAR) Ring-Image Next Generation Scintillation Sensor () seeing monitor, also located on Cerro Pachón. Although accelerometers mounted on the mirror cell and top-end assembly were available to track dynamic optics effects, such as mirror oscillations that can degrade optical alignment, this data was not used during the campaign. Mount encoder data were used to measure the mount jitter in every image, with a measured median contribution of 0.004 arcseconds to image degradation. As the pointing model was not fine tuned, tracking errors could range from 0.2 to 0.4 arcseconds per image, depending on RA and Dec. Dome and mirror-induced seeing were not measured during the campaign. The DP1 median delivered image quality across all bands is $1.14''$, as measured by the PSF FWHM. The best images achieved a PSF FWHM of approximately $0.58''$. Ongoing efforts aim to quantify all sources of image degradation, including contributions from the camera system, static and dynamic optical components, telescope mount motion, observatory-induced seeing from the dome and mirror, and atmospheric conditions.

3. OVERVIEW OF THE CONTENTS OF RUBIN DP1

Here we describe Rubin DP1 data products and provide summary statistics for each. The DP1 science data products are derived from the 15972 individual CCD images taken across 1792 exposures in the seven LSSTComCam commissioning fields (§2.4).

The data products that comprise DP1 provide an early preview of future LSST data releases and are strongly dependent on the type and quality of the data that was collected during LSSTComCam on-sky campaign (§2.4). Consequently not all anticipated LSST data products, as described in the Data Product Definition Document () (M. Jurić et al. 2023) were produced for the DP1 dataset.

Rubin Observatory has adopted the convention by which single-epoch detections are referred to as Sources. By contrast, the astrophysical object associated with a given detection is referred to as an Object.⁷² As such, a given Object will likely have multiple associated Sources, since it will be observed in multiple epochs.

⁷² We caution that this nomenclature is not universal; for example, some surveys call “detections” what we call “sources”, and use the term “sources” for what we call “objects”.

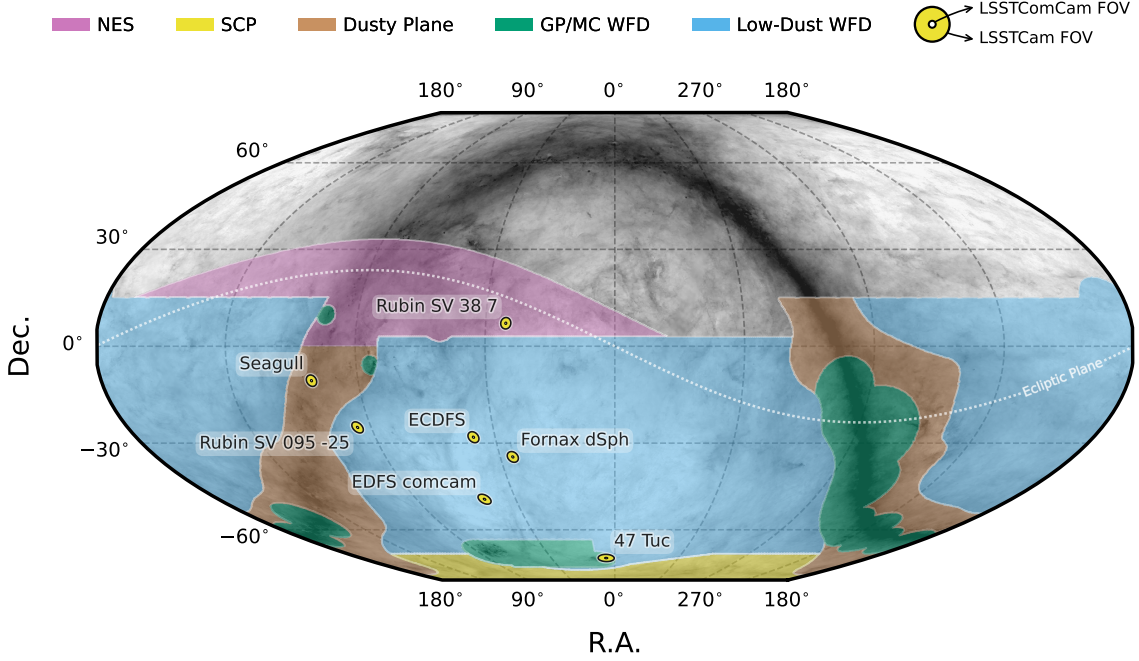


Figure 4. Locations of the seven DP1 fields overlaid on the *LSST* baseline survey footprint. NES: North Ecliptic Spur, SCP: South Celestial Pole, Low-Dust WFD: regions away from the Galactic Plane (GP) observed with a WFD cadence, GP/MC WFD: Galactic Plane and Magellanic Clouds regions observed with a WFD cadence. The field of view (FOV) covered by the *LSSTCam* and *LSSTComCam* focal planes is shown as concentric yellow circles about the pointing center of each field.

Table 1. DP1 fields and pointing centers with the number of exposures in each band per field. ICRS coordinates are in units of decimal degrees.

Field Code	Field Name	RA	DEC	Band						Total
		deg	deg	u	g	r	i	z	y	
47_Tuc	47 Tucanae Globular Cluster	6.128	-72.090	6	10	32	19	0	5	72
ECDFS	Extended Chandra Deep Field South	53.160	-28.100	43	230	237	162	153	30	855
EDFS_comcam	Rubin SV Euclid Deep Field South	59.150	-48.730	20	61	87	42	42	20	272
Fornax_dSph	Fornax Dwarf Spheroidal Galaxy	40.080	-34.450	0	5	25	12	0	0	42
Rubin_SV_095_-25	Rubin SV Low Galactic Latitude Field	95.040	-25.000	33	82	84	23	60	10	292
Rubin_SV_38_7	Rubin SV Low Ecliptic Latitude Field	37.980	7.015	0	44	40	55	20	0	159
Seagull	Seagull Nebula	106.300	-10.510	10	37	43	0	10	0	100

At the highest level, the DP1 data products fall into one of five types:

- **Images**, including single-epoch images, deep and template coadded images, and difference images;
- **Catalogs** of astrophysical Sources and Objects detected and measured in the aforementioned images. We also provide the astrometric and photometric reference catalog generated from external sources that was used during processing to generate the DP1 data products;

- **Maps**, which provide non-science-level visualizations of the data within the release. They include, for example, zoomable multi-band images and coverage maps;
- **Ancillary data products**, including, for example, the parameters used to configure the data processing pipelines, log and processing performance files, plots and metrics produced during the data processing steps, and calibration data products (e.g., CTI models, brighter-fatter kernels, etc.);

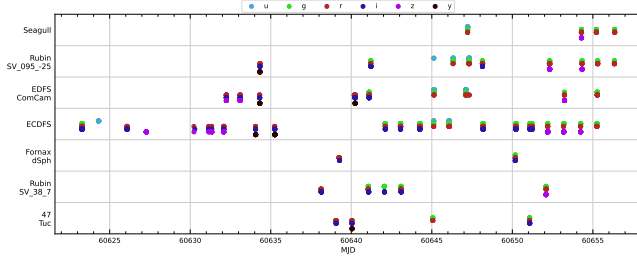


Figure 5. Distribution of DP1 observations by date grouped by field as a function of MJD. Each dot represents a single 30-second exposure, color-coded by filter.

Table 2. Median 5σ coadd detection limits per field and band.

Field Code	Band					
	u	g	r	i	z	y
47_Tuc	-	24.03	24.24	23.90	-	21.79
ECDFS	24.55	26.18	25.96	25.71	25.07	23.10
EDFS_comcam	23.42	25.77	25.72	25.17	24.47	23.14
Fornax_dSph	-	24.53	25.07	24.64	-	-
Rubin_SV_095_-25	24.29	25.46	24.95	24.86	24.32	22.68
Rubin_SV_38_7	-	25.46	25.15	24.86	23.52	-
Seagull	23.51	24.72	24.19	-	23.30	-

- **Metadata** in the form of tables containing information about each visit and processed image, such as pointing, exposure time, and a range of image quality summary statistics.

While images and catalogs are expected to be the primary data products for scientific research, we also recognize the value of providing access to other data types to support investigations and ensure transparency.

To facilitate processing, Rubin DP1 uses a single skymap⁷³ that covers the entire sky area encompassing the seven DP1 fields. The DP1 skymap divides the entire celestial sphere into 18938 tracts, each covering approximately 2.8 deg^2 . Each tract is further subdivided into 10×10 equally-sized patches, with each patch covering roughly 0.028 deg^2 . Both tracts and patches overlap with their neighboring regions. Since the LSSTComCam only observed $\sim 15 \text{ deg}^2$ of the sky during its campaign, only 29 out of the 18938 tracts have coverage in DP1. The tract identification numbers and correspond-

⁷³ A skymap is a tiling of the celestial sphere, organizing large-scale sky coverage into manageable sections for processing and analysis.

Table 3. Tract coverage of each DP1 field. The size of a tract is larger than the LSSTCam field of view; however, since each observed field extends across more than one tract, each field covers multiple tracts.

Field Code	Tract ID
ECDFS	4848, 4849, 5062, 5063, 5064
Seagull	7610, 7611, 7849, 7850
Rubin_SV_38_7	10221, 10222, 10463, 10464, 10704, 10705
EDFS_comcam	2234, 2235, 2393, 2394
Rubin_SV_095_-25	5305, 5306, 5525, 5526
47_Tuc	453, 454
Fornax_dSph	4016, 4017, 4217, 4218

ing target names for these tracts are listed in Table 3. The size of a tract is larger than the LSSTCam field of view; however, since each observed field extends across more than one tract, each field covers multiple tracts.

The skymap is integral to the production of co-added images. To create a coadded image, the processing pipeline selects all calibrated science images in a given field that meet specific quality thresholds (§3.1 and §4.5.1) for a given patch, warps them onto a single consistent pixel grid for that patch, as defined by the skymap, then coadds them. Each individual coadd image therefore covers a single patch. Coadded images and the catalogs of detections from them are termed **tract-level** data products. By contrast, **visit-level** data products are those derived from individual LSSTComCam exposures, such as a raw image or a catalog of detections from a single calibrated image. Most science data products (i.e., images and catalogs) in DP1 are either **tract** or **visit**-level, the main exception being the **Calibration** reference catalog.

Throughout this section, the data product names are indicated using **monospace** font. Data products are accessed via either the **International Virtual-Observatory Alliance (IVOA) Services** (§6.2.1) or the **Data Butler** (§6.2.2), or both.

3.1. Science Images

Science images are exposures of the night sky, as distinct from **calibration** images (§3.5.2). Although the release includes **calibration** images, allowing users to reprocess the raw images if needed, this is expected to be necessary only in rare cases. Users are strongly encouraged to start from the visit-level images provided. The data product names shown here are those used by

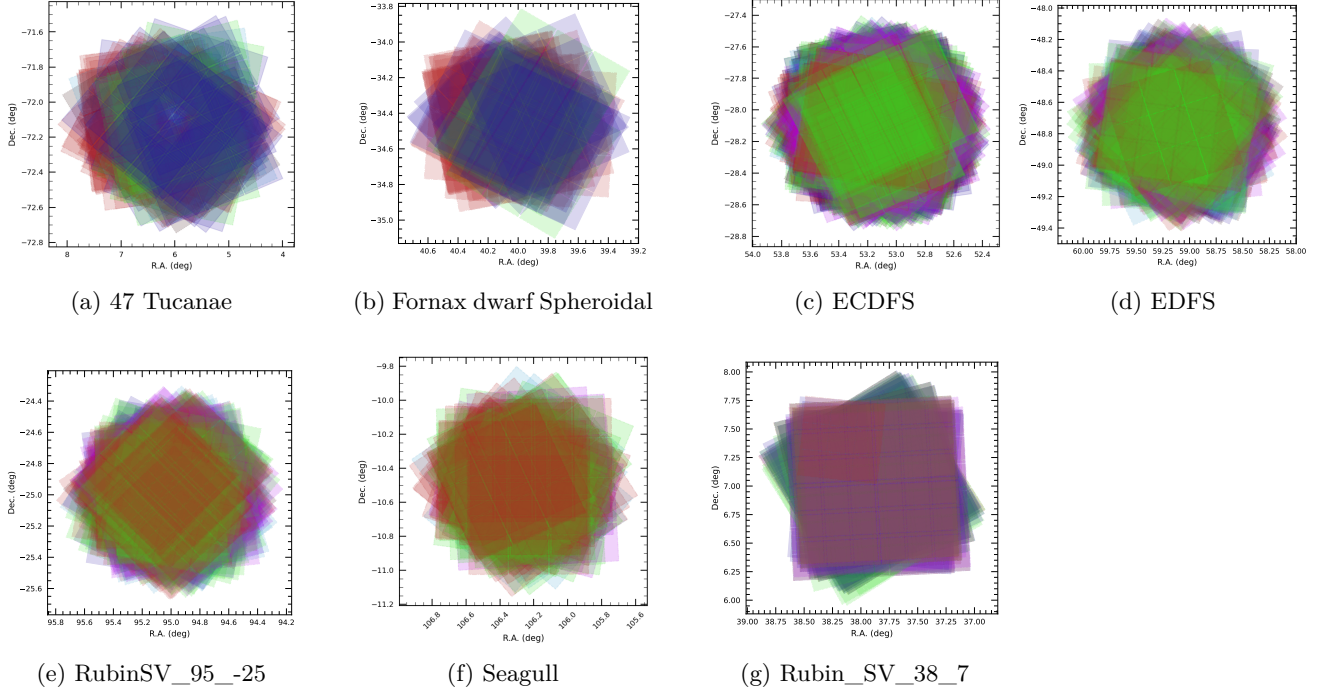


Figure 6. Sky coverage maps showing the distribution of visits in each field, color coded by band. The images clearly show the focal plane chip gaps and dithering pattern. Only the detectors for which single frame processing succeeded are included in the plots, which explains why the central region of 47_Tuc looks thinner than the other fields.

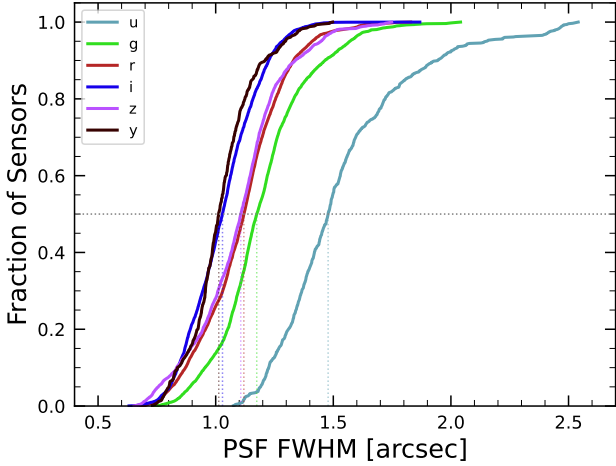


Figure 7. Cumulative distribution of PSF FWHM (arcsec) over all 16071 visits images in the DP1 dataset for each filter. The vertical dashed lines represent the median PSF FWHMs of 1.46, 1.36, 1.24, 1.18 and 1.20 arcsec for the ugrizy wavebands, respectively

the Data Butler, but the names used in the IVOA Services differ only slightly in that they are prepended by “lsst.”.

- **raw** images (NSF-DOE Vera C. Rubin Observatory 2025a) are unprocessed data received directly from the camera. Each **raw** corresponds to a sin-

gle **CCD** from a single LSSTComCam exposure of 30 s duration. Each LSSTComCam exposure typically produces up to nine **raws**, one per sensor in the focal plane. However, a small number of exposures resulted in fewer than nine **raw** images due to temporary hardware issues or readout faults.

In total, DP1 includes 16125 **raw** images. Table 4 provides a summary by target and band. A **raw** contains 4608×4096 pixels, including prescan and overscan, and occupies around 18 MB of disk space.⁷⁴ The field of view of a single **raw**, excluding prescan and overscan regions, is roughly $0.23^\circ \times 0.22^\circ \approx 0.051 \text{ deg}^2$, corresponding to a plate scale of $0.2''$ per pixel.

- **visit_images** (NSF-DOE Vera C. Rubin Observatory 2025b) are fully-calibrated processed images. They have undergone instrument signature removal (§4.2.1) and all the single frame processing steps described in §4.2 which are, in summary: PSF modeling, background subtraction, and astrometric and photometric calibration. As with

⁷⁴ Each amplifier image contains 3 and 64 columns of serial prescan and overscan pixels, respectively, and 48 rows of parallel overscan pixels, meaning a **raw** contains 4072×4000 exposed pixels.

Table 4. Number of `rawImages` per field and band.

Field Code	Band						Total
	u	g	r	i	z	y	
47_Tuc	54	90	288	171	0	45	648
ECDFS	387	2070	2133	1455	1377	270	7692
EDFS_comcam	180	549	783	378	378	180	2448
Fornax_dSph	0	45	225	108	0	0	378
Rubin_SV_095_-25	297	738	756	207	540	90	2628
Rubin_SV_38_7	0	396	360	495	180	0	1431
Seagull	90	333	387	0	90	0	900
Total	1008	4221	4932	2814	2565	585	16125

raws, a `visit_image` contains processed data from a single CCD resulting from a single 30 s LSST-ComCam exposure. As a consequence, a single LSSTComCam exposure typically results in nine `visit_images`. The handful of exposures with fewer than nine raw images also have fewer than nine `visit_images`, but there are an additional 153 raw that failed processing and for which there is thus no corresponding `visit_image`. Almost all failures were due to challenges with astrometric fits or PSF models in crowded fields.

In total, there are 15972 `visit_images` in DP1. Each `visit_image` comprises three images: the calibrated science image, a variance image, and a pixel bitmask, indicating, for example, bad or saturated pixels, pixels affected by cosmic rays, pixels associated with detected sources, etc. Each `visit_image` also contains a position-dependent PSF model, World Coordinate System () information, and various metadata providing information about the observation and processing. The science and variance images and the pixel mask each contain 4072×4000 pixels. In total, a single `visit_image`, including all extensions and metadata, occupies around 110 MB of disk space.

- `deep_coadds` (NSF-DOE Vera C. Rubin Observatory 2025c) are the product of warping and co-adding multiple `visit_images` covering a given patch, as defined by the skymap. `deep_coadds` are created on a per-band basis, meaning only data from exposures taken with a common filter are coadded. As such, there are up to six `deep_coadds` covering each patch – one for each of the six LSSTComCam bands. The process of producing `deep_coadds` is described in detail in §4.5 but, to summarize, it involves the selection of suitable

`visit_images` (both in terms of patch coverage, band, and image quality), the warping of those `visit_images` onto a common pixel grid, and the co-adding of the warped `visit_images`. To be included in a DP1 `deep_coadd`, a `visit_image` needed to have a PSF FWHM smaller than $1.7''$. Of the 15972 `visit_images`, 15375 satisfied this criterion and were therefore used to create `deep_coadds`.

There are a total of 2644 `deep_coadds` in DP1. As mentioned above, a single `deep_coadd` covers one patch, and includes a small amount of overlap with its neighboring patch. The skymap used for DP1 defines a patch as having an on-sky area of 0.028 deg^2 excluding overlap, and 0.036 deg^2 including overlap. A single `deep_coadd` – including overlap – contains 3400×3400 equal-sized pixels, corresponding to a platescale of $0.2''$ per pixel. Each `deep_coadd` contains the science image (i.e., the coadd), a variance image, and a pixel mask; all three contain the same number of pixels. Each `deep_coadd` also contains a position-dependent PSF model (which is the weighted sum of the PSF models of the input `visit_images`), WCS information, plus various metadata.

Since coadds always cover an entire patch, it is fairly common for a `deep_coadd` to contain regions that were not covered by any of the selected `visit_images`, particularly if the patch is on the outskirts of a field and was thus not fully observed. By the nature of how coadds are produced, such regions may contain seemingly valid flux values (i.e., not necessarily zeros or NaNs), but will instead be flagged with the NO_DATA flag in the pixel mask. It is therefore crucial that the pixel mask is referred to when analyzing `deep_coadds`.

• `template_coadds` (NSF-DOE Vera C. Rubin Observatory 2025d) are those created to use as templates for difference imaging, i.e., the process of subtracting a template image from a `visit_image` to identify either variable or `transient` objects.⁷⁵ As with `deep_coadds`, `template_coadds` are produced by warping and co-adding multiple `visit_images` covering a given skymap-defined `patch`. The process of building `template_coadds` is the same as that for `deep_coadds`, but the selection criteria differ between the two types of coadd. In the case of `template_coadds`, one third of `visit_images` covering the `patch` in question with the narrowest `PSF FWHM` is selected. If one third corresponds to fewer than twelve `visit_images` (i.e., there are fewer than 36 `visit_images` covering the `patch`), then the twelve `visit_images` with the narrowest `PSF FWHM` are selected. Finally, if there are fewer than twelve `visit_images` covering the `patch`, then all `visit_images` are selected. Of the 15972 `visit_images`, 13113 were used to create `template_coadds`. This selection strategy is designed to optimize for `seeing` when a `patch` is well-covered by `visit_images`, yet still enable the production of `template_coadds` for poorly-covered patches.

DP1 contains a total of 2730 `template_coadds`.⁷⁶ As with `deep_coadds`, a single `template_coadd` covers a single `patch`. Since the same `skymap` is used when creating both `deep_coadd` and `template_coadds`, the on-sky area and pixel count of `template_coadds` are the same as that of a `deep_coadd` (see above). Similarly, `template_coadds` contain the science image (i.e., the coadd), a variance image, and a pixel mask; all three contain the same number of pixels. Also included are the `PSF` model, `WCS` information, and `metadata`. As is the case for `deep_coadd`, those pixels within `template_coadds` that are not covered by any of the selected `visit_images` may still have seemingly valid values, but are indicated with the `NO_DATA` flag within the pixel mask.

⁷⁵ It should be noted that `template_coadds` are not themselves subtracted from `visit_images` but are, instead, warped to match the `WCS` of a `visit_image`. It is this warped template that is subtracted from the `visit_image` to create a difference image. For storage space reasons, warped templates are not retained for DP1, as they can be readily and reliably recreated from the `template_coadds`.

⁷⁶ The difference in the number of `deep_coadds` and `template_coadds` is due to the difference in the `visit_image` selection criteria for each coadd.

• `difference_images` (NSF-DOE Vera C. Rubin Observatory 2025e) are generated by the subtraction of the warped, scaled, and `PSF`-matched `template_coadd` from the `visit_image` (see §4.6.1). In principle, only those sources whose `flux` has changed relative to the `template_coadd` should be apparent (at a significant level) within a `difference_image`. In practice, however, there are numerous spurious sources present in `difference_images` due to unavoidably imperfect template matching.

In total, there are 15972 `difference_images` in DP1, one for each `visit_image`.

Like `visit_images`, `difference_images` contain the science (i.e., difference) image, a variance image, and a pixel mask; all three contain the same number of pixels, which is the same as that of the input `visit_image`. Also included is the `PSF` model, `WCS` information, and `metadata`.

• Background images contain the model `background` that has been generated and removed from a science image. `visit_images`, `deep_coadds` and `template_coadds` all have associated `background` images.⁷⁷ Background images contain the same number of pixels as their respective science image, and there is one `background` image for each `visit_image`, `deep_coadd`, and `template_coadd`. Difference imaging analysis also measures and subtracts a `background` model, but the `difference_background` data product is not written out by default and is not part of DP1.

Background images are not available via the IVOA Service; they can only be accessed via the Butler Data Service.

3.2. Catalogs

Here we describe science-ready tables produced by the science pipelines. All but one of the catalogs described here contain data for detections in the images described in §3.1, the exception being the `Calibration` catalog, which contains reference data obtained from previous surveys. Observatory-produced `metadata` tables are described in §3.4 Each type of catalog contains measurements for either Sources detected in `visit_images` and `difference_images`, or Objects detected in `deep_coadds`.

While the `Source`, `Object`, `ForcedSource`, `DiaSource`, `DiaObject`, and `ForcedSourceOnDiaObject`

⁷⁷ In future data releases, `background` images may be included as part of their respective science image data product.

catalogs described below each differ in terms of their specific columns, in general they each contain: one or more unique identification number, positional information, one or more types of **flux** measurements (e.g., aperture fluxes, **PSF** fluxes, Gaussian fluxes, etc.), and a series of boolean flags (indicating, for example, whether the source/object is affected by saturated pixels, cosmic rays, etc.) for each source/object. The Solar System catalogs **SSObject** and **SSSource** deviate from this general structure in that they instead contain orbital parameters for all known asteroids. Where applicable, all measured properties are reported with their associated 1σ uncertainties.

Since **DP1** is a preview, it doesn't include all the catalogs expected in a full **LSST Data Release**. Additionally, the catalogs it does include may be missing some columns planned for future releases. Where this is the case, we note what data are missing in the catalog descriptions that follow.

Catalog data are stored in the **Qserv** database (§6.5.1) and are accessible via **Table Access Protocol (IVOA standard)** (IVOA), and an online **DP1** catalog schema is available at <https://sdm-schemas.lsst.io/dp1.html>. Catalog data are also accessible via the **Data Butler** (§6.2.2).

- The **Source** catalog (**NSF-DOE Vera C. Rubin Observatory 2025f**) contains data on all sources which are, prior to deblending, detected with a greater than 5σ significance in each individual visit. The detections reported in the **Source** catalog have undergone deblending; in the case of blended detections, only the deblended sources are included in the **Source** catalog. It is important to note that while the criterion for inclusion in a **Source** catalog is a $> 5\sigma$ detection in a **visit_image** prior to deblending, the positions and fluxes are reported post-deblending. Hence, it is possible for the **Source** catalog to contain sources whose **flux-to-error** ratios – potentially of all types (i.e., aperture **flux**, **PSF flux**, etc.) – are less than 5.

In addition to the general information mentioned above (i.e., IDs, positions, fluxes, flags), the **Source** catalog also includes basic **shape** and extendedness information.

The **Source** catalog contains data for 46 million sources in **DP1**.

- The **Object** catalog (**NSF-DOE Vera C. Rubin Observatory 2025g**) contains data on all objects detected with a greater than 5σ significance in the **deep_coadds**. With coadd images produced on a

per-band basis, a $> 5\sigma$ detection in one or more of the bands will result in an object being included in the **Object** catalog. For cases where an object is detected at $> 5\sigma$ in more than one band, a cross-matching has been performed between bands to associate an object in one band with its counterpart(s) in the other bands. As such, unlike the **Source** catalog, the **Object** catalog contains data from multiple bands. The objects reported in the **Object** catalog have also undergone deblending; in the case of blended detections, only the deblended child objects are included in the catalog. As with the **Source** catalog, the criterion for inclusion in the **Object** catalog is a $> 5\sigma$ detection in one of the **deep_coadds** prior to deblending, yet the positions and fluxes of objects are reported post-deblending. Hence, it is possible for **Object** catalog to contain objects whose **flux-to-error** ratios — potentially of all types and in all bands — are less than 5.

In addition to the general information mentioned above (i.e., IDs, positions, fluxes, flags), the **Object** catalog also includes basic **shape** and extendedness information. While they may be included in future data releases, no photometric redshifts, Petrosian magnitudes (**V. Petrosian 1976**), proper motions or periodicity information are included in the **DP1** object catalogs.

The **Object** catalog contains data for 2.3 million objects in **DP1**.

- The **ForcedSource** catalog (**NSF-DOE Vera C. Rubin Observatory 2025h**) contains forced **PSF** photometry measurements performed on both **difference_images** (i.e., the **psfDiffFlux** column) and **visit_images** (i.e., the **psfFlux** column) at the positions of all the objects in the **Object** catalog. We recommend using the **psfDiffFlux** column when generating lightcurves because this quantity is less sensitive to **flux** from neighboring sources than **psfFlux**. As well as **forced photometry PSF** fluxes, a number of boolean flags are also included in the **ForcedSource** catalog.

The **ForcedSource** catalog contains a total of 269 million entries across 2.3 million unique objects.

- The **DiaSource** catalogs (**NSF-DOE Vera C. Rubin Observatory 2025i**) contains data on all the sources detected at a $> 5\sigma$ significance — including those associated with known Solar System objects — in the **difference_images**. Unlike sources detected in **visit_images**, sources detected in

difference images (hereafter, “DiaSources”) have gone through an association step during which an attempt has been made to associate them with into underlying objects called “DiaObject”s. The `DiaSource` catalog consolidates all this information across multiple visits and bands. The detections reported in the `DiaSource` catalog have not undergone deblending.

The `DiaSource` catalog contains data for 3.1 million `DiaSources` in DP1.

- The `DiaObject` catalog ([NSF-DOE Vera C. Rubin Observatory 2025j](#)) contains the astrophysical objects that `DiaSources` are associated with (i.e., the “DiaObjects”). The `DiaObject` catalog contains only non-Solar System Objects; Solar System Objects are, instead, recorded in the `SSObject` catalog. When a `DiaSource` is identified, the `DiaObject` and `SSObject` catalogs are searched for objects to associate it with. If no association is found, a new `DiaObject` is created and the `DiaSource` is associated to it. Along similar lines, an attempt has been made to associate `DiaObjects` across multiple bands, meaning the `DiaObject` catalog – like the `Object` catalog – contains data from multiple bands. Since `DiaObjects` are typically [transient](#) or variable (by the nature of their means of detection), the `DiaObject` catalog contains summary statistics of their fluxes, such as the mean and standard deviation over multiple epochs; users must refer to the `ForcedSourceOnDiaObject` catalog (see below) or the `DiaSource` catalog for single [epoch flux](#) measurements of `DiaObjects`.

The `DIAObject` catalog contains data for 1.1 million `DiaObjects` in DP1.

- The `ForcedSourceOnDiaObject` catalog ([NSF-DOE Vera C. Rubin Observatory 2025k](#)) is equivalent to the `ForcedSource` catalog, but contains [forced photometry](#) measurements obtained at the positions of all the `DiaObjects` in the `DiaObject` catalog.

The `ForcedSourceOnDiaObject` catalog contains a total of 197 million entries across 1.1 million unique `DiaObjects`.

- The `CcdVisit` catalog ([NSF-DOE Vera C. Rubin Observatory 2025l](#)) contains data for each individual processed `visit_image`. In addition to technical information, such as the on-sky coordinates of the central pixel and measured pixel scale, the `CcdVisit` catalog contains a range of data quality measurements, such as whole-image summary

statistics for the [PSF](#) size, zeropoint, sky [background](#), sky noise, and quality of [astrometry](#) solution. It provides an efficient method to access `visit_image` properties without needing to access the image data.

The `CcdVisit` catalog contains entries summarizing data for all 16071 `visit_images`.

- The `SSObject` catalog ([NSF-DOE Vera C. Rubin Observatory 2025a](#)), `Minor Planet Center Orbit database` () and `SSObject`, carry information about Solar System Objects. The `MPCORB` table provides the Minor Planet [Center](#)-computed orbital elements for all known asteroids, including those that Rubin discovered. For DP1, the `SSObject` catalog serves primarily to provide the mapping between the [International Astronomical Union \(IAU\)](#) designation of an object (listed in `MPCORB`), and the internal `ssObjectId` identifier, which is used as a key to find solar system object observations in the `DiaSource` and `SSSource` tables.
- The `SSSource` catalog ([NSF-DOE Vera C. Rubin Observatory 2025b](#)) contains data on all `DiaSources` that are either associated with previously-known Solar System Objects, or have been confirmed as newly-discovered Solar System Objects by confirmation of their orbital properties. As entries in the `SSSource` catalog stem from the `DiaSource` catalog, they have all been detected at $> 5\sigma$ significance in at least one band. The `SSSource` catalog contains data for 5988 Solar System Sources.
- The `Calibration` catalog is the reference catalog that was used to perform astrometric and photometric [calibration](#). It is a whole-sky catalog built specifically for [LSST](#), as no single prior reference catalog had both the depth and coverage needed to calibrate [LSST](#) data. It combines data from multiple previous reference catalogs and contains only stellar sources. Full details on how the `Calibration` catalog was built are provided in [P. Ferguson et al. \(2025\)](#). We provide a brief summary here.

For the *grizy* bands, the input catalogs were (in order of decreasing priority): [Dark Energy Survey \(DES\) Y6 Calibration Stars](#) ([E. S. Rykoff et al. 2023](#)); [Gaia-B or R Photometry \(Gaia\)](#) () [Synthetic Magnitudes](#) ([Gaia Collaboration et al. 2023](#)); the [Panoramic Survey Telescope and Rapid Response System \(Pan-STARRS\)](#)1 [3PI Survey](#) ([K. C. Chambers et al. 2016](#)); [Data Re-](#)

lease 2 of the SkyMapper survey (C. A. Onken et al. 2019); and Data Release 4 of the Very Large Telescope (European Southern Observatory (ESO)) (ESO) Survey Telescope (ESO) Asteroid Terrestrial-impact Last Alert System () survey (T. Shanks et al. 2015). For the u -band, the input catalogs were (in order of decreasing priority): Standard Stars from Sloan Digital Sky Survey () Data Release 16 (R. Ahumada et al. 2020); Gaia-XP Synthetic Magnitudes (Gaia Collaboration et al. 2023); and synthetic magnitudes generated using Stellar Locus Regression (SLR), which estimates the u -band flux from the g -band flux and $g-r$ colors. This latter input (i.e., SLR estimates) was used to boost the number of u -band reference sources, as otherwise the source density from the u -band input catalogs is too low to be useful for the LSST.

Only stellar sources were selected from each input catalog. Throughout, the Calibration catalog uses the DES bandpasses for the *grizy*-bands and the SDSS bandpass for the u -band; color transformations derived from high quality sources were used to convert fluxes from the various input catalogs (some of which did not use the DES/SDSS bandpasses) to the respective bandpasses. All sources from the input catalogs are matched to Gaia-Data Release 3 () sources for robust astrometric information, selecting only isolated sources (i.e., no neighbors within $1''$).

After collating the input catalogs and transforming the fluxes to the standard DES/SDSS bandpasses, the catalog was used to identify sources within a specific region of the sky. This process generated a set of standard columns containing positional and flux information, along with their associated uncertainties.

3.3. Maps

Maps are two-dimensional visualizations of survey data. In DP1, these fall into two categories: Survey Property Maps and Hierarchical Progressive Survey (IVOA standard) (IVOA) Maps (P. Fernique et al. 2015).

3.3.1. Survey Property Maps

Survey Property Maps (NSF-DOE Vera C. Rubin Observatory 2025) summarize how properties such as observing conditions or exposure time vary across the observed sky. Each map provides the spatial distribution of a specific quantity at a defined sky position for each band by aggregating information from the images used

to make the `deep_coadd`. Maps are initially created per-tract and then combined to produce a final consolidated map. At each sky location, represented by a spatial pixel in the Hierarchical Equal-Area iso-Latitude Pixelisation (HEALPix)(K. M. Górski et al. 2005) grid, values are derived using statistical operations, such as minimum, maximum, mean, weighted mean, or sum, depending on the property.

DP1 contains 29 survey property maps. The available maps describe total exposure times, observation epochs, PSF size and shape, PSF magnitude limits, sky background and noise levels, as well as astrometric shifts and PSF distortions due to wavelength-dependent atmospheric Differential Chromatic Refraction () effects. They all use the dataset type format `deep_coadd_<PROPERTY>_consolidated_map_<STATISTIC>` e.g., `deep_coadd_exposure_time_consolidated_map_sum` provides a spatial map of the total exposure time accumulated per sky position in units of seconds. All maps are stored in HealSparse⁷⁸ format. Survey property maps are only available via the Data Butler (§6.2.2) and have dimensions `band` and `skymap`.

Figure 8 presents three survey property maps for exposure time, PSF magnitude limit, and sky noise, computed for representative tracts and bands. Because full consolidated maps cover widely separated tracts, we use clipped per-tract views here to make the spatial patterns more discernible. Many more survey property maps are available in the DP1 repository.

3.3.2. HiPS Maps

HiPS Maps (P. Fernique et al. 2015), offer an interactive way to explore seamless, multi-band tiles of the sky regions covered by DP1, allowing for smooth panning and zooming. DP1 provides multi-band HiPS images created by combining data from individual bands of `deep_coadd` and `template_coadd` images. These images are false-color representations generated using various filter combinations for the red, green, and blue channels. The available filter combinations include *gri*, *izy*, *riz*, and *ugr* for both `deep_coadd` and `template_coadd`. Additionally, for `deep_coadd` only, we provide color blends such as *uug* and *grz*. Post-DP1, we plan to also provide single-band HiPS images for all *ugrizy* bands in both Portable Network Graphics (PNG) and Flexible Image Transport System () formats.

HiPS maps are only accessible through the HiPS viewer in the Rubin Science Platform () Portal (§6.3)

⁷⁸ A sparse HEALPix representation that efficiently encodes data values on the celestial sphere. <https://healsparse.readthedocs.io>

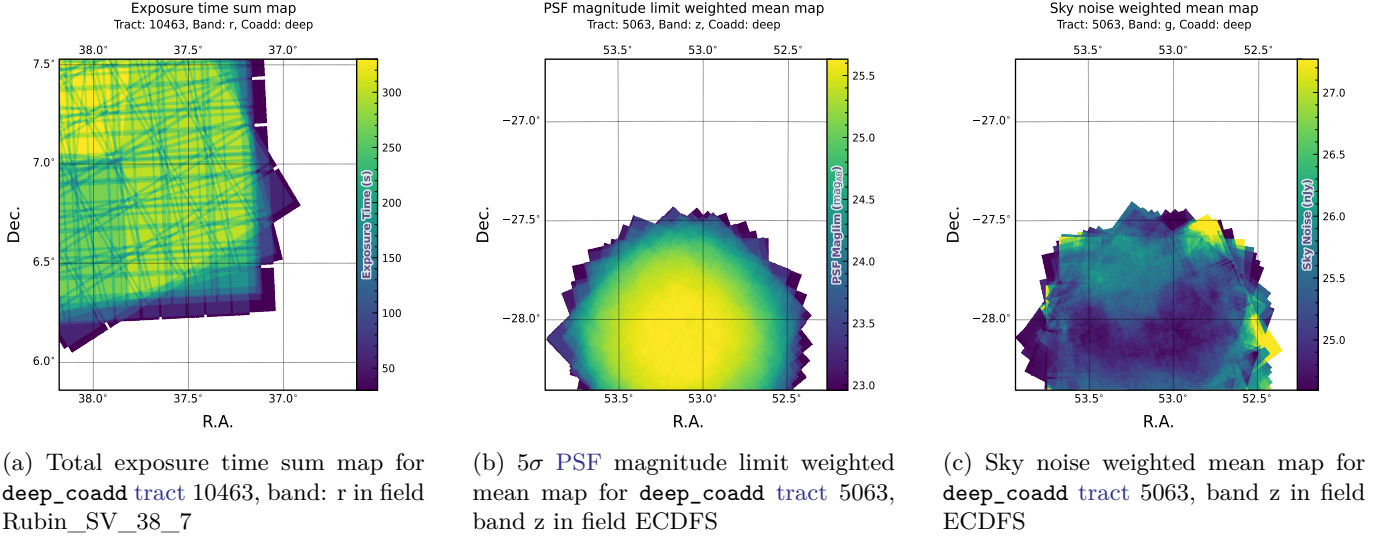


Figure 8. Examples of survey property maps from Rubin DP1 across different bands, clipped to the boundary of a single tract for visual clarity.

and cannot be accessed via the Data Butler (§6.2.2). All multi-band HiPS images are provided in PNG format.

3.4. Metadata

DP1 also includes metadata about the observations, which are stored in the Visit table. The data it contains was produced by the observatory directly, rather than the science pipelines. It contains technical data for each visit, such as telescope pointing, camera rotation, airmass, exposure start and end time, and total exposure time.

3.5. Ancillary Data Products

DP1 also includes several ancillary data products. While we do not expect most users to need these, we describe them here for completeness. All the Data Products described in this section can only be accessed via the Data Butler (§6.2.2).

3.5.1. Task configuration, log, and metadata

DP1 includes provenance-related data products such as task logs, configuration files, and task metadata. Configuration files record the parameters used in each processing task, while logs and metadata contain information output during processing. These products help users understand the processing setup and investigate potential processing failures.

3.5.2. Calibration Data Products

Calibration data products include a variety of images and models that are used to characterize and correct the performance of the camera and other system components. These include bias, dark, and flat-field images,

Photon Transfer Curve (PTC) gains, brighter-fatter kernels, charge transfer inefficiency (CTI) models, linearizers, and illumination corrections. For flat-field corrections, DP1 processing used combined flats, which are averaged from multiple individual flat-field exposures to provide a stable calibration. These calibration products are essential inputs to Instrument Signal Removal (ISR) (§4.2.1). While these products are included in DP1 for transparency and completeness, users should not need to rerun ISR for their science and are advised to start with the processed visit_image.

3.5.3. Standard Bandpasses

The standard_passband data products contain the system throughputs described in §2.2.1.

4. DATA RELEASE PROCESSING

Data Release Processing () is the systematic processing of all Rubin Observatory data collected up to a certain date to produce the calibrated images, catalogs of detections, and derived data products described in Section 3. DP1 was processed entirely at the United States Data Facility (USDF), using 17,024 CPU hours.⁷⁹

This section describes the pipeline algorithms used to produce DP1 and how they differ from those planned for full-scale LSST data releases. Data Release Production consists of four major stages: (1) single-frame processing, (2) calibration, (3) coaddition, and (4) difference imaging analysis (Difference Image Analysis ()).

⁷⁹ For future Data Releases, data processing will be distributed across the USDF, the French Data Facility (FrDF) and the United Kingdom Data Facility (UKDF).

4.1. LSST Science Pipelines Software

The LSST Science Pipelines software (Rubin Observatory Science Pipelines Developers 2025; J. Swinbank et al. 2020) will be used to generate all Rubin Observatory and LSST data products. It provides both the algorithms and middleware frameworks necessary to process raw data into science-ready products, enabling analysis by the Rubin scientific community. Version v29.1 of the pipelines was used to produce DP1. Documentation for this version is available at: https://pipelines.lsst.io/v/v29_1_1\protect\let\futurelet\@let@token\let\let\relax

4.2. Single Frame Processing

4.2.1. Instrument Signature Removal

The first step in processing LSSTComCam images is to correct for the effects introduced by the telescope and detector. Each sensor and its readout amplifiers can vary slightly in performance, causing images of even a uniformly illuminated focal plane to exhibit discontinuities and shifts due to detector effects. The ISR pipeline aims to recover the original astrophysical signal as best as possible and produce science-ready single-epoch images for source detection and measurement (see P. Fagrelis & E. Rykoff 2025; A. A. Plazas Malagón et al. 2025 for a detailed description of the ISR procedures).

Figure 9 illustrates the model of detector components and readout electronics and their impact on the signal, tracing the process from photons incident on the detector surface to the final quantized values⁸⁰ recorded in the image files. The ISR pipeline essentially “works backward” through the signal chain, correcting the integer analog-to-digital units (ADU) raw camera output back to a floating-point number of photoelectrons created in the silicon. The physical detector, shown on the left in Figure 9, is the source of effects that arise from the silicon itself, such as the dark current and the brighter-fatter effect (A. A. Plazas et al. 2018; A. Broughton et al. 2024). After the integration time has elapsed, the charge is shifted to the serial register and read out, which can introduce charge transfer inefficiencies and a clock-injected offset level. The signals for all amplifiers are transferred via cables to the Readout Electronics Board (REB), during which crosstalk between the amplifiers may occur. The Analog Signal Processing Integrated Circuit (ASIC) on the REB converts the analog signal from the detector into a digital signal, adding both quantization and a bias level to the image. Although

the signal chain is designed to be stable and linear, the presence of numerous sources of non-linearity indicates otherwise.

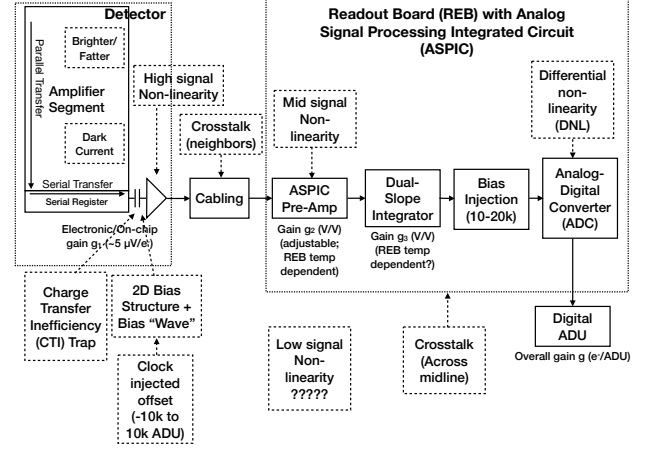


Figure 9. The model of the detector and REB components, labeled with the effects that they impart on signal.

The ISR processing pipeline for DP1 performs, in the following order: Analogue-to-Digital Unit (ADU) dithering to reduce quantization effects, serial overscan subtraction, saturation masking, gain normalization, crosstalk correction, parallel overscan subtraction, linearity correction, serial CTI correction, image assembly, bias subtraction, dark subtraction, brighter-fatter correction, defect masking and interpolation, variance plane construction, flat fielding, and amplifier offset (amp-offset) correction⁸¹. Flat fielding for DP1 was performed using combined flats produced from twilight flats acquired with sufficient rotational dithering to mitigate artifacts from print-through stars, as described in §2.3.

4.2.2. Background Subtraction

The background subtraction algorithms in the LSST Science Pipelines estimate and remove large-scale background signals from science imaging. Such signals may include sky brightness from airglow, moonlight, scattered light instrumental effects and diffuse astrophysical emission. In so doing, true astrophysical sources are isolated to allow for accurate detection and measurement.

To generate a background model, each post-ISR image is divided into superpixels of 128×128 pixels. Pixels with a mask flag set that indicates that they contain

⁸⁰ The images written to disk by the camera have values that are integers., which come from the ADC converting an analog voltage.

⁸¹ Amp-offset corrections are designed to address systematic discontinuities in background sky levels across amplifier boundaries. The implementation in the LSST Science Pipelines is based on the Pan-STARRS Pattern Continuity algorithm (C. Z. Waters et al. 2020).

no useful science data or that they contain [flux](#) from a preliminary source detection are masked. The iterative 3σ clipped mean of the remaining pixels is calculated for each superpixel, constructing a [background](#) statistics image. A sixth-order Chebyshev polynomial is fit to these values on the scale of a single detector to allow for an extrapolation back to the native pixel resolution of the post-[ISR](#) image.

4.3. Calibration

Stars are detected in each post-[ISR](#) image using a 5σ threshold. Detections of the same star across multiple images are then associated to identify a consistent set of isolated stars with repeated observations suitable for use in PSF modeling, photometric [calibration](#), and astrometric [calibration](#).

Initial astrometric and photometric solutions are derived using only the calibration reference catalogs (see §3.2), and an initial PSF model is fit using PSFEx (E. Bertin 2011). These preliminary solutions provide approximate source positions, fluxes, and PSF shapes that serve as essential inputs to the [calibration](#) process, enabling reliable source matching, selection of high-quality stars, and iterative refinement of the final astrometric, photometric, and PSF models. These preliminary solutions are subsequently replaced by more accurate fits, as described in the following sections.

4.3.1. PSF Modeling

PSF modeling in DP1 uses the Piff (M. Jarvis et al. 2021) package. Our configuration of Piff utilizes its `PixelGrid` model with a fourth-order polynomial interpolation per CCD, except in the u-band, where star counts are insufficient to support a fourth-order fit. In this case, a second-order polynomial is used instead. Details on the choice of polynomial order, overall PSF modeling performance, and known issues are discussed in §5.2.

4.3.2. Astrometric Calibration

Starting from the astrometric solution calculated in single frame processing (§4.2), the final astrometric solution is computed using the ensemble of visits in a given band that overlap a given [tract](#). This allows the astrometric solution to be further refined by using all of the isolated point sources of sufficient signal-to-noise ratio in an image, rather than only those that appear in the reference catalog, as is done in single frame processing. Using multiple whole visits rather than a single detector also allows us to account for effects that impact the full focal plane and for the proper motion and parallax of the sources.

In order to perform the fit of the astrometric solution, isolated point sources are associated between over-

lapping visits and with the Gaia [DR3](#) reference catalog where possible. The model used for DP1 consists of a static map from pixel-space to an intermediate frame (the per-detector model), followed by a per-visit map from the intermediate frame to the plane tangent to the telescope boresight (the per-visit model), then finally a deterministic mapping from the tangent plane to the sky. The fit is done using the `gbdes` package (G. M. Bernstein et al. 2017), and a full description is given in C. Saunders (2024).

The per-detector model is intended to capture quasi-static characteristics of the telescope and [camera](#). During [Rubin Operations](#), the astrometric solution will allow for separate epochs with different per-detector models, to account for changes in the camera due to warming and cooling and other discrete events. However, for DP1, LSSTComCam was assumed to be stable enough that all visits use the same per-detector model. The model itself is a separate two-dimensional polynomial for each detector. For DP1, a degree 4 polynomial was used; the degree of the polynomial mapping is tuned for each instrument and may be different for LSSTCam. Further improvements may be made by including a pixel-based astrometric offset mapping, which would be fit from the ensemble of astrometric residuals, but this is not included in the DP1 processing.

The per-visit model attempts to account for time-varying effects on the path of a photon from both atmospheric sources and those dependent on the telescope orientation. This model is also a polynomial mapping, in this case a degree 6 two-dimensional polynomial. Correction for DCR (§5.7) was not done for DP1, but will be included in LSSTCam processing during [Rubin Operations](#). Future processing will also likely include a Gaussian Process fit to better account for atmospheric turbulence, as was demonstrated by W. F. Fortino et al. (2021) and P. F. Léget et al. (2021).

The final component of the astrometric [calibration](#) involves the positions of the isolated point sources included in the fit, which are described by five parameters: sky coordinates, proper motion, and parallax. While proper motions and parallaxes are not released for DP1, they are fitted for these sources in the astrometric solution to improve the astrometric calibration.

4.3.3. Photometric Calibration

Photometric [calibration](#) of the DP1 dataset is based on the [Forward Global Calibration Model](#) (FGCM) (FGCM D. L. Burke et al. 2018), adapted for the LSST Science Pipelines (H. Aihara et al. 2022; P. Fagrelus & E. Rykoff 2025). We used the FGCM to calibrate the full DP1 dataset with a forward model that uses a pa-

parameterized model of the atmosphere as a function of airmass along with a model of the instrument throughput as a function of wavelength. The FGCM process typically begins with measurements of the instrumental throughput, including the mirrors, filters, and detectors. However, because full scans of the LSSTComCam as-built filters and individual detectors were not available, we instead used the nominal reference throughputs for the Simonyi Survey Telescope and LSSTCam.⁸² These nominal throughputs were sufficient for the DP1 calibration, given the small and homogeneous focal plane consisting of only 9 ITL detectors. The FGCM atmosphere model, provided by MODTRAN (A. Berk et al. 1999), was used to generate a look-up table for atmospheric throughput as a function of zenith distance at Cerro Pachón. This model accounts for Rayleigh scattering by molecular oxygen (O₂) and ozone (O₃), absorption by water vapor, and Mie scattering by airborne aerosol particulates. Nightly variations in the atmosphere are modeled by minimizing the variance in repeated observations of stars with a Signal to Noise Ratio (SNR) greater than 10, measured using “compensated aperture fluxes”. These fluxes include a local background subtraction (see §4.2.2) to mitigate the impact of background offsets. The model fitting process incorporates all 6 bands (*ugrizy*) but does not include any gray (achromatic) terms, except for a linear assumption of mirror reflectance degradation, which is minimal over the short duration of the DP1 observation campaign. As an additional constraint on the fit, we use a subset of stars from the reference catalog (P. Ferguson et al. 2025), primarily to constrain the system’s overall throughput and establish the “absolute” calibration.

4.4. Visit Images and Source Catalogs

With the final PSF models, WCS solutions, and photometric calibrations in place, we reprocess each single-epoch image to produce a final set of calibrated visit images and source catalogs. Source detection is performed down to a 5σ threshold using the updated PSF models, followed by measurement of PSF and aperture fluxes. These catalogs represent the best single-epoch source characterization, but they are not intended for constructing light curves. For time-domain analysis, we recommend using the forced photometry tables described in §4.6.2.

⁸² Available at: <https://github.com/lsst/throughputs/tree/1.9>

4.5. Coaddition Processing

4.5.1. Coaddition

Only exposures with a *seeing* better than 1.7 arcseconds FWHM are included in the deep coadded images. For the template coadds, typically only the top third of visits with the best *seeing* are used (although see §3.1 for more details), resulting in an even tighter image quality cutoff for the template coadds. Exposures with poor PSF model quality, identified using internal diagnostics, are excluded to prevent contamination of the coadds with unreliable PSF estimates. The remaining exposures are combined using an inverse-variance weighted mean stacking algorithm.

To mitigate transient artifacts before coaddition, we apply the artifact rejection procedure described in Y. Al-Sayyad (2019) that identifies and masks features such as satellite trails, optical ghosts, and cosmic rays. It operates on a time series of PSF-matched images resampled onto a common pixel grid (“warps”) and leverages their temporal behavior to distinguish persistent astrophysical sources from transient artifacts.

Artifact rejection uses both direct (where no PSF-matching is performed) and PSF-matched warps, homogenized to a standard PSF of 1.8 arcseconds FWHM, broadly consistent with the 1.7 arcsecond FWHM *seeing* threshold used in data screening. A sigma-clipped mean of the PSF-matched warps serves as a static sky model, against which individual warps are differenced to identify significant positive and negative residuals. Candidate artifact regions are classified as *transient* if they appear in less than a small percentage of the total number of exposures, with the threshold based on the number of visits, N , as follows:

- $N = 1$ or 2 : threshold = 0 (no clipping).
- $N = 3$ or 4 : threshold = 1.
- $N = 5$: threshold = 2.
- $N > 5$: threshold = $2 + 0.03N$.

Identified *transient* regions are masked before coaddition, improving image quality and reducing contamination in derived catalogs.

4.5.2. Coadd Processing

Coadd-processing consists of detection, *deblending*, and measurement on coadds to produce object tables (§3.2). For each coadd in all six bands, we perform source detection at a 5σ detection threshold and then adjust the background with a per-patch constant (coadds are built from background-subtracted images, but the deeper detection on coadds redefines what is

considered source vs. background). Detections across bands are merged in a fixed priority order, *irzygu*, to form a union detection catalog, which serves as input to deblending.

Deblending is performed using the Scarlet Lite algorithm, which implements the same model as Scarlet (P. Melchior et al. 2018), but operates on a single pixel grid. This allows the use of analytic gradients, resulting in greater computational speed and memory efficiency.

Source measurement is then performed on the deblended detection footprints in each band. Measurements are conducted in three modes: independent per-band measurements, forced measurements in each band, and multiband measurements. Most measurement algorithms operate through a single-band plugin system, largely as originally described in J. Bosch et al. (2018). These plugins run on a deblended image, which is generated by using the Scarlet model as a template to reweight the original noisy coadded pixel values. This effectively preserves the original image in regions where objects are not blended, while dampening the noise elsewhere.

Measurement algorithm outputs include object fluxes, centroids, and higher-order moments thereof such as sizes and shapes. A reference band is then selected for each object based on detection significance and measurement quality following the same priority order as detection merging (*irzygu*). A second round of measurements is performed in forced mode using the shape and position from the reference band to ensure consistent colors (J. Bosch et al. 2018). A variety of flux measurements are included in the object tables, from aperture fluxes and forward modeling algorithms.

Composite model (CModel) magnitudes (K. Abazajian et al. 2004; J. Bosch et al. 2018) are used to calculate the extendedness parameter, which functions as a star-galaxy classifier. Gaussian-aperture-and-PSF (GAAP K. Kuijken 2008; A. Kannawadi 2022) fluxes are provided to ensure consistent galaxy colors across bands. Sersic model (J. L. Sérsic 1963; J. L. Sérsic 1968) fits are run on all available bands simultaneously (MultiProFit, D. S. Taranu 2025). The resulting Sersic model fluxes are provided as an alternative to CModel and are intended to represent total galaxy fluxes. Like CModel, the Sersic model is a Gaussian mixture approximation to a true Sersic profile, convolved with a Gaussian mixture approximation to the PSF. CModel measurements use a double “shapelet” (A. Refregier 2003) PSF with a single shared shape, while the Sersic fits use a double Gaussian with independent shape parameters for each component. Sersic model fits also include a free centroid, with all other structural parameters shared across all

bands. That is, the intrinsic model has no color gradients, but the convolved model may have color gradients if the PSF parameters vary significantly between bands.

Further details on the performance of these algorithms can be in §5.6.

4.6. Variability Measurement

4.6.1. Difference Imaging Analysis

Difference Image Analysis (DIA) uses the decorrelated Alard & Lupton image differencing algorithm (D. J. Reiss & R. H. Lupton 2016). We detected both positive and negative DIASources at 5σ in the difference image. Sources with footprints containing both positive and negative peaks due to offsets from the template position or blending were fit with a dipole centroid code.

We filter a subset of DIASources that have pixel flags characteristic of artifacts, non-astrophysical trail lengths, and unphysically negative direct fluxes. We performed a simple spatial association of DIASources into DIAObjects with a one arcsecond matching radius.

The Machine Learning reliability model applied to DP1 was developed with the aim to meet the latency requirements for Rubin Alert Production when executed on CPUs. Accordingly we developed a relatively simple model: a Convolutional Neural Network with three convolutional layers, and two fully connected layers. The convolutional layers have a 5×5 kernel size, with 16, 32, and 64 filters, respectively. A max-pooling layer of size 2 is applied at the end of each convolutional layer, followed by a dropout layer of 0.4 to reduce overfitting. The last fully connected layers have sizes of 32 and 1. The ReLU activation function is used for the convolutional layers and the first fully connected layer, while a sigmoid function is used for the output layer to provide a probabilistic interpretation. The cutouts are generated by extracting postage stamps of 51×51 pixels centered on the detected source. The input data of the model consist of the template, science, and difference image stacked to have an array of shape (3, 51, 51). The model is implemented using PyTorch (J. Ansel et al. 2024). The Binary Cross Entropy loss function was used, along with the Adaptive Moment Estimation (Adam) optimizer with a fixed learning rate of 1×10^{-4} , weight decay of 3.6×10^{-2} , and a batch size of 128. The final model uses the weights that achieved the best precision/purity for the test set. Training was done on the SLAC National Accelerator Laboratory () Shared Scientific Data Facility () with an NVIDIA model L40S GPU.

The model was initially trained using simulated data from the second Dark Energy Science Collaboration () Data Challenge (DC2; (LSST Dark Energy Science Collaboration (LSST DESC) et al. 2021)) plus randomly lo-

cated injections of PSFs to increase the number of real sources, for a total of 89,066 real sources. The same number of bogus sources were selected at random from non-injected DIASources. Once the LSSTComCam data were available, the model was fine-tuned on a subset of the data containing 183,046 sources with PSF injections. On the LSSTComCam test set, the model achieved an accuracy of 98.06%, purity of 97.87%, and completeness of 98.27%. As discussed in §5.8, the injections used to train this model version do not capture all types of astrophysical variability, so performance on the test set will not be representative for variable stars, comets, etc.

4.6.2. Light Curves

To produce light curves, we perform multi-epoch forced photometry on both the direct visit images and the difference images. For light curves we recommend the forced photometry on the difference images (psDiffFlux on the ForcedSource Table), as it isolates the variable component of the flux and avoids contamination from static sources. In contrast, forced photometry on direct images includes flux from nearby or blended static objects, and this contamination can vary with seeing. Centroids used in the multi-epoch forced photometry stage are taken either from object positions measured on the coadds or from the DIAObjects (the associated DIASources detected on difference images).

4.6.3. Solar System Processing

Solar system processing in DP1 consists of two key components: the association of observations (sources) with known solar system objects, and the discovery of previously unknown objects by linking sets of tracklets⁸³.

To generate expected positions, ephemerides are computed for all objects found in the Minor Planet Center orbit catalog using the SORCHA survey simulation toolkit (Merritt et al., in press)⁸⁴. To enable fast lookup of objects potentially present in an observed visit, we use the mpsky package (M. Juric 2025). In each image, the closest DiaSource within 1 arcsecond of a known solar system object’s predicted position is associated to that object.

Solar system discovery uses the heliolinx package of asteroid identification and linking tools (A. Heinze et al. 2023). The suite consists of the following tasks:

- Tracklet creation with `make_tracklets`
- Multi-night tracklet linking with `heliolinc`

- Linkage post processing (orbit fitting, outlier rejection, and de-duplication) with `link_purify`

The inputs to the heliolinx suite included all sources detected in difference images produced by an early processing of the LSSTComCam commissioning data, including some that were later rejected as part of DP1 processing and hence are not part of DP1.

About 10% of all commissioning visits targeted the near-ecliptic field Rubin_SV_38_7 chosen to facilitate asteroid discovery. Rubin_SV_38_7 produced the vast majority of asteroid discoveries in DP1, as expected, but a few were found in off-ecliptic fields as well.

Tracklet creation with `make_tracklets` used an upper limit angular velocity of 1.5 deg/day, faster than any main belt asteroid and in the range of many Near-Earth Object () discoveries. To minimize false tracklets from fields observed multiple times per night, the minimum tracklet length was set to three detections, and a minimum on-sky motion of five arcseconds was required for a valid tracklet.

The heart of the discovery pipeline is the heliolinc task, which connects (“links”) tracklets belonging to the same object over a series of nights. It employs the HelioLinC3D algorithm (S. Eggl et al. 2020; A. Heinze et al. 2022), a refinement of the original HelioLinC algorithm of M. J. Holman et al. (2018). The heliolinc run tested each tracklet with 324 different hypotheses spanning heliocentric distances from 1.5 to 9.8 astronomical unit (au) and radial velocities spanning the full range of possible bound orbits (eccentricity 0.0 to nearly 1.0). This range of distance encompasses all main belt asteroids and Jupiter Trojans, as well as many comets and Mars-crossers and some NEOs. Smaller heliocentric distances were not attempted here because nearby objects move rapidly across the sky and hence were not likely to remain long enough in an LSSTComCam field to be discovered. A clustering radius was chosen corresponding to 1.33×10^{-3} au at 1 au from Earth. Linkages produced by heliolinc are then post-processed with `link_purify` into a final non-overlapping set of candidate discoveries, ranked from highest to lowest probability of being a real asteroid based on astrometric orbit-fit residuals and other considerations.

5. PERFORMANCE CHARACTERIZATION AND KNOWN ISSUES

In this section, we provide an assessment of the DP1 data quality and known issues. A summary of the Rubin DP1 key numbers and data quality metrics is found in PERFSUMMARYTABLE

⁸³ A tracklet is defined as two or more observations taken in close succession in a single night.

⁸⁴ Available at <https://github.com/dirac-institute/sorcha>

5.1. Sensor Anomalies and ISR

In addition to the known detector features identified before LSSTComCam commissioning, most of which are handled by the ISR processing (see §4.2.1), we discovered a number of new types of anomalies in the DP1 data. Since no corrections are currently available for these anomalies, they are masked and excluded from downstream data products.

5.1.1. Vampire Pixels

Vampire pixels are visible on the images as a bright defect surrounded by a region of depressed flux, as though the defect is stealing charge from its neighboring pixels; they have been termed “vampire” defects. Figure ?? shows an example of a vampire pixel near the center of R22_S11 on an r-band flat.

From studies on evenly illuminated images, vampires appear to conserve charge. Unfortunately, there’s no clean way to redistribute this stolen flux, and so we have identified as many of them as possible and created manual defect masks to exclude them from processing. We have found some similar features on the ITL detectors on LSSTCam, and will use the same approach to exclude them.

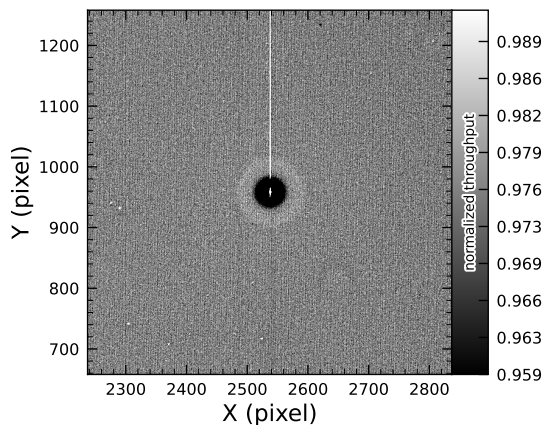


Figure 10. A large *vampire pixel* near the center of R22_S11, as seen on the r-band flat.

5.1.2. Phosphorescence

Some regions were seen to contain large numbers of bright defects. An example is shown in Figure ?? in a g-band flat. On closer study, it appears that on some detectors a layer of photoresist wax was incompletely removed from the detector surface during production. As this wax is now trapped below the surface coatings, there is no way to physically clean these surfaces. If this

wax responded to all wavelengths equally, then it would likely result in quantum efficiency dips, which might be removable during flat correction. However, it appears that this wax is slightly phosphorescent, with a decay time on the order of minutes, resulting in the brightness of these sources being dependent on the illumination of prior exposures. The worst of these regions were excluded with manual masks, but we do not expect to need to do this for LSSTCam.

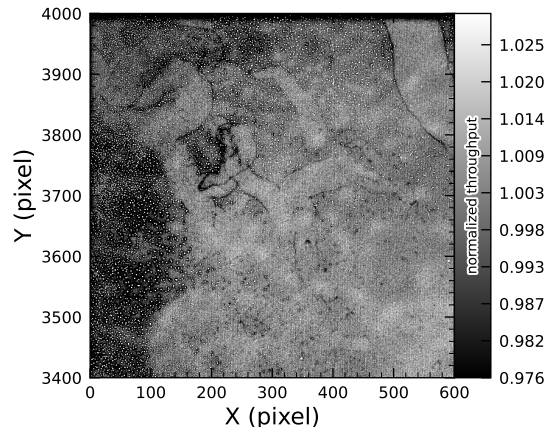


Figure 11. The top left corner of R22_S01 in the g-band flat, showing the many small defect features that are caused by the remnant photoresist wax. A single large defect box masks this region from further analysis to prevent these features from contaminating measurements.

5.1.3. Crosstalk

We use an average crosstalk correction based on laboratory measurements with LSSTCam. These average corrections performed better than expected, and so have been used as-is for DP1 processing. There are, however, some residual crosstalk features present post-correction, with a tendency towards over-subtraction. Figure ?? shows an example of a bright star with over-subtracted crosstalk residuals visible on neighboring amplifiers to both sides on exposure 2024120600239, detector R22_S02.

5.1.4. Bleed Trails

Bleed trails from saturated sources were expected on LSSTComCam, but they appear in more dramatic forms than was expected. As a bleed trail nears the serial register, it fans out into a “trumpet” shaped feature. Although bright, these features do not have consistently saturated pixels. In DP1 these “edge bleeds” were programmatically identified and masked.

Saturated sources can create a second type of bleed, where the central bleed drops below the background

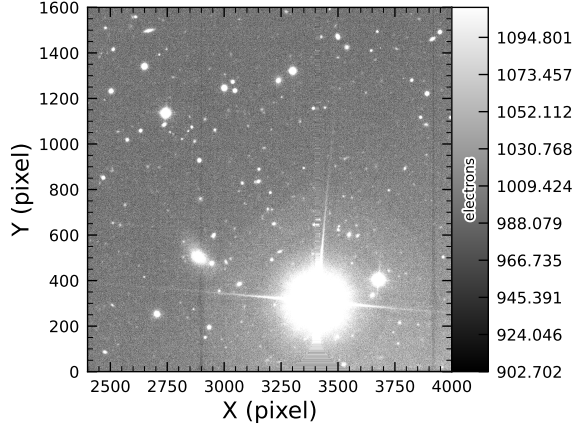


Figure 12. An example of a bright star with over-subtracted crosstalk residuals visible on neighboring amplifiers to both sides (exposure 2024120600239, detector R22_S02). The horizontal banding stretching from the center of the star shows the interpolation pattern covering the saturated core and the ITL edge bleed near the serial register.

level. The depressed columns along these trails extend across the entire height of the detector, crossing the detector mid-line. We developed a model for these to identify which sources are sufficiently saturated to result in such a trail, which is then masked. As these kind of trails appear only on the ITL detectors, we’ve named these features “ITL dips.” Figure ?? shows an example of a bright star exhibiting the “ITL dip” phenomenon on exposure: 2024121000503, detector: R22_S21.

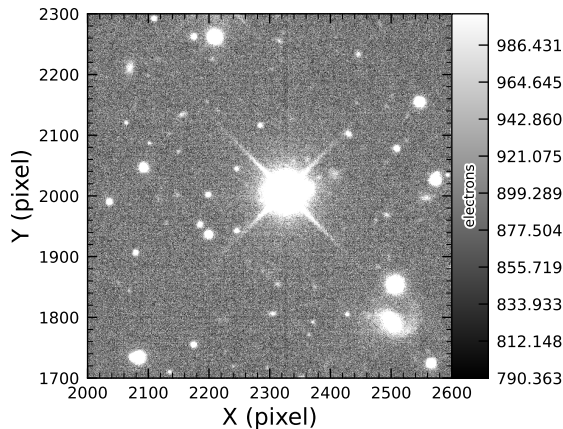


Figure 13. A bright star showing the “ITL dip” phenomenon, in which a dark trail extends out from the star to the top and bottom edges of the detector (exposure: 2024121000503, detector: R22_S21).

Table 5. Comparison of observed and model residuals, across all visits and filters.

Quantity	Observed	Piff O2	Piff O4
		$\times 10^{-4}$	$\times 10^{-4}$
$\langle T \rangle$ (pixel ²)	11.366 ± 0.003		
$\langle e^1 \rangle$	$(-6.07 \pm 0.05) \times 10^{-3}$		
$\langle e^2 \rangle$	$(-4.57 \pm 0.05) \times 10^{-3}$		
$\langle e \rangle$	$(8.794 \pm 0.004) \times 10^{-2}$		
$\langle \delta T/T \rangle$		-4.0 ± 0.2	-5.0 ± 0.2
$\langle \delta e^1 \rangle$		0.6 ± 0.1	0.5 ± 0.1
$\langle \delta e^2 \rangle$		0.0 ± 0.1	0.0 ± 0.1

5.2. PSF Models

To characterize PSF performance, we use adaptive second moments (G. M. Bernstein & M. Jarvis 2002) measured on PSF stars and on the PSF model using the HSM implementation (C. Hirata & U. Seljak 2003 and R. Mandelbaum et al. 2005), all expressed in each detector’s pixel frame. We consider the classical trace of the second moment matrix T , along with the ellipticity parameters e^1 and e^2 , to characterize the performance of the PSF. We denote T_{PSF} , e_{PSF}^1 , and e_{PSF}^2 for measurements on the PSF stars, and T_{model} , e_{model}^1 , and e_{model}^2 for the PSF model. Two variants are compared:

- Piff with second-order polynomial interpolation (default in science pipelines); and
- Piff with fourth-order polynomial interpolation (final DP1 PSF).

Table 5 summarizes each model’s ability to reconstruct the mean T , e^1 , and e^2 on LSSTComCam. Piff shows a negative residual bias in size.

Another way to assess PSF performance is to examine the average across visits of $\delta T/T$ projected onto focal-plane coordinates (Figure 14). Piff shows strong spatial correlations, with a systematic offset that matches Table 5. It is the existence of these spatial structures that motivated raising the interpolation order to four, except in the u-band. Although not shown in Figure 14, third-order polynomial interpolation still exhibited residual structure. A fifth-order polynomial interpolation would require more stars than are available on some CCDs to adequately constrain the model while offering only marginal gains. Preliminary analysis of LSSTCam data in the laboratory at SLAC shows that the ITL sensors exhibit the same pattern as ITL sensors on LSSTComCam. The sensor’s $\delta T/T$ is fully correlated with the height variation across the LSSTCam ITL sensors,

which explains this behavior. Future data processing will account for this height variation directly in the PSF model.

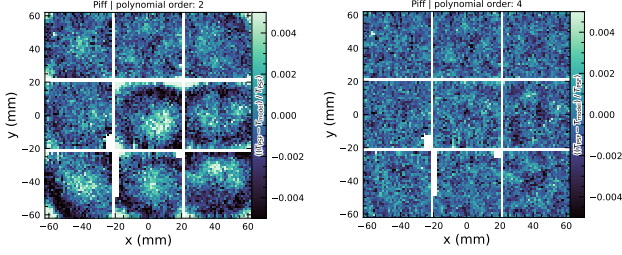


Figure 14. Average across all visits of $\delta T/T$ for different PSF modeling on LSSTComCam. Average is computed on a bin size of 120 pixels.

Another way to look at the PSF modeling quality is via whisker plots of the PSF second and fourth moments and their modeling residuals projected on a part of the sky. In addition to the second moment, the spin-2 fourth moments, $e^{(4)}$, are defined as:

$$e_1^{(4)} = M_{40} - M_{04}$$

$$e_2^{(4)} = 2(M_{31} - M_{13}),$$

where M_{pq} are the standardized higher moments as defined in T. Zhang et al. (2023) measured on stars and PSF models. Figure 15 shows the whisker plots of e , $e^{(4)}$ (top rows), and δe , $\delta e^{(4)}$ in the ECDFS field. The direction of the whiskers represents the orientation of the shape, while the length, modulated by the red bar, represents the amplitude $|e|$ or $|e^{(4)}|$. We observe coherent patterns in both the PSF moments and the residuals, the latter of which warrants further investigation if it persists in future data releases.

Another characterization of PSF-modeling performance is to look at $\delta T/T$ versus stellar magnitude to reveal any PSF size-flux dependencies (Figure 16). We also repeat this analysis in color bins to probe chromatic effects. Fainter stars show a larger negative bias in PSF size compared to brighter ones. Binning by color uncovers a clear color dependence, as seen in DES (e.g., M. Jarvis et al. 2021). DP1 does not include the color correction implemented in T. Schutt et al. (2025). Post-DP1 tests added a color correction similar to T. Schutt et al. (2025): it reduced the color-dependent scatter in PSF size but did not eliminate the negative bias for faint sources. The cause of this residual remains unknown and is consistent with what is shown in Table 5.

As noted in Rubin Observatory Science Pipelines Developers (2025), two key Piff features were not used in the DP1 processing. PSF color dependence wasn't implemented, and, while Rubin software allows Piff to work

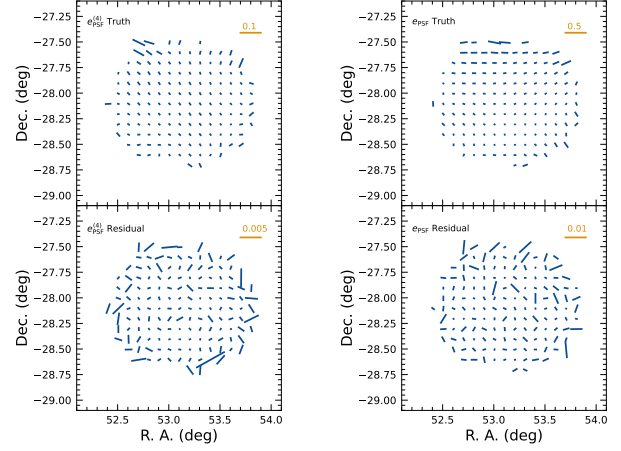


Figure 15. Whisker plot on ECDFS field for e , $e^{(4)}$ and δe , $\delta e^{(4)}$.

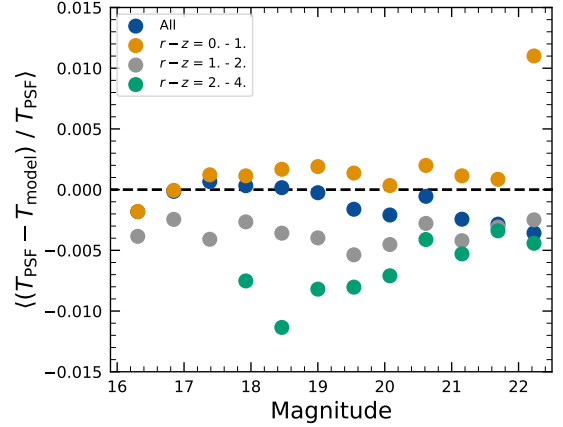


Figure 16. Binned $\delta T/T$ as a function of magnitude across all visits and filters and binned in different colors.

with sky coordinates (including WCS transformations), it doesn't yet correct for sensor-induced astrometric distortions such as tree rings. Both features are planned for upcoming releases.

5.3. Astrometry

To characterize astrometric performance, we evaluate both internal consistency and agreement with an external reference. A primary measure of internal consistency is the repeatability of position measurements for the same object. We associate isolated point sources across visits and compute the Root-Mean-Square (RMS) of their fitted positions. Figure 17 shows the median per-tract astrometric error for all isolated point sources, both after the initial calibration and after the final calibration, which includes proper motion corrections. The results indicate that the astrometric solution is already

very good after the initial calibration. Global calibration yields only modest improvement, likely due to the short time span of DP1 and the minimal distortions in the LSSTComCam. In the main survey, the longer time baseline and greater distortions near the LSSTCam field edges will make global calibration more impactful.

An additional metric of internal consistency is the repeatability of separations between objects at a given distance. To calculate this, we find pairs of objects at a given distance from each other, then calculate their separation in each visit in which they appear. The scatter in these distances then gives us a measure of the internal consistency of the astrometric model. The median value for each tract for objects separated by approximately 5 arcmin after the final calibration, i.e., AM1 from Ž. Ivezić & The LSST Science Collaboration (2018), is given in Figure 17. These values are already approaching the design requirement of 10 mas.

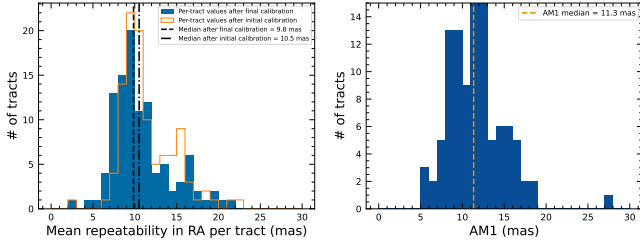


Figure 17. (a) Mean per-tract astrometric repeatability of measurements of isolated point sources in Rapid Analysis (RA) (b) Median per-tract repeatability in separations between isolated point sources 5 arcmin apart.

Finally, we consider the median separation between sources not included in the astrometric fit and associated objects from a reference catalog. For this, we use the Gaia DR3 catalog, with the object positions shifted to the observation epoch using the Gaia proper motion parameters. Figure 18 shows the median separation for each visit in the r-band in tract 4849.

The calculated values are almost all within 5 mas, well below the design requirement of 50 mas for the main survey.

By looking at the astrometric residuals, we can assess whether there are distortions not accounted for by the astrometric model. In some cases, the residuals in a single visit show behavior consistent with atmospheric turbulence, as shown in Figure 19. As in P. F. Léget et al. (2021) and W. F. Fortino et al. (2021), this is characterized by a curl-free gradient field in the two-point correlation function of the residuals (E-mode). However, as seen in Figure 20, the residuals in many visits also have correlation functions with a non-negligible divergence free B-mode, indicating that some of the remain-

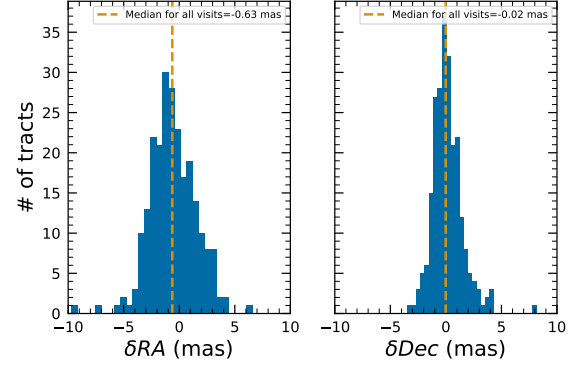


Figure 18. Median absolute offset for all visits in r-band in tract 4849. The offset is the difference between the position of isolated point sources that were reserved from the astrometric fit and matched objects from the Gaia DR3 catalog.

ing residuals are due to unmodeled instrumental effects, such as rotations between visits.

We can see unmodeled camera distortions by stacking the residuals over many visits as a function of the focal plane position. Figure 21 shows the median residuals in x and y directions for 1792 visits. Spatial structures are evident at the CCD level, along with the mid-line break in the y-direction residuals.

Further stacking all the detectors makes certain effects particularly clear. Figure 22 shows distortions very similar to those measured for an LSSTCam ITL sensor in a laboratory setting in J. H. Esteves et al. (2023).

5.4. Photometry

The photometric repeatability for isolated bright stars after the FGCM fits was excellent. Across a broad range of colors, including chromatic corrections, the repeatability for the 10% of stars reserved from the fit (signal-to-noise > 100) was 7.1/5.4/5.4/5.1/5.9/6.5 *mmag* for *ugrizy* respectively across all the fields. Taking into account the photometric noise, the intrinsic repeatability was approximately 4.8/2.7/1.7/1.0/2.0/1.1 *mmag* for *ugrizy* stars. Our pipeline does not yet include chromatic corrections in the final photometry. In this case the delivered photometric repeatability was 3 – 8 *mmag* for grizy.

In Figure 23, we show the stellar loci for *ugriz* from the full DP1 object table. The narrow widths of these stellar loci show that our photometric performance is where we expect it to be given the nature of the LSST-ComCam system.

5.5. Detection Completeness on Coadds

We characterize completeness by injecting synthetic sources into coadded images, and by comparing to ex-

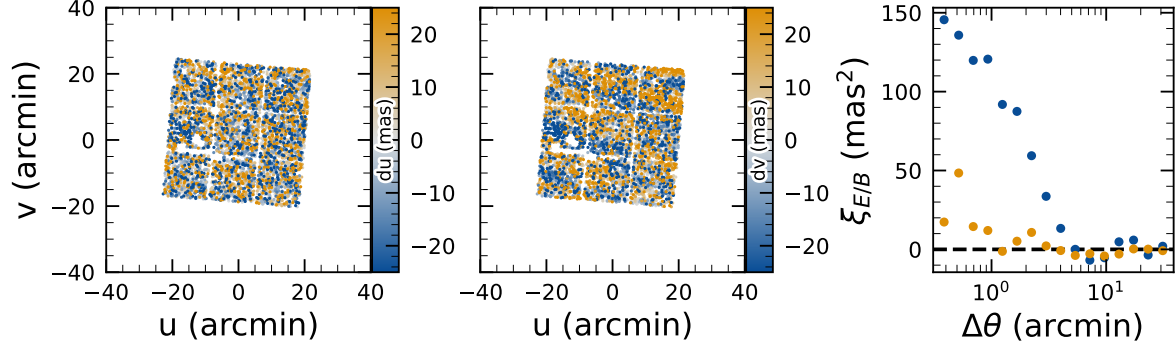


Figure 19. Residuals in du (left panel) and dv (center panel) directions, with the E and Byte (8 bit) (B)-modes of the two-point correlation function (right panel). The residuals show a wave-like pattern characteristic of atmospheric turbulence, and there is significant E-mode and negligible B-mode in the correlation function.

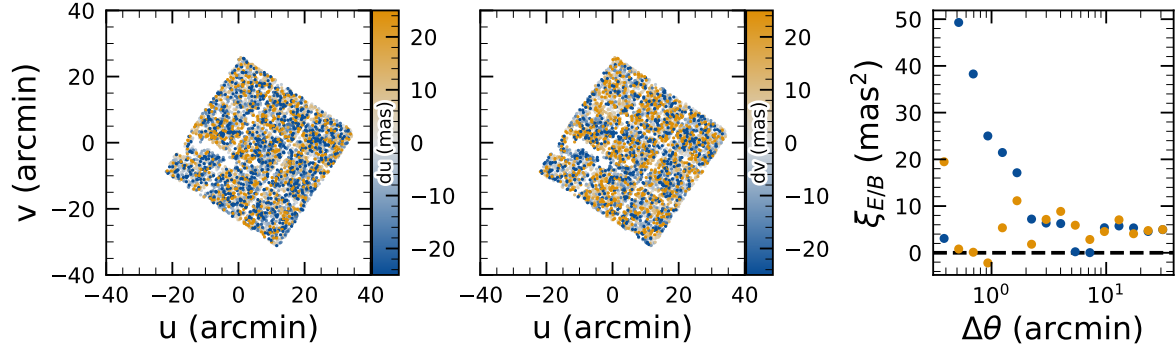


Figure 20. Residuals in du (left panel) and dv (center panel) directions, with the E and B-modes of the two-point correlation function (right panel). There are coherent residuals, but without the wave-like pattern seen in Figure 19, and the correlation function has significant values for both E and B-modes.

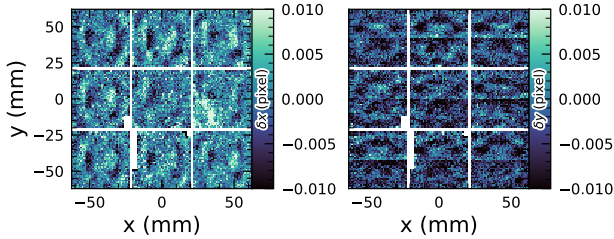


Figure 21. Median residuals as a function of focal plane position in dx (left panel) and dy (right panel) directions


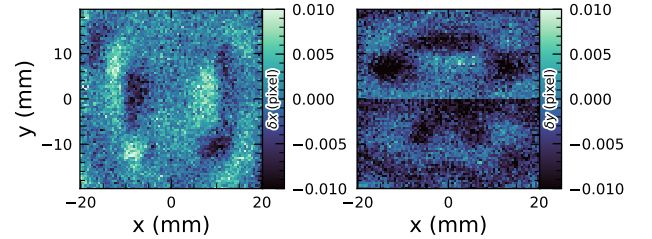


Figure 22. Median residuals as a function of pixel position in dx (left panel) and dy (right panel) directions

ternal catalogs. In both cases, we use a greedy, probabilistic matching algorithm, whereby reference objects are matched in order of descending brightness to the most likely target within a $0.5''$ radius.

We inject sources in 12 of the patches of the ECDFS region with the deepest coverage. The input catalog contains stars and galaxies from part of the Data Challenge 2 (DESC) (DESC) simulations (LSST Dark Energy Sci-

ence Collaboration (LSST DESC) et al. 2021), where the galaxies consist of an exponential disk and de Vaucouleurs (G. de Vaucouleurs 1948, 1953) bulge. To avoid deblender failures from excessive increases in object density, stars whose total flux (i.e., summed across all six bands) is brighter than 17.5 mag_{AB} are excluded, as are galaxies whose total flux is brighter than 15 mag_{AB} or

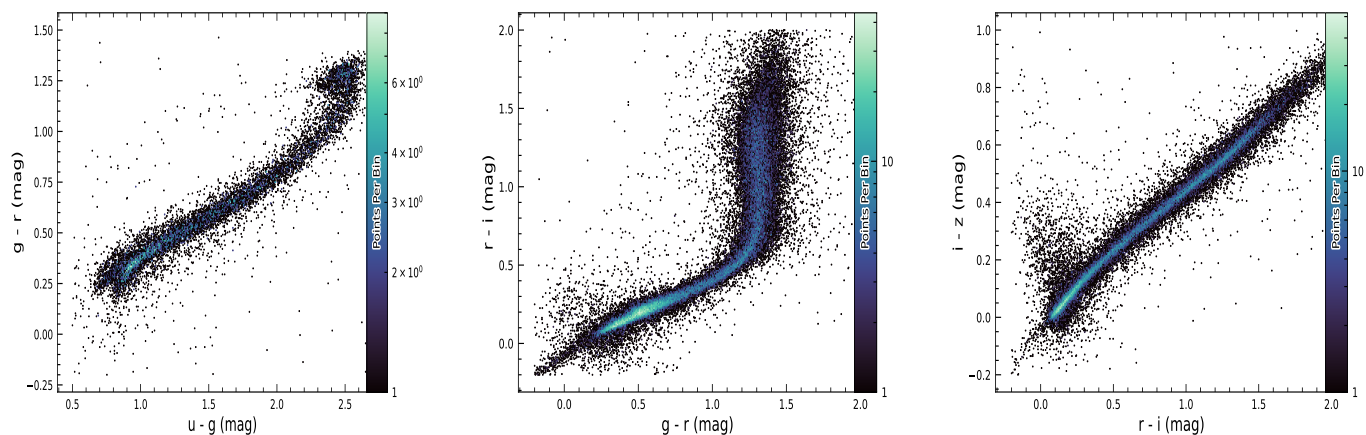

(a) *ugr* stellar locus containing 12779 stars with signal-to-noise greater than 50 in the *u* band.

(b) *gri* stellar locus containing 63236 stars with signal-to-noise greater than 200 in the *i* band.

(c) *riz* stellar locus containing 46760 stars with signal-to-noise greater than 200 in the *i* band.

Figure 23. Examples of stellar loci from the full DP1 data set.

fainter than 26.5 mag_{AB}. Half of the remaining objects are selected for injection.

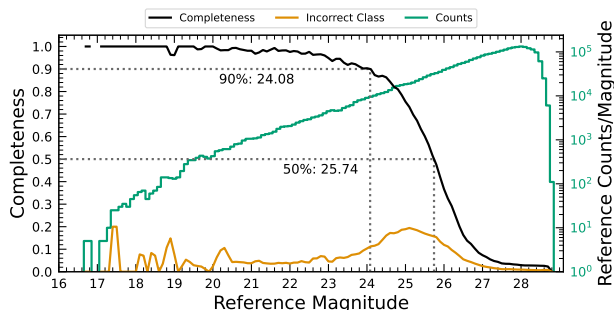


Figure 24. Completeness as a function of *i*-band CModel magnitude for DC2-based injections into a portion of the ECDFS field.

Figure 24 shows completeness as a function of magnitude for these injected objects. The completeness estimates are comparable to results from matching external catalogs. The Hubble Legacy Field catalog (K. E. Whitaker et al. 2019; G. Illingworth et al. 2016) reaches 50% completeness at 26.13 mag_{F775W}, approximately 0.4 magnitudes fainter; this is roughly equivalent to 25.83 mag_i from differences in matched object magnitudes. Similarly, completeness drops below 90% at 23.80 mag_{VIS} matching to Euclid Q1 (Euclid Collaboration et al. 2025) objects, equivalent to about 23.5 mag_i. The Euclid imaging is of comparable or shallower depth, so magnitude limits at lower completeness percentages than 90% are unreliable, whereas the HST images cover too small and irregular an area to accurately characterize 80-90% completeness limits.

At the 80% completeness limit, nearly 20% of objects, primarily injected galaxies, are incorrectly classified as stars based on extendedness, which indicates whether a source is more likely to be a point source or an extended source. Similarly, the fraction of correctly classified injected stars drops to about 50% at 23.8 mag_i (90% completeness).

There are several caveats for this analysis. The selection of objects for matching in any catalog is not trivial. Some fraction of the detections are either artifacts (particularly close to diffraction spikes around bright stars) or otherwise spurious. Additionally, some objects lie in masked regions of one survey but not another, which has not been accounted for. For injected source matching, the reference catalog does not include real on-sky objects. For this reason, we do not quote specific figures for purity; however, based on prior analyses of the DC2 simulations, purity is generally higher than completeness at any given magnitude.

5.6. Flux Measurement

Figure 25 shows *i*-band magnitude residuals for CModel and Sersic measurements using the matched injected galaxies described in §5.5. Similar behavior is seen in other bands. Sersic fluxes show reduced scatter and are more accurate on average for galaxies brighter than 22.5 mag_i, though CModel's are less biased, with median residuals slightly closer to zero. For fainter objects, Sersic fluxes are more biased and less accurate. The magnitude of this bias is considerably larger than previously seen in simulated data and is being investigated. Aperture fluxes - including Kron and Gaussian Aperture and PSF () - are not shown as they are not

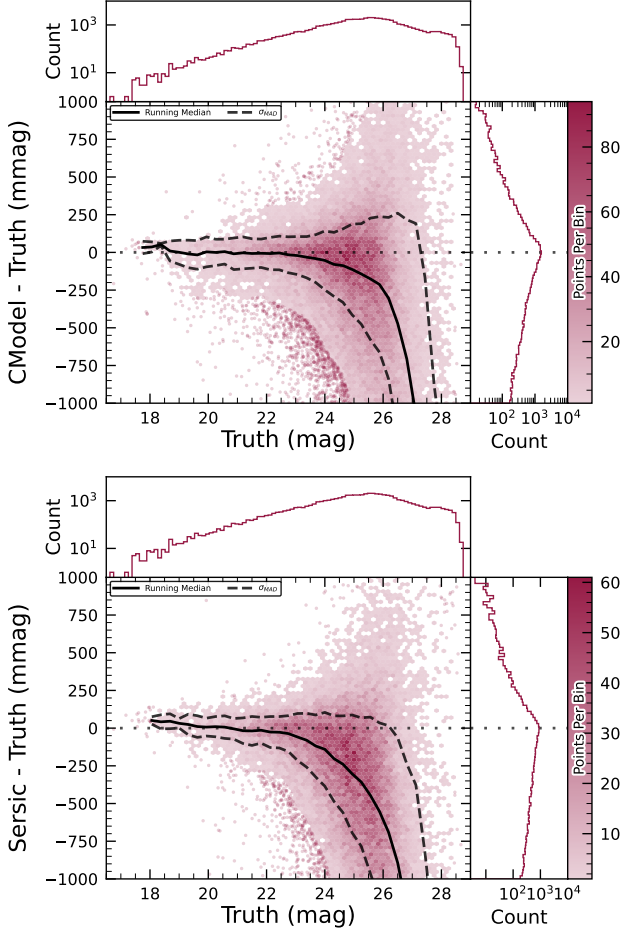


Figure 25. Magnitude residuals for matched injected galaxies with the CModel and Sersic algorithms.

corrected to yield total fluxes and thus are not recommended for use as total galaxy magnitudes.

Figure 25 shows $g - i$ color residuals versus r -band magnitude for the same sample of galaxies as Figure 25. For this and most other colors, GAaP (with a $1''$ aperture) and Sersic colors both yield lower scatter; however, the CModel colors have the smallest bias. Curiously, the GAaP bias appears to be magnitude-dependent, whereas the Sersic bias remains stable from $19 < r < 26$. Any of these color measurements are suitable for use for deriving quantities like photometric redshifts, stellar masses, etc.

In addition to photometry, some algorithms include measurements of structural parameters like size, ellipticity, and Sersic index. One particular known issue is that many (truly) faint objects have significantly overestimated sizes and fluxes, as was also seen in the Dark Energy Survey (K. Bechtol et al. 2025). We dub such objects “super-spreaders”. These super-spreaders contribute significantly to overestimated fluxes at the faint

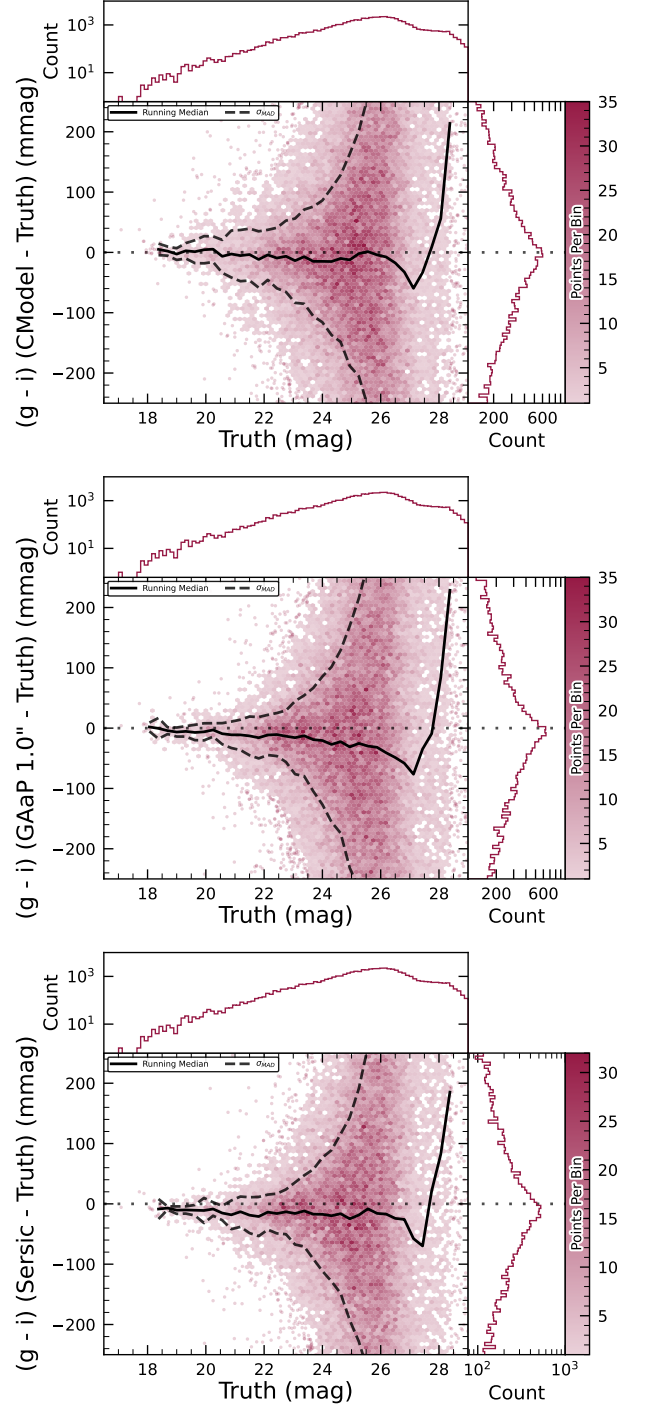


Figure 26. $g - i$ color residuals versus injected r -band magnitude for matched galaxies with the CModel, GAaP and Sersic algorithms.

end, and are particularly problematic for the Kron algorithm (R. G. Kron 1980), which is not recommended for general use.

As mentioned in §4.5, the Sersic fits include a free centroid, which is initialized from the fiducial centroid

of the object. Preliminary analyses of matched injected objects suggest that the galaxy [astrometry](#) residuals are somewhat smaller, and so users of the Sersic photometry should also use these centroid values (if needed). One caveat is that for faint objects and/or in crowded regions with unreliable deblending, free centroids can drift significantly and potentially towards other objects, so objects with large differences between the fiducial and Sersic [astrometry](#) should be used with caution.

5.7. Differential Chromatic Refraction

[Differential Chromatic Refraction](#) (DCR) occurs when light passes through Earth’s atmosphere, refracting more for shorter wavelengths, which causes blue light to appear shifted closer to the zenith. This wavelength-dependent effect results in the smearing of point sources along the zenith direction, specifically parallel to the parallactic angle. The DCR effect is observable in LSSTComCam data, particularly in the angular offset versus $g-i$ band magnitude difference plots, as shown in [Figure 27](#), which plots all direct sources with $\text{SNR} > 10$ from 41 visits from November 26, 2024. When looking at data perpendicular to the parallactic angle, sources show no DCR effect (as expected), forming a clear vertical distribution on the 2-dimensional density plots in [Figure 27](#).

In contrast, sources aligned with the parallactic angle exhibit a tilted, linear distribution, clearly demonstrating the relationship between angular offset and the $g-i$ band magnitude difference, thereby providing a visual indication of the [DCR](#) effect.

5.8. Difference Imaging Purity

We assessed the performance of image differencing using human vetting and source injection (§5.9). Members of the [DP1](#) team labeled more than 9500 DIASource image triplets consisting of cutouts from the science, template, and difference images. We classified these into various real and artifact categories. The raw artifact to real ratio without filtering was roughly 9:1. Bright stars are the main source of artifacts. Correlated noise, primarily in u and g bands, also leads to spurious detections near the threshold. We expect to be able to mitigate these effects for [LSSTCam](#).

Applying a reliability threshold improves the purity of transients but not variable stars; technical limitations at the time of model training prevented injection of variable stars into the synthetic training set. Reliability models for [LSSTCam](#) data will be trained on a wider range of input data.

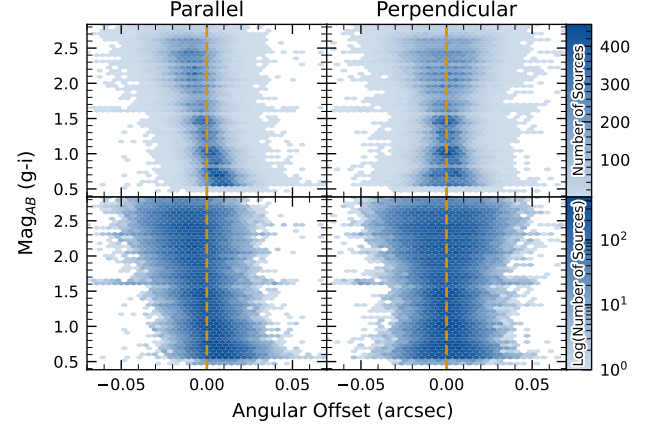


Figure 27. Visualization of [Differential Chromatic Refraction](#) (DCR) observed in the LSSTComCam commissioning campaign. The $g-i$ color is computed for every source in the reference catalog that is matched to a direct source in the science image, and the binned density for the full survey is plotted against the angular offset between the reference and detected positions. The angular offset is projected along coordinates parallel and perpendicular to the parallactic angle of the observation, and shows a characteristic correlation along the parallel axis with no correlation along the perpendicular axis. The orange vertical dashed line indicates the expected $g-i$ magnitude distribution at zero angular offset, while the green ‘x’ marks the average $g-i$ magnitude of the plotted sources.

5.9. Detection Completeness on Difference Images

We assess the performance of our difference imaging [pipeline](#) using synthetic source injection on the science images prior to differencing. We construct a catalog of injected sources by joining two different samples of point sources, a set of hosted sources to emulate transients in galaxies and second set of hostless sources.

The hosts are selected from the [pipeline](#) source catalog that is produced upstream by imposing a cut in their extendedness measurement, and selecting $N_{\text{src}} = \min(100, N \times 0.05)$ of the available sources per detector. For each host we pick a random position angle and radius using its light profile [shape](#), and also a random value of brightness for the injected source, with magnitudes higher than the host source. The hostless sources instead have random positions in the [CCD](#) focal plane, and with magnitudes chosen from a random uniform distribution with $20 \geq m \geq m_{\text{lim}} + 1$ with m_{lim} the limiting magnitude of the image.

We used the [LSST](#) package `source_injection` to include these sources into our test images, we performed a coordinate cross-match task, with a threshold of 0.”5 to find which of these sources were detected and which

were lost, enabling the calculation of a set of performance metrics.

In Figure 28 we show the detection completeness as function of the SNR, for sources in the ECDFS field, for filters *griz*. We observe a completeness $> 95\%$ for sources with $\text{SNR} > 6$, with mean completeness $\simeq 99\%$ and standard deviation of $\simeq 0.7\%$. In Fig-

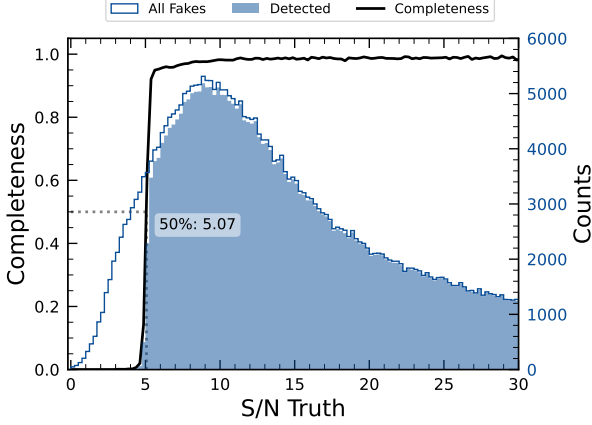


Figure 28. The difference image detection completeness for injected sources in the ECDFS field, for filters *griz*, as function of the estimated signal to noise ratio S/N. This completeness is the ratio between the found fake sources (shaded histogram) and all the sources (solid line). The horizontal dashed line represents where the 50% completeness level is reached, at approximately $\text{S/N} \simeq 5.07$.

ure 29 we show the distribution of the residuals of the recovered sky coordinates for the detected synthetic sources. The marginal distributions are both centered at zero, and they are compatible with normal distributions $\mathcal{N}(0, 0''.04)$. In Figure 30 we show the recovered magnitudes for our detected synthetic sources in the *i* filter, using PSF photometry on the difference images, and also show marginal distributions of the true magnitudes for fake sources, and the residuals on the left, split into hosted and hostless. Our flux measurements are accurate within a wide range of magnitudes, for both hosted and hostless synthetic sources. For true $m_i < 22.2$, the median PSF magnitudes residuals are < 0.1 . When considering the flux pulls $\delta = (f - f_{\text{True}})/\sigma_f$ for PSF flux f and error σ_f , we find that $|\langle \delta \rangle| < 0.1$, and $\sigma_\delta < 1.1$ for $m_i < 21.6$.

5.10. Solar System

5.10.1. Asteroid Linking Performance

DP1 performance evaluation of asteroid linking focused on demonstrating discovery capability. The so-

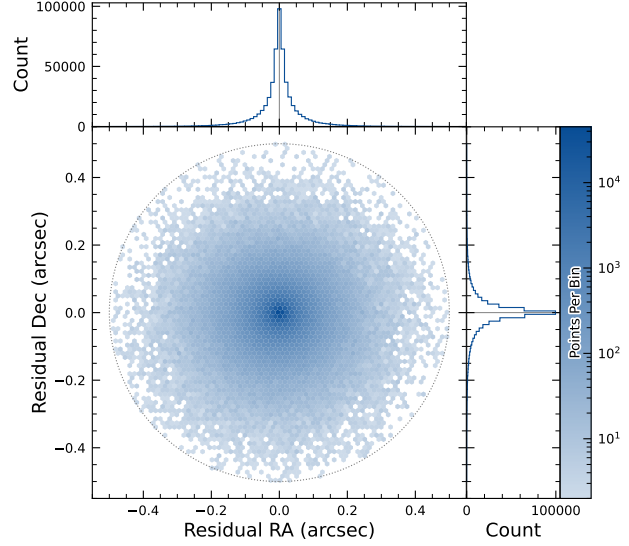


Figure 29. Coordinate residuals for detected synthetic sources in difference images, between recovered and true position of the sources in the ECDFS field. In the top and right panels we include the histogram of these offsets. The circle reflects the matching radius of $0''.5$.

lar system discovery pipeline produced 269,581 tracklets, 5,691 linkages, and 281 post-processed candidates.

We performed a conservative manual investigation of these 281 candidates, producing a curated list of 93 probable new asteroid discoveries. All of these candidates are identified as main-belt asteroids. As described in Section 4.6.3, post processing of the heliolinc output with link_purify produced a final set of 281 candidate linkages, ranked with the most promising candidates first. Using find_orb (B. Gray 2025), we derived orbit fits for each candidate, sorting the resulting list by χ^2_{dof} , the quality of the fit. Manual inspection of the linkages indicated that those ranked 0–137 corresponded to unique real asteroids; ranks 138–200 contained additional real objects intermixed with some spurious linkages; and ranks higher than 200 were essentially all spurious. This analysis indicates that it will be possible to identify cuts on quality metrics like χ^2 to derive discovery candidate samples with high purity; determining the exact quantitative cut values requires more data with LSSTCam. We next removed all observations matched to known asteroids (using Minor Planet Center’s MPChecker service), reducing the number of candidates to 97. Of these, four had strong astrometric and/or photometric outliers, likely due to self-subtraction in difference images due to the unavoidable limitations of template generation from the limited

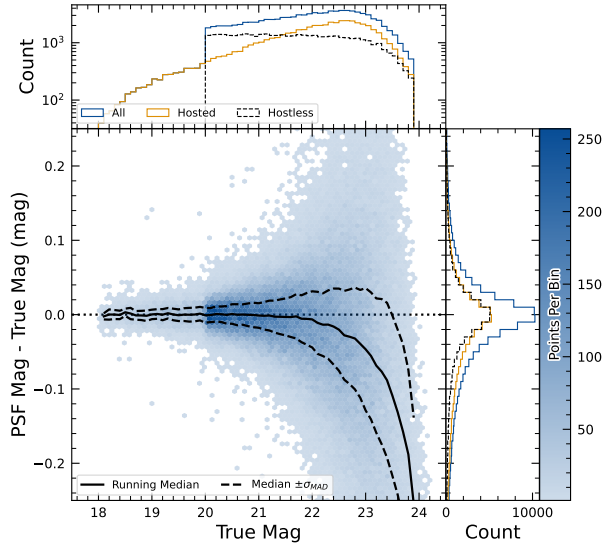


Figure 30. Magnitude residuals for PSF photometry on difference images for ECDFS field in i for detected fake sources. In black solid and dashed lines: the running median, and the mean absolute deviation. Top panel: the distribution of true magnitudes for hostless and hosted fake sources. Right panel: the distribution of magnitude residuals for hostless and hosted sources.

quantity of data available from LSSTComCam. We suspect these four linkages do correspond to real objects, but have chosen to discard them out of an abundance of caution. The remaining 93 were submitted to the Minor Planet Center and accepted as new discoveries, demonstrating the LSST pipelines are able to successfully discover new solar system objects.

5.10.2. Asteroid Association Performance

Solar system association associated 5988 DiaSources to 431 unique solar system objects. These include 3,934 DiaSources to 338 already-known MPC objects and 2,054 DiaSources to the 93 newly-discovered objects. Association also picked up an additional 143 detections of newly discovered objects. These were not originally found by the discovery pipelines as they didn't satisfy the number and/or maximum time span requirements to form tracklets.

The astrometric residuals of known asteroid association are shown in Figure 31. Astrometric precision for solar system sources is excellent, the majority of objects detected within $0''.1$ of their expected positions. Taking the unsigned median residuals to search for biases, we find that previously-known objects have mean residuals of $0''.001$ and $-0''.016$ in the RA and Dec directions

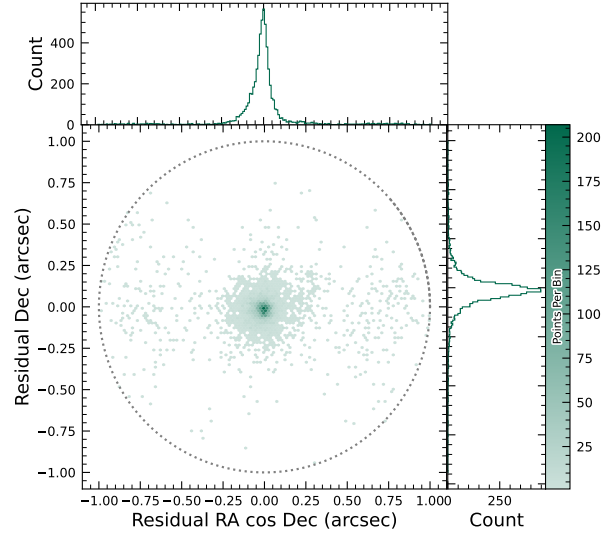


Figure 31. Astrometric residuals between expected and observed positions of SSOs in DP1. The median residuals are $0''.001$ and $-0''.016$ in R.A./Dec direction, with the standard deviations of $0''.19$ and $0''.10$, respectively. No detectable systematic offset from zero indicates there are no major errors in either timing or astrometry delivered by the Rubin system. The wider scatter in the RA-direction is due to objects whose measured orbital elements are less well constrained, translating to larger along-track positional errors in the predicted positions.

respectively, while newly-discovered objects have mean residuals of $-0''.035$ and $-0''.010$ in the RA and Dec directions, respectively. These mean residuals are small enough to eliminate the possibility of a timing offset greater than the second-scale shutter motion (which is uncharacterized for LSSTComCam).

5.11. Crowded Fields

Two of the seven DP1 target fields exhibit high stellar density, 47 Tucanae and the Fornax dwarf galaxy. 47 Tucanae was chosen as an initial stress test for the science pipelines processing. The Fornax dwarf galaxy also exhibits high stellar density, particularly in its central regions.

6. RUBIN SCIENCE PLATFORM

The RSP (M. Jurić et al. 2019; F. Economou 2023) is a powerful, cloud-based environment for scientific research and analysis of petascale-scale astronomical survey data. It serves as the primary interface for scientists to access, visualize, and conduct next-to-the-data analysis of Rubin and LSST data. The RSP is designed around a “bring the compute to the data” princi-

ple, eliminating the need for users to download massive datasets. Although DP1 is much smaller in size (3.5 TB) than many current survey datasets, future LSST datasets will be far larger and more complex, making it crucial to co-locate data and analysis for effective scientific discovery.

The RSP provides users with access to data and services through three distinct user-facing Aspects: a *Portal*, which facilitates interactive exploration of the data; a JupyterLab-based *Notebook* environment for data analysis using Python; and an extensive set of *Application Programming Interfaces (APIs)* that enable programmatic access to both data and services. The three Aspects are designed to be fully integrated, enabling seamless workflows across the RSP. The data products described in §3 are accessible via all three Aspects, and the system facilitates operations such as starting a query in one Aspect and retrieving its results in another. Figure 32 shows the Rubin Science Platform landing page in the Google cloud.

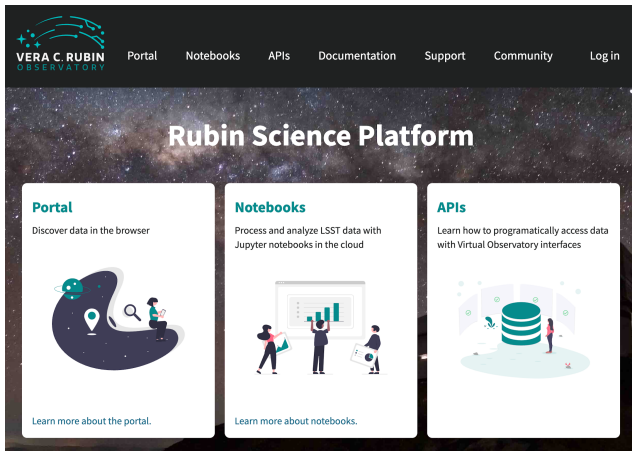


Figure 32. The Rubin Science Platform landing page showing the three Aspects as well as links to documentation and support information.

The RSP is supported by a number of back-end services, including databases, files, and batch computing. Support for collaborative work through shared workspaces is also included in the RSP.

A preview of the RSP was launched on Google Cloud in 2022, operating under a shared-risk model to support Data Preview 0 (W. O’Mullane et al. 2024a). This allowed the community to test the platform, begin preparations for science, and provide valuable feedback to inform ongoing development. It was the first time an astronomical research environment was hosted in a cloud environment. The DP1 release brings major updates to RSP services, enhancing scientific analysis capabilities.

The RSP remains under active development, with incremental improvements being rolled out as they mature. During the Rubin Early Science Phase, the RSP will continue to operate under a shared-risk model. This section outlines the RSP functionality available at the time of the DP1 release and provides an overview of planned future capabilities.

6.1. Rubin Data Access Center

The Rubin USDAC utilizes a novel hybrid on-premises-cloud architecture, which combines on-premises infrastructure at the USDF at SLAC with flexible and scalable resources in the Google cloud. This architecture has been deployed and tested using the larger simulated data set of DP0.2 (W. O’Mullane et al. 2024b).

In this hybrid model, user-facing services are deployed in the cloud to support dynamic scaling in response to user demand and to simplify the provisioning and management of large numbers of science user accounts. The majority of the static data products described in §3 are stored on-premises at the USDF to benefit from cost-effective mass storage and close integration with Rubin data processing infrastructure, also located at the USDF. For imaging data, the Data Butler (§6.2.2) provides the interface between the cloud-based users and data services, and the on-premises data. For catalog data, a cloud-based TAP client (§6.2.1) submits queries to the on-premises Qserv database cluster (§6.5) and retrieves the results. In the initial DP1 deployment, catalog data is hosted at the USDF while image data is stored in the cloud. The full hybrid model will be rolled out and further tested following the release of DP1.

The RSP features a single-sign-on authentication and authorization system to provide secure access for Rubin data rights holders (R. Blum & the Rubin Operations Team 2020).

6.2. API Aspect

The API Aspect provides a comprehensive set of user-facing interfaces for programmatic access to the DP1 data products, through both IVOA-compliant services and the Rubin Data Butler. IVOA services enable standard queries and integration with existing tools, while the Butler facilitates advanced data processing within the LSST Science Pipelines.

At the time of the DP1 release, some IVOA services are unavailable, and certain data products are only accessible via the Butler. This section provides an overview of the available IVOA services and Butler access.

6.2.1. IVOA Services

Rubin has adopted a **Virtual Observatory (VO)**-first design philosophy, prioritizing compliance with **IVOA** standard interfaces to foster interoperability, standardization, and collaboration. In cases where standardized protocols have yet to be established, additional services have been introduced to complement these efforts. This approach ensures that the RSP can be seamlessly integrated with community-standard tools such as **Tool for OPERations on Catalogues And Tables (TOPCAT)** (M. Taylor 2011) and **Aladin** (F. Bonnarel et al. 2000; T. Boch & P. Fernique 2014; M. Baumann et al. 2022), as well as libraries such as **PyVO** (M. Graham et al. 2014).

The user-facing **APIs** are also used internally within the **RSP**, creating a unified design that ensures consistent and reproducible workflows across all three Aspects. This reduces code duplication, simplifies maintenance, and ensures all users, both internal and external, access data in the same way. For example, an **Astronomical Data Query Language (IVOA standard) (IVOA)** query on the **Object** catalog via **TAP** yields identical results whether run from the Portal, Notebook, or an external client.

The following **IVOA** services are available at the time of the DP1 release:

- **Table Access Protocol (TAP) Service:** A TAP service (P. Dowler et al. 2019) enables queries of catalog data via the IVOA-standard **ADQL**, a dialect of SQL92 with spherical geometry extensions. The main **TAP** service for **DP1** runs on the Rubin-developed **Qserv** database (§ 6.5), which hosts the core science tables described in §3.2, as well as the Visit database. It also provides image metadata in the IVOA **ObsCore** format via the standard **ivoa.ObsCore** table, making it an “ObsTAP” service (ObsTAP; M. Louys et al. 2017). The TAP service is based on the **Canadian Astronomy Data Centre (CADC)**’s open-source Java TAP implementation⁸⁵, modified for the exact query language accepted by Qserv. It currently supports a large subset of ADQL, with limitations documented in the data release materials (see §7.1) and exposed via the **TAP capabilities** endpoint where possible.

The TAP service provides metadata annotations consistent with the standard, including table and column descriptions, indications of foreign-key relationships between tables, and column metadata

such as units and **IVOA** Unified Content Descriptors (UCDs).

- **Image Access Services:** Rubin image access services are compliant with **IVOA SIAv2** (Simple Image Access Protocol, version 2; T. Jenness et al. 2024; P. Dowler et al. 2015) for discovering and accessing astronomical images based on **metadata**. SIAv2 is a **REpresentational State Transfer (REST)**-based protocol that supports the discovery and retrieval of image data. For example, executing a query for all images in a given band over a particular sky region observed during a given period.

Users identify an image or observation of interest and query the service. The result set includes **metadata** about the image, such as the sky position, time, or band, and a data access URL, which includes an IVOA Identifier uniquely identifying the dataset (T. Jenness & G. P. Dubois-Felsmann 2025), allowing the dataset to be retrieved or a cutout requested via **Server-side Operations for Data Access (IVOA standard)** ().

- **Image Cutout Service:** The Rubin Cutout Service (R. Allbery 2023, 2024) is based on the **IVOA SODA** (Server-side Operations for Data Access; F. Bonnarel et al. 2017). Users submit requests specifying sky coordinates and the cutout size as the radius from the coordinates, and the service performs the operation on the full image and returns a result set. For **DP1**, the cutout service is a single cutout service only where N cutout requests will require N independent synchronous calls. We expect some form of bulk cutout service by mid 2026, approximately contemporaneously with **DP2**.
- **HiPS Data Service:** An authenticated **HiPS** (P. Fernique et al. 2017) data service for seamless pan-and-zoom access to large-scale co-adds. It supports fast interactive progressive image exploration at a range of resolutions.
- **WebDAV:** A **Web Distributed Authoring and Versioning (WebDav)** service is provided to enable users to remotely manage, edit, and organize files and directories on the **RSP** as if they were local files on their own computer. This is especially useful for local development.

6.2.2. Data Butler

The Rubin Data Butler (T. Jenness et al. 2022; N. B. Lust et al. 2023), is a high-level interface designed to

⁸⁵ <https://github.com/opencadc/tap>

facilitate seamless access to data for both users and software systems. This includes managing storage formats, physical locations, data staging, and database mappings. A *Butler* repository contains two components:

- the *Data Store*: A physical storage system for datasets, e.g., a *Portable Operating System Interface (POSIX)* file system or S3 object store; and
- the *Registry*: An *Structured Query Language (SQL)*-compatible database that stores metadata about the datasets in the data store, see §??.

For DP1, the *Butler* repository is hosted in the Google Cloud, using an (*Amazon*) *Simple Storage Service (S3)*-compatible store for datasets and AlloyDB, a PostgreSQL-compatible database, for the registry.

In the context of the *Butler*, a *dataset* refers to a unique data product, such as an image, catalog or map, generated by the observatory or processing pipelines. Datasets belong to one of the various types of data products, described in §3. The *Butler* ensures that each dataset is uniquely identifiable by a combination of three pieces of information: a data coordinate, a dataset type, and a run collection. For example, a dataset that represents a single raw image with detector 8 during the on-sky campaign on the night starting 2024-11-11 in the *i* band with exposure ID 2024111100074 would be represented as `dataId='exposure':2024111100074, 'band':'i', 'instrument':'LSSTComCam'` and is associated with the *raw* *DatasetType*. For a deep coadd on a *patch* of sky in the Seagull field, there would be no exposure dimensions and instead the tract, *patch* and band would be specified as `dataId='tract':7850, 'patch':6, 'band':'g', 'instrument':'LSSTComCam', skymap='lsst_cells_v1'` and is associated with the *deep_coadd* *DatasetType*.

The data coordinate is used to locate a dataset in multi-dimensional space, where dimensions are defined in terms of scientifically meaningful concepts, such as instrument, visit, detector or band. For example, a calibrated single-visit image (§3.1) has dimensions including band, instrument, and detector. In contrast, the visit table (§3.2), a catalog of all calibrated single-epoch visits in DP1, has only the instrument dimension. The main dimensions used in DP1 are listed, together with a brief description, in Table 6. To determine which dimensions are relevant for a specific dataset, the *Butler* defines dataset types, which associate each dataset with its specific set of relevant dimensions, as well as the associated Python type representing the dataset. The dataset type defines the kind of data a dataset repre-

sents, such as a raw image (*raw*), a processed catalog (*object_forced_source*), or a *sky map* (*skyMap*).

Table 7 lists all the dataset types available via the *Butler* in DP1, together with the dimensions needed to uniquely identify a specific dataset and the number of unique datasets of each type. It is important to highlight a key difference between accessing catalog data via the *TAP* service versus the *Butler*. While the *TAP* service contains entire catalogs, many of the same catalogs in the *Butler* are split into multiple separate catalogs. This is partly due to how these catalogs are generated, but also because of the way data is stored within and retrieved from the *Butler* repository – it is inefficient to retrieve the entire *Source* catalog, for example, from the file system. Instead, because the *Source* catalog contains data for sources detected in the *visit_images*, there is one *Source* catalog in the *Butler* for each *visit_image*. Similarly, there is one *Object* catalog for each *deep_coadd*. All the catalogs described in §3.2, aside from the *CcdVisit*, *SSObject*, *SSSource*, and *Calibration* catalogs, are split within the *Butler*.

A dataset is associated with one or more *Collections*; logical groupings of datasets within the *Butler* system that were created or processed together by the same batch operation. Collections allow multiple datasets with the same data coordinate to coexist without conflict. Collections support flexible, parallel processing by enabling repeated analyses of the same input data using different configurations.

For DP1, a subset of the consolidated database contents (§6.5.2) is accessible through the Data *Butler*. However, not all metadata from the *Visit* table (§3.4) is available. The DP1 *Butler* is read-only; a writeable *Butler* is expected by mid-2026, around the time of DP2.

6.2.3. Remote Programmatic Access

The Rubin *RSP API* can be accessed from a local system by data rights holders outside of the *RSP*, by creating a user security token. This token can then be used as a bearer token for *API* calls to the *RSP* *TAP* service. This capability is especially useful for remote data analysis using tools such as *TOPCAT*, as well as enabling third-party systems (e.g., Community Alert Brokers) to access Rubin data. Additionally, it supports remote development with local IDEs, allowing for more flexible workflows and integration with external systems.

6.3. Portal Aspect

The Portal Aspect provides an interactive environment for exploratory data discovery, query, filtering, and visualization of both image and catalog data, without requiring programming experience.

Table 6. Descriptions of and valid values for the key data dimensions in DP1. YYYYMMDD signifies date and # signifies a single 0-9 digit.

Dimension	Format/Valid values	Description
day_obs	YYYYMMDD	A day and night of observations that rolls over during daylight hours.
visit	YYYYMMDD#####	A sequence of observations processed together; synonymous with “exposure” in DP1.
exposure	YYYYMMDD#####	A single exposure of all nine ComCam detectors.
instrument	LSSTComCam	The instrument name.
detector	0 - 8	A ComCam detector.
skymap	lsst_cells_v1	A set of tracts and patches that subdivide the sky into rectangular regions with simple projections and intentional overlaps.
tract	See Table 3	A large rectangular region of the sky.
patch	0 - 99	A rectangular region within a tract.
physical_filter	u_02, g_01, i_06, r_03, z_03, y_04	An astronomical filter.
band	u, g, r, i, z, y	An astronomical wave band.

Table 7. The name and number of each type of data product in the Butler and the dimensions required to identify a specific dataset.

Data Product	Name in Butler	Required Dimensions	Number in DP1
raw	raw	instrument, detector, exposure	16125
visit_image	visit_image	instrument, detector, visit	15972
deep_coadd	deep_coadd	band, skymap, tract, patch	2644
template_coadd	template_coadd	band, skymap, tract, patch	2730
difference_image	difference_image	instrument, detector, visit	15972
Source	source	instrument, visit	1786
Object	object	skymap, tract	29
ForcedSource	object_forced_source	skymap, tract, patch	636
DiaSource	dia_source	skymap, tract	25
DiaObject	dia_object	skymap, tract	25
ForcedSourceOnDiaObject	dia_object_forced_source	skymap, tract, patch	597
CCDVisit	visit_detector_table	instrument	1
SSObject	ss_object	—	1
SSSource	ss_source	—	1
Visit	visit_table	instrument	1

It enables users to search, visualize, and interact with large datasets through tools for catalog queries, image browsing, time series inspection, and cross-matching. The Portal is designed to support both exploratory data access and detailed scientific investigation.

The Portal is built on **Firefly** (X. Wu et al. 2019), a powerful web application framework developed by IPAC (Infrared Processing and Analysis Center). **Firefly** provides interactive capabilities such as customizable table views, image overlays, multi-panel visualizations, and linked displays between catalogs and images. Through **Firefly**, the Portal delivers a intuitive user experience, allowing users to analyze data visually while maintaining access to underlying metadata and query controls.

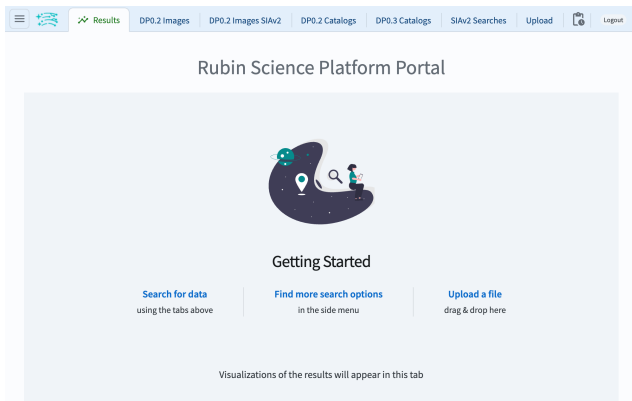


Figure 33. The Rubin Science Platform Portal Aspect

6.4. Notebook Aspect

The Notebook Aspect provides an interactive, web-based environment built on Jupyter Notebooks, enabling users to write and execute Python code directly on Rubin and **LSST** data without downloading it locally. It offers programmatic access to Rubin and **LSST** data products, allowing users to query and retrieve datasets, manipulate and display images, compute derived properties, plot results, and reprocess data using the **LSST Science Pipelines** (§4.1). The environment comes pre-installed with the pipelines and a broad set of widely used astronomical software tools, supporting immediate and flexible data analysis.

6.5. Databases

The user-facing Aspects of the **RSP** are supported by several backend databases that store catalog data products, image metadata, and other derived datasets. The schema for DP1 and other Rubin databases are available online at <https://sdm-schemas.lsst.io>.

6.5.1. Qserv

The final 10-year **LSST** catalog is expected to reach 15 PB and contain measurements for billions of stars and galaxies across trillions of detections. To support efficient storage, querying, and analysis of this dataset, Rubin Observatory developed **Qserv** (D. L. Wang et al. 2011; F. Mueller et al. 2023) – a scalable, parallel, distributed SQL database system. **Qserv** partitions data over approximately equal-area regions of the celestial sphere, replicates data to ensure resilience and high availability, and uses shared scanning to reduce overall I/O load. It also supports a package of scientific user-defined functions (SciSQL: <https://smonkewitz.github.io/scisql/>) simplifying complex queries involving spherical geometry, statistics, and photometry. **Qserv** is built on robust production-quality components, including MariaDB (<https://www.mariadb.org/>) and XRootD (<https://xrootd.org/>). **Qserv** runs at the **USDF** and user access to catalog data is via the TAP service (§6.2.1). This enables catalog-based analysis through both the **RSP** Portal and Notebook Aspects.

Although the small **DP1** dataset does not require **Qserv**’s full capabilities, we nevertheless chose to use it for **DP1** to accurately reflect the future data access environment and to gain experience with scientifically-motivated queries ahead of full-scale deployment. **Qserv** is open-source and available on GitHub: <https://github.com/lsst/qserv>.

6.5.2. Consolidated Database

The Consolidated Database (ConsDB) (K.-T. Lim 2025) is an SQL-compatible database designed to store and manage metadata for Rubin Observatory science and calibration images. Metadata are recorded on a per-exposure basis and includes information such as the target name, pointing coordinates, observation time, physical filter and band, exposure duration, and environmental conditions (e.g., temperature, humidity, and wind speed). This key image metadata are also stored in the Butler Registry (§6.2.2), however the ConsDB stores additional information including derived metrics from image processing and information from the **Engineering and Facility Database (EFD)** transformed from the time dimension to the exposure dimension.

The ConsDB schema is organized into instrument-specific tables, e.g., **LSSTComCam** and **LSSTCam**, facilitating instrument-specific queries. Within the **LSST-ComCam** schema, data is further structured into tables for individual exposures and detectors. An example query on the **DP1** dataset might retrieve all visits within a specified time range in the r-band for a given **DP1** target.

The ConsDB is hosted at the [USDF](#). Following the initial release of DP1, a release of the DP1 exposure-specific ConsDB data will be made available through the [RSP](#), and accessible externally via TAP. The detailed [LSSTComCam](#) schema can be found at: https://sdm-schemas.lsst.io/cdb_lsstcomcam.html

7. SUPPORT FOR COMMUNITY SCIENCE

The Rubin Observatory has a science community that encompasses thousands of individuals worldwide, with a broad range of experience and expertise in astronomy in general, and in the analysis of optical imaging data specifically.

Rubin’s model to support this diverse community to access and analyze [DP1](#) emphasizes self-help via documentation and tutorials, and employs an open platform for asynchronous issue reporting that enables crowd-sourced solutions. These two aspects of community support are augmented by virtual engagement activities. In addition, Rubin supports its Users Committee to advocate on behalf of the science community, and supports the eight [LSST](#) Science Collaborations.

All of the resources for scientists that are discussed in this section are discoverable by browsing the For Scientists pages of the Rubin Observatory website⁸⁶.

7.1. Documentation

The data release documentation for [DP1](#), available at dp1.lsst.io. The contents include an overview of the [LSSTComCam](#) observations, descriptions of the data products, and a high-level summary of the processing pipelines. The DP1 release documentation is similar to the contents of this paper, but presented in a browsable, searchable webpage built with Sphinx⁸⁷, and written with a focus on applications of the data products to scientific analysis.

7.2. Tutorials

A suite of tutorials that demonstrate how to access and analyze [DP1](#) using the [RSP](#) accompanies the DP1 release. Jupyter Notebook tutorials are available via the “Tutorials” drop-down menu within the Notebook aspect of the [RSP](#). Tutorials for the Portal and API aspects of the [RSP](#) can be found in the data release documentation.

These tutorials are designed to be inclusive, accessible, clear, focused, and consistent. Their format and contents follow a set of guidelines ([M. L. Graham et al.](#)

2025) that are informed by industry standards in technical writing.

7.3. Community Forum

The venue for all user support is the Rubin Community Forum⁸⁸.

Questions about any and all aspects of the Rubin data products, pipelines, and services should be posted as new topics in the Support category. This includes beginner-level and “naive” questions, advanced scientific analysis questions, technical bug reports, account and data access issues, and everything in between. The Support category of the Forum is monitored by Rubin staff, who aim to respond to all new unsolved topics within 24 hours.

The Rubin Community Forum is built on the open-source Discourse platform. It was chosen because, for a worldwide community of ten thousand Rubin users, a traditional (i.e., closed) help desk represents a risk to Rubin science (e.g., many users with the same question having to wait for responses). The open nature of the Forum enables self-help by letting users search for similar issues, and enables crowd-sourced problem solving (and avoids knowledge bottlenecks) by letting users help users.

7.4. Engagement Activities

A variety of live virtual and in-person workshops and seminars offer learning opportunities to scientists and students working with [DP1](#).

- Rubin Science Assemblies (weekly, virtual, 1 hour): alternates between hands-on tutorials based on the most recent data release and open drop-in “office hours” with Rubin staff.
- Rubin Data Academy (annual, virtual, 3-4 days): an intense set of hands-on tutorials based on the most recent data release, along with co-working and networking sessions.
- Rubin Community Workshop (annual, virtual, 5 days), a science-focused conference of contributed posters, talks, and sessions led by members of the Rubin science community and Rubin staff

For schedules and connection information, visit the For Scientists pages of the Rubin Observatory website. Requests for custom tutorials and presentations for research groups are also accommodated.

⁸⁶ <https://rubinobservatory.org/>

⁸⁷ <https://www.sphinx-doc.org/>

⁸⁸ <https://community.lsst.org/>

7.5. Users Committee

This committee is charged with soliciting feedback from the science community, advocating on their behalf, and recommending science-driven improvements to the LSST data products and the Rubin Science Platform tools and services. Community members are encouraged to attend their virtual meetings and raise issues to their attention, so they can be included in the committee’s twice-yearly reports to the Rubin Observatory Director.

The community’s response to DP1 will be especially valuable input to DP2 and Data Release 1 (), and the Users Committee encourages all users to interact with them. For a list of members and contact information, visit the For Scientists pages of the Rubin Observatory website.

7.6. Science Collaborations

The eight LSST Science Collaborations are independent, worldwide communities of scientists, self-organized into collaborations based on their research interests and expertise. Members work together to apply for funding, build software infrastructure and analysis algorithms, and incorporate external data sets into their LSST-based research.

The Science Collaborations also provide valuable advice to Rubin Observatory on the operational strategies and data products to accomplish specific science goals, and Rubin Observatory supports the collaborations via staff liaisons and regular virtual meetings with Rubin operations leadership.

8. SUMMARY AND FUTURE RELEASES

Rubin Data Preview 1 (DP1) offers an initial look at the first on-sky data products and access services from the Vera C. Rubin Observatory. DP1 forms part of Rubin’s Early Science Program, and provides the scientific community with an early opportunity to familiarize themselves with the data formats and access infrastructure for the forthcoming Legacy Survey of Space and Time (LSST). This early release has a proprietary period of two years, during which time it is available to Rubin data rights holders only via the cloud-based Rubin Science Platform (RSP).

In this paper we have described the completion status of the observatory at the time of data acquisition, the commissioning campaign that forms the basis of DP1, and the processing pipelines used to produce early versions of data products. We provide details on the data products, their characteristics and known issues, and describe the RSP.

The data products described in this paper derive from observations obtained by LSSTComCam. LSSTComCam contains only around 5% the number of CCDs as the full LSST Science Camera (LSSTCam), yet the DP1 dataset that it has produced will already enable a very broad range of science. At 3.5 TB in size, DP1 covers a total area of $\sim 15 \text{ deg}^2$. and contains 1792 single-epoch images, 2644 deep coadded images, 2.3 million distinct astrophysical objects, including 93 new asteroid discoveries.

While some data products expected from the LSST are not yet available, e.g. cell-based coadds, several others have been provided in DP1 that will not be available in future releases. Difference images are included in DP1, but in future releases, these will be generated on-demand via services, rather than being provided as pre-produced products. The inclusion of these images in DP1 is possible due to the small dataset size, which makes it feasible to include them at this stage. As future releases will involve much larger datasets, this approach will no longer be possible.

The RSP is continually under development, and new functionality will continue to be deployed incrementally as it becomes available, and independent of future data releases. For example, user query history capabilities, context-aware documentation and a bulk cutout services are just a few of the services currently under development.

Coincident with the release of DP1, Rubin Observatory begins its Science Validation Surveys with the LSST Science Camera. This final commissioning phase will produce a dataset that will form the foundation for the second Rubin Data Preview, DP2, expected around mid to late 2026. Full operations – marking the start of the LSST – is expected to commence by the end of 2025.

ACKNOWLEDGMENTS

. This material is based upon work supported in part by the National Science Foundation through Cooperative Agreements AST-1258333 and AST-2241526 and Cooperative Support Agreements AST-1202910 and 2211468 managed by the Association of Universities for Research in Astronomy (AURA), and the Department of Energy under Contract No. DE-AC02-76SF00515 with the SLAC National Accelerator Laboratory managed by Stanford University. Additional Rubin Observatory funding comes from private donations, grants to universities, and in-kind support from LSST-DA Institutional Members.

This work has been supported by the French National Institute of Nuclear and Particle Physics (IN2P3) through dedicated funding provided by the National Center for Scientific Research (CNRS).

This work has been supported by STFC funding for UK participation in LSST, through grant ST/Y00292X/1.

Facilities: Rubin:Simonyi (LSSTComCam), US-DAC, USDF

Software: Rubin Data Butler (T. Jenness et al. 2022), LSST Science Pipelines (Rubin Observatory Science Pipelines Developers 2025), LSST Feature Based Scheduler v3.0 (P. Yoachim et al. 2024; E. Naghib et al. 2019) Astropy (Astropy Collaboration et al. 2013, 2018, 2022) PIFF (M. Jarvis et al. 2021), GBDES (G. M. Bernstein 2022), Qserv (D. L. Wang et al. 2011; F. Mueller et al. 2023), Slurm, HTCondor, CVMFS, FTS3, ESN

APPENDIX

Glossary

Adam: Adaptive Moment Estimation. 25

ADQL: Astronomical Data Query Language (IVOA standard). 47

ADU: Analogue-to-Digital Unit. 21

airmass: The pathlength of light from an astrophysical source through the Earth’s atmosphere. It is given approximately by $\sec z$, where z is the angular distance from the zenith (the point directly overhead, where $\text{airmass} = 1.0$) to the source. 19

Alert: A packet of information for each source detected with signal-to-noise ratio > 5 in a difference image by Alert Production, containing measurement and characterization parameters based on the past 12 months of LSST observations plus small cutouts of the single-visit, template, and difference images, distributed via the internet. 18

Alert Production: Executing on the Prompt Processing system, the Alert Production payload processes and calibrates incoming images, performs Difference Image Analysis to identify DIASources and DIAObjects, and then packages the resulting alerts for distribution.. 25

algorithm: A computational implementation of a calculation or some method of processing. 6, 21, 24, 35

AOS: Active Optics System. 5, 6

API: Application Programming Interface. 44, 46, 47, 49

arcmin: arcminute minute of arc (unit of angle). 33

ASPIC: Analog Signal Processing Integrated Circuit. 21

astrometry: In astronomy, the sub-discipline of astrometry concerns precision measurement of positions (at a reference epoch), and real and apparent motions of astrophysical objects. Real motion means 3-D motions of the object with respect to an inertial reference frame; apparent motions are an artifact of the motion of the Earth. Astrometry per se is sometimes confused with the act of determining a World Coordinate System (WCS), which is a functional characterization of the mapping from pixels in an image or spectrum to world coordinate such as (RA, Dec) or wavelength. 18, 37

ATLAS: Asteroid Terrestrial-impact Last Alert System. 18

au: astronomical unit. 26

B: Byte (8 bit). 34

background: In an image, the background consists of contributions from the sky (e.g., clouds or scattered moonlight), and from the telescope and camera optics, which must be distinguished from the astrophysical background. The sky and instrumental backgrounds are characterized and removed by the LSST processing software using a low-order spatial function whose coefficients are recorded in the image metadata. 14, 16, 18, 19, 21, 23

Butler: A middleware component for persisting and retrieving image datasets (raw or processed), calibration reference data, and catalogs. 14, 16, 17, 19, 48, 49

CADC: Canadian Astronomy Data Centre. 47

cadence: The sequence of pointings, visit exposures, and exposure durations performed over the course of a survey. [4](#)

calibration: The process of translating signals produced by a measuring instrument such as a telescope and camera into physical units such as flux, which are used for scientific analysis. Calibration removes most of the contributions to the signal from environmental and instrumental factors, such that only the astronomical component remains. [6](#), [7](#), [12](#), [14](#), [18](#), [20](#), [22](#), [23](#), [32](#)

Camera: The LSST subsystem responsible for the 3.2-gigapixel LSST camera, which will take more than 800 panoramic images of the sky every night. SLAC leads a consortium of Department of Energy laboratories to design and build the camera sensors, optics, electronics, cryostat, filters and filter exchange mechanism, and camera control system. [4](#)

camera: An imaging device mounted at a telescope focal plane, composed of optics, a shutter, a set of filters, and one or more sensors arranged in a focal plane array. [11](#), [14](#), [19](#), [20](#), [23](#), [34](#)

CCD: [Charge-Coupled Device](#). [6](#), [12](#), [14](#), [22](#), [34](#), [40](#)

Center: An entity managed by AURA that is responsible for execution of a federally funded project. [18](#), [26](#), [44](#)

Charge-Coupled Device: a particular kind of solid-state sensor for detecting optical-band photons. It is composed of a 2-D array of pixels, and one or more read-out amplifiers. [6](#)

cloud: A visible mass of condensed water vapor floating in the atmosphere, typically high above the ground or in interstellar space acting as the birthplace for stars. Also a way of computing (on other peoples computers leveraging their services and availability).. [5](#), [44–46](#)

Commissioning: A two-year phase at the end of the Construction project during which a technical team a) integrates the various technical components of the three subsystems; b) shows their compliance with ICDs and system-level requirements as detailed in the LSST Observatory System Specifications document (OSS, LSE-30); and c) performs science verification to show compliance with the survey performance specifications as detailed in the LSST Science Requirements Document (SRD, LPM-17). [4](#)

configuration: A task-specific set of configuration parameters, also called a 'config'. The config is read-only; once a task is constructed, the same configuration will be used to process all data. This makes the data processing more predictable: it does not depend on the order in which items of data are processed. This is distinct from arguments or options, which are allowed to vary from one task invocation to the next. [5](#), [20](#)

CTI: Charge Transfer Inefficiency. [6](#), [12](#), [20](#), [21](#)

Data Management System: The computing infrastructure, middleware, and applications that process, store, and enable information extraction from the LSST dataset; the DMS will process petascale data volume, convert raw images into a faithful representation of the universe, and archive the results in a useful form. The infrastructure layer consists of the computing, storage, networking hardware, and system software. The middleware layer handles distributed processing, data access, user interface, and system operations services. The applications layer includes the data pipelines and the science data archives' products and services. [4](#)

Data Release: The approximately annual reprocessing of all LSST data, and the installation of the resulting data products in the LSST Data Access Centers, which marks the start of the two-year proprietary period. [17](#), [18](#)

Data Release Processing: Deprecated term; see Data Release Production. [20](#)

DC2: Data Challenge 2 ([DESC](#)). [35–37](#)

DCR: [Differential Chromatic Refraction](#). [19](#), [23](#), [37](#)

deblend: Deblending is the act of inferring the intensity profiles of two or more overlapping sources from a single footprint within an image. Source footprints may overlap in crowded fields, or where the astrophysical phenomena intrinsically overlap (e.g., a supernova embedded in an external galaxy), or by spatial co-incidence (e.g., an asteroid passing in front of a star). Deblending may make use of a priori information from images (e.g., deep CoAdds or visit images obtained in good seeing), from catalogs, or from models. A 'deblend' is commonly referred to in terms of 'parent' (total) and 'child' (component) objects. [24](#)

deg: degree; unit of angle. [26](#)

- Department of Energy:** cabinet department of the United States federal government; the DOE has assumed technical and financial responsibility for providing the LSST camera. The DOE's responsibilities are executed by a collaboration led by SLAC National Accelerator Laboratory. 4
- DES:** Dark Energy Survey. 18, 19, 31
- DESC:** Dark Energy Science Collaboration. 25, 35
- DIA:** Difference Image Analysis. 20
- Difference Image Analysis:** The detection and characterization of sources in the Difference Image that are above a configurable threshold, done as part of Alert Generation Pipeline. 20
- Differential Chromatic Refraction:** The refraction of incident light by Earth's atmosphere causes the apparent position of objects to be shifted, and the size of this shift depends on both the wavelength of the source and its airmass at the time of observation. DCR corrections are done as a part of DIA. 19, 37, 40
- DIMM:** Differential Image Motion Monitor. 11
- Director:** The person responsible for the overall conduct of the project; the LSST director is charged with ensuring that both the scientific goals and management constraints on the project are met. S/he is the principal public spokesperson for the project in all matters and represents the project to the scientific community, AURA, the member institutions of LSSTDA, and the funding agencies. 52
- Document:** Any object (in any application supported by DocuShare or design archives such as PDM-Works or GIT) that supports project management or records milestones and deliverables of the LSST Project. 12
- DOE:** Department of Energy. 4
- DP0:** Data Preview 0. 4
- DP1:** Data Preview 1. 4–7, 9, 10, 12–23, 26, 29, 32, 37, 42, 44–49, 51–53
- DP2:** Data Preview 2. 4, 47, 49, 52, 53
- DPDD:** Data Product Definition Document. 12
- DR1:** Data Release 1. 52
- DR3:** Data Release 3. 19, 23, 33
- DRP:** Data Release Processing. 20
- E2V:** Teledyne. 6
- ECDFS:** Extended Chandra Deep Field-South Survey. 9, 31, 35, 36, 41, 42
- Education and Public Outreach:** The LSST subsystem responsible for the cyberinfrastructure, user interfaces, and outreach programs necessary to connect educators, planetaria, citizen scientists, amateur astronomers, and the general public to the transformative LSST dataset. 4
- EFD:** Engineering and Facility Database. 51
- EPO:** Education and Public Outreach. 4
- epoch:** Sky coordinate reference frame, e.g., J2000. Alternatively refers to a single observation (usually photometric, can be multi-band) of a variable source. 5, 9, 12, 18, 24, 53
- ESO:** European Southern Observatory. 18
- FBS:** Feature-Based Scheduler. 9
- FGCM:** Forward Global Calibration Model. 23
- Firefly:** A framework of software components written by IPAC for building web-based user interfaces to astronomical archives, through which data may be searched and retrieved, and viewed as FITS images, catalogs, and/or plots. Firefly tools will be integrated into the Science Platform. 50
- FITS:** Flexible Image Transport System. 19
- Flexible Image Transport System:** an international standard in astronomy for storing images, tables, and metadata in disk files. See the IAU FITS Standard for details. 19
- flux:** Shorthand for radiative flux, it is a measure of the transport of radiant energy per unit area per unit time. In astronomy this is usually expressed in cgs units: erg/cm²/s. 15–18, 21, 25, 35, 41
- forced photometry:** A measurement of the photometric properties of a source, or expected source, with one or more parameters held fixed. Most often this means fixing the location of the center of the brightness profile (which may be known or predicted in advance), and measuring other properties such as total brightness, shape, and orientation. Forced photometry will be done for all Objects in the Data Release Production. 17, 18, 24–26

2996	FOV: field of view. 10	3035	M2: Secondary Mirror. 5, 6
2997	FrDF: French Data Facility. 20	3036	metadata: General term for data about data, e.g.,
2998	FWHM: Full Width at Half-Maximum. 6, 11, 13, 15,	3037	attributes of astronomical objects (e.g. images,
2999	16	3038	sources, astroObjects, etc.) that are characteris-
3000	GAaP: Gaussian Aperture and PSF. 37, 39	3039	tics of the objects themselves, and facilitate the
3001	Gaia: a space observatory of the European Space	3040	organization, preservation, and query of data sets.
3002	Agency, launched in 2013 and expected to oper-	3041	(E.g., a FITS header contains metadata). 15, 16,
3003	ate until 2025. The spacecraft is designed for as-	3042	19, 20, 47
3004	trometry: measuring the positions, distances and	3043	metric: A measurable quantity which may be tracked.
3005	motions of stars with unprecedented precision. 18	3044	A metric has a name, description, unit, references,
3006	Gaussian Aperture and PSF: involves Gaussianiz-	3045	and tags (which are used for grouping). A metric is
3007	ing the PSFs and then using a Gaussian aper-	3046	a scalar by definition. See also: aggregate metric,
3008	ture (instead of top-hat) for measuring photom-	3047	model metric, point metric. 32
3009	etry. The aperture+PSF is designed to be the	3048	middleware: Software that acts as a bridge between
3010	same across all bands, so that you measure consis-	3049	other systems or software usually a database or
3011	tent colors.. 37	3050	network. Specifically in the Data Management
3012	HEALPix: Hierarchical Equal-Area iso-Latitude Pix-	3051	System this refers to Butler for data access and
3013	elisation. 19	3052	Workflow management for distributed processing..
3014	HiPS: Hierarchical Progressive Survey (IVOA stan-	3053	21
3015	dard). 19, 47	3054	MPC: Minor Planet Center. 44
3016	HSM: Shape measurement algorithm from Hirata &	3055	MPCORB: Minor Planet Center Orbit database. 18
3017	Seljak (2003) and Mandelbaum et al. (2005). 29	3056	National Science Foundation: primary federal
3018	IAU: International Astronomical Union. 18	3057	agency supporting research in all fields of funda-
3019	ISR: Instrument Signal Removal. 20–22	3058	mental science and engineering; NSF selects and
3020	ITL: Imaging Technology Laboratory (UA). 6, 9, 23,	3059	funds projects through competitive, merit-based
3021	30, 31, 34	3060	review. 4
3022	IVOA: International Virtual-Observatory Alliance. 14,	3061	NEO: Near-Earth Object. 26
3023	16, 17, 19, 46, 47	3062	NSF: National Science Foundation. 4
3024	LSST: Legacy Survey of Space and Time (formerly	3063	Object: In LSST nomenclature this refers to an astro-
3025	Large Synoptic Survey Telescope). 4, 5, 9, 10, 12,	3064	nomical object, such as a star, galaxy, or other
3026	17, 18, 41, 44, 50–53	3065	physical entity. E.g., comets, asteroids are also
3027	LSST Science Pipelines: software used to perform	3066	Objects but typically called a Moving Object or a
3028	the LSST data reduction pipelines.lsst.io. 8, 21,	3067	Solar System Object (SSObject). One of the DRP
3029	46, 50	3068	data products is a table of Objects detected by
3030	LSSTCam: LSST Science Camera. 4–6, 10, 32, 34, 37,	3069	LSST which can be static, or change brightness or
3031	40, 44	3070	position with time. 26, 47
3032	LSSTComCam: Rubin Commissioning Camera. 4–	3071	Operations: The 10-year period following construction
3033	10, 12–15, 21, 23, 25, 26, 29–31, 44, 51, 53	3072	and commissioning during which the LSST Obser-
3034	M1M3: Primary Mirror Tertiary Mirror. 5, 6	3073	vatory conducts its survey. 47
		3074	Pan-STARRS: Panoramic Survey Telescope and
		3075	Rapid Response System. 18
		3076	patch: An quadrilateral sub-region of a sky tract, with
		3077	a size in pixels chosen to fit easily into memory on
		3078	desktop computers. 13–16, 48

- pipeline:** A configured sequence of software tasks (Stages) to process data and generate data products. Example: Association Pipeline. [21](#), [26](#), [40](#), [42](#)
- PNG:** Portable Network Graphics. [19](#)
- POSIX:** Portable Operating System Interface. [48](#)
- provenance:** Information about how LSST images, Sources, and Objects were created (e.g., versions of pipelines, algorithmic components, or templates) and how to recreate them. [20](#)
- PSF:** Point Spread Function. [6](#), [11](#), [13–20](#), [22](#), [24](#), [25](#), [29](#), [31](#), [41](#), [43](#)
- PTC:** Photon Transfer Curve. [20](#)
- Qserv:** LSST’s distributed parallel database. This database system is used for collecting, storing, and serving LSST Data Release Catalogs and Project metadata, and is part of the Software Stack. [17](#), [46](#), [47](#), [51](#)
- RA:** Rapid Analysis. [33](#), [44](#)
- REB:** Readout Electronics Board. [21](#), [22](#)
- Release:** Publication of a new version of a document, software, or data product. Depending on context, releases may require approval from Project- or DM-level change control boards, and then form part of the formal project baseline. [19](#), [52](#)
- REST:** REpresentational State Transfer. [47](#)
- RINGSS:** Ring-Image Next Generation Scintillation Sensor. [11](#)
- RMS:** Root-Mean-Square. [32](#)
- RSP:** Rubin Science Platform. [19](#), [44](#), [47](#), [49–53](#)
- Rubin Operations:** operations phase of Vera C. Rubin Observatory. [23](#)
- S3:** (Amazon) Simple Storage Service. [48](#)
- S3DF:** SLAC Shared Scientific Data Facility. [25](#)
- schema:** The definition of the metadata and linkages between datasets and metadata entities in a collection of data or archive.. [17](#), [50](#)
- Science Collaboration:** An autonomous body of scientists interested in a particular area of science enabled by the LSST dataset, which through precursor studies, simulations, and algorithm development lays the groundwork for the large-scale science projects the LSST will enable. In addition to preparing their members to take full advantage of LSST early in its operations phase, the science collaborations have helped to define the system’s science requirements, refine and promote the science case, and quality check design and development work. [25](#)
- Science Pipelines:** The library of software components and the algorithms and processing pipelines assembled from them that are being developed by DM to generate science-ready data products from LSST images. The Pipelines may be executed at scale as part of LSST Prompt or Data Release processing, or pieces of them may be used in a standalone mode or executed through the Rubin Science Platform. The Science Pipelines are one component of the LSST Software Stack. [6](#)
- Science Platform:** A set of integrated web applications and services deployed at the LSST Data Access Centers (DACs) through which the scientific community will access, visualize, and perform next-to-the-data analysis of the LSST data products. [4](#), [5](#), [19](#), [44](#), [46](#), [50](#)
- SDSS:** Sloan Digital Sky Survey. [18](#), [19](#)
- seeing:** An astronomical term for characterizing the stability of the atmosphere, as measured by the width of the point-spread function on images. The PSF width is also affected by a number of other factors, including the airmass, passband, and the telescope and camera optics. [4](#), [11](#), [16](#), [24](#)
- Sensor:** A sensor is a generic term for a light-sensitive detector, such as a CCD. For LSST, sensors consist of a 2-D array of roughly 4K x 4K pixels, which are mounted on a raft in a 3x3 mosaic. Each sensor is divided into 16 channels or amplifiers. The 9 sensors that make up a raft are numbered from "0,0" through "2,2". [11](#)
- shape:** In reference to a Source or Object, the shape is a functional characterization of its spatial intensity distribution, and the integral of the shape is the flux. Shape characterizations are a data product in the DIASource, DIAObject, Source, and Object catalogs. [17](#), [19](#), [25](#), [31](#), [40](#)

- Simonyi Survey Telescope:** The telescope at the Rubin Observatory that will perform the LSST (this refers to all physical components: the mirror, the mount assembly, etc.).. 4
- sky map:** A sky tessellation for LSST. The Stack includes software to define a geometric mapping from the representation of World Coordinates in input images to the LSST sky map. This tessellation is comprised of individual tracts which are, in turn, comprised of patches. 49
- SLAC:** SLAC National Accelerator Laboratory. 25, 30
- SLAC National Accelerator Laboratory:** A national laboratory funded by the US Department of Energy (DOE); SLAC leads a consortium of DOE laboratories that has assumed responsibility for providing the LSST camera. Although the Camera project manages its own schedule and budget, including contingency, the Camera team's schedule and requirements are integrated with the larger Project. The camera effort is accountable to the LSSTPO.. 25
- Sloan Digital Sky Survey:** is a digital survey of roughly 10,000 square degrees of sky around the north Galactic pole, plus a 300 square degree stripe along the celestial equator. 18
- SLR:** Stellar Locus Regression. 18
- SNR:** Signal to Noise Ratio. 23, 37, 41
- SOAR:** Southern Astrophysical Research Telescope. 11
- SODA:** Server-side Operations for Data Access (IVOA standard). 47
- software:** The programs and other operating information used by a computer.. 50
- Source:** A single detection of an astrophysical object in an image, the characteristics for which are stored in the Source Catalog of the DRP database. The association of Sources that are non-moving lead to Objects; the association of moving Sources leads to Solar System Objects. (Note that in non-LSST usage "source" is often used for what LSST calls an Object.). 24
- SQL:** Structured Query Language. 48
- TAP:** Table Access Protocol (IVOA standard). 17, 46, 47, 49
- TOPCAT:** Tool for OPERations on Catalogues And Tables. 47, 49
- tracklet:** Links between unassociated DIASources within one night to identify moving objects. 26
- tract:** A portion of sky, a spherical convex polygon, within the LSST all-sky tessellation (sky map). Each tract is subdivided into sky patches. 13, 19, 20, 22, 32, 33
- transient:** A transient source is one that has been detected on a difference image, but has not been associated with either an astronomical object or a solar system body. 15, 18, 24
- UA:** University of Arizona. 6
- UKDF:** United Kingdom Data Facility. 20
- USDF:** United States Data Facility. 20, 45, 46, 51
- VLT:** Very Large Telescope (ESO). 18
- VO:** Virtual Observatory. 47
- VST:** VLT Survey Telescope. 18
- WCS:** World Coordinate System. 15, 16, 24
- WebDav:** Web Distributed Authoring and Versioning. 47
- WFD:** Wide Fast Deep. 9
- World Coordinate System:** a mapping from image pixel coordinates to physical coordinates; in the case of images the mapping is to sky coordinates, generally in an equatorial (RA, Dec) system. The WCS is expressed in FITS file extensions as a collection of header keyword=value pairs (basically, the values of parameters for a selected functional representation of the mapping) that are specified in the FITS Standard. 15
- XP:** B or R Photometry (Gaia). 18

REFERENCES

- Abazajian, K., Adelman-McCarthy, J. K., Agüeros, M. A., et al. 2004, AJ, 128, 502, doi: [10.1086/421365](https://doi.org/10.1086/421365)
- Ahumada, R., Allende Prieto, C., Almeida, A., et al. 2020, ApJS, 249, 3, doi: [10.3847/1538-4365/ab929e](https://doi.org/10.3847/1538-4365/ab929e)

- Aihara, H., AlSayyad, Y., Ando, M., et al. 2022, PASJ, 74, 247, doi: [10.1093/pasj/psab122](https://doi.org/10.1093/pasj/psab122)
- Allbery, R. 2023, IVOA SODA implementation experience, SQuaRE Technical Note SQR-063, NSF-DOE Vera C. Rubin Observatory. <https://sqr-063.lsst.io/>
- Allbery, R. 2024, Draft IVOA SODA web service specification, SQuaRE Technical Note SQR-093, NSF-DOE Vera C. Rubin Observatory. <https://sqr-093.lsst.io/>
- AlSayyad, Y. 2019, Coaddition Artifact Rejection and CompareWarp, Data Management Technical Note DMTN-080, NSF-DOE Vera C. Rubin Observatory. <https://dmtn-080.lsst.io/>
- Ansel, J., Yang, E., He, H., et al. 2024, in 29th ACM International Conference on Architectural Support for Programming Languages and Operating Systems, Volume 2 (ASPLOS '24) (ACM), doi: [10.1145/3620665.3640366](https://doi.org/10.1145/3620665.3640366)
- Astropy Collaboration, Robitaille, T. P., Tollerud, E. J., et al. 2013, A&A, 558, A33, doi: [10.1051/0004-6361/201322068](https://doi.org/10.1051/0004-6361/201322068)
- Astropy Collaboration, Price-Whelan, A. M., Sipőcz, B. M., et al. 2018, AJ, 156, 123, doi: [10.3847/1538-3881/aabc4f](https://doi.org/10.3847/1538-3881/aabc4f)
- Astropy Collaboration, Price-Whelan, A. M., Lim, P. L., et al. 2022, ApJ, 935, 167, doi: [10.3847/1538-4357/ac7c74](https://doi.org/10.3847/1538-4357/ac7c74)
- Baumann, M., Boch, T., Pineau, F.-X., et al. 2022, in Astronomical Society of the Pacific Conference Series, Vol. 532, Astronomical Data Analysis Software and Systems XXX, ed. J. E. Ruiz, F. Pierfederici, & P. Teuben, 7
- Bechtol, K., Sevilla-Noarbe, I., Drlica-Wagner, A., et al. 2025, arXiv e-prints, arXiv:2501.05739, doi: [10.48550/arXiv.2501.05739](https://doi.org/10.48550/arXiv.2501.05739)
- Berk, A., Anderson, G. P., Bernstein, L. S., et al. 1999, in Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series, Vol. 3756, Optical Spectroscopic Techniques and Instrumentation for Atmospheric and Space Research III, ed. A. M. Larar, 348–353, doi: [10.1117/12.366388](https://doi.org/10.1117/12.366388)
- Bernstein, G. M. 2022, gbdes: DECam instrumental signature fitting and processing programs,, Astrophysics Source Code Library, record ascl:2210.011
- Bernstein, G. M., & Jarvis, M. 2002, AJ, 123, 583, doi: [10.1086/338085](https://doi.org/10.1086/338085)
- Bernstein, G. M., Armstrong, R., Plazas, A. A., et al. 2017, PASP, 129, 074503, doi: [10.1088/1538-3873/aa6c55](https://doi.org/10.1088/1538-3873/aa6c55)
- Bertin, E. 2011, in Astronomical Society of the Pacific Conference Series, Vol. 442, Astronomical Data Analysis Software and Systems XX, ed. I. N. Evans, A. Accomazzi, D. J. Mink, & A. H. Rots, 435
- Blum, R., & the Rubin Operations Team. 2020, Vera C. Rubin Observatory Data Policy, Data Management Operations Controlled Document RDO-013, Vera C. Rubin Observatory. <https://ls.st/RDO-013>
- Boch, T., & Fernique, P. 2014, in Astronomical Society of the Pacific Conference Series, Vol. 485, Astronomical Data Analysis Software and Systems XXIII, ed. N. Manset & P. Forshay, 277
- Bonnarel, F., Dowler, P., Demleitner, M., Tody, D., & Dempsey, J. 2017, IVOA Server-side Operations for Data Access Version 1.0., IVOA Recommendation 17 May 2017 doi: [10.5479/ADS/bib/2017ivoa.spec.0517B](https://doi.org/10.5479/ADS/bib/2017ivoa.spec.0517B)
- Bonnarel, F., Fernique, P., Bienaymé, O., et al. 2000, A&AS, 143, 33, doi: [10.1051/aas:2000331](https://doi.org/10.1051/aas:2000331)
- Bosch, J., Armstrong, R., Bickerton, S., et al. 2018, PASJ, 70, S5, doi: [10.1093/pasj/psx080](https://doi.org/10.1093/pasj/psx080)
- Broughton, A., Utsumi, Y., Plazas Malagón, A. A., et al. 2024, PASP, 136, 045003, doi: [10.1088/1538-3873/ad3aa2](https://doi.org/10.1088/1538-3873/ad3aa2)
- Burke, D. L., Rykoff, E. S., Allam, S., et al. 2018, AJ, 155, 41, doi: [10.3847/1538-3881/aa9f22](https://doi.org/10.3847/1538-3881/aa9f22)
- Chambers, K. C., Magnier, E. A., Metcalfe, N., et al. 2016, arXiv e-prints, arXiv:1612.05560, doi: [10.48550/arXiv.1612.05560](https://doi.org/10.48550/arXiv.1612.05560)
- de Vaucouleurs, G. 1948, Annales d'Astrophysique, 11, 247
- de Vaucouleurs, G. 1953, MNRAS, 113, 134, doi: [10.1093/mnras/113.2.134](https://doi.org/10.1093/mnras/113.2.134)
- Dowler, P., Bonnarel, F., & Tody, D. 2015, IVOA Simple Image Access Version 2.0., IVOA Recommendation 23 December 2015 doi: [10.5479/ADS/bib/2015ivoa.spec.1223D](https://doi.org/10.5479/ADS/bib/2015ivoa.spec.1223D)
- Dowler, P., Rixon, G., Tody, D., & Demleitner, M. 2019, Table Access Protocol Version 1.1., IVOA Recommendation 27 September 2019
- Economou, F. 2023, The Rubin Science Platform, Data Management Technical Note DMTN-212, NSF-DOE Vera C. Rubin Observatory. <https://dmtn-212.lsst.io/>
- Eggl, S., Juric, M., Moeyens, J., & Jones, L. 2020, in AAS/Division for Planetary Sciences Meeting Abstracts, Vol. 52, AAS/Division for Planetary Sciences Meeting Abstracts, 211.01
- Esteves, J. H., Utsumi, Y., Snyder, A., et al. 2023, PASP, 135, 115003, doi: [10.1088/1538-3873/ad0a73](https://doi.org/10.1088/1538-3873/ad0a73)
- Euclid Collaboration, Romelli, E., Kümmel, M., et al. 2025, arXiv e-prints, arXiv:2503.15305, doi: [10.48550/arXiv.2503.15305](https://doi.org/10.48550/arXiv.2503.15305)
- Fagrelus, P., & Rykoff, E. 2025, Rubin Baseline Calibration Plan, Commissioning Technical Note SITCOMTN-086, NSF-DOE Vera C. Rubin Observatory. <https://sitcomtn-086.lsst.io/>

- Ferguson, P., Rykoff, E., Carlin, J., Saunders, C., & Parejko, J. 2025, The Monster: A reference catalog with synthetic ugrizy-band fluxes for the Vera C. Rubin observatory, Data Management Technical Note DMTN-277, NSF-DOE Vera C. Rubin Observatory. <https://dmtn-277.lsst.io/>
- Fernique, P., Allen, M. G., Boch, T., et al. 2015, *A&A*, 578, A114, doi: [10.1051/0004-6361/201526075](https://doi.org/10.1051/0004-6361/201526075)
- Fernique, P., Allen, M., Boch, T., et al. 2017, HiPS - Hierarchical Progressive Survey Version 1.0,, IVOA Recommendation 19 May 2017 doi: [10.5479/ADS/bib/2017ivoa.spec.0519F](https://doi.org/10.5479/ADS/bib/2017ivoa.spec.0519F)
- Fortino, W. F., Bernstein, G. M., Bernardinelli, P. H., et al. 2021, *AJ*, 162, 106, doi: [10.3847/1538-3881/ac0722](https://doi.org/10.3847/1538-3881/ac0722)
- Gaia Collaboration, Montegriffo, P., Bellazzini, M., et al. 2023, *A&A*, 674, A33, doi: [10.1051/0004-6361/202243709](https://doi.org/10.1051/0004-6361/202243709)
- Górski, K. M., Hivon, E., Banday, A. J., et al. 2005, *ApJ*, 622, 759, doi: [10.1086/427976](https://doi.org/10.1086/427976)
- Graham, M., Plante, R., Tody, D., & Fitzpatrick, M. 2014, PyVO: Python access to the Virtual Observatory,, Astrophysics Source Code Library, record ascl:1402.004
- Graham, M. L., Carlin, J. L., Adair, C. L., et al. 2025, Guidelines for User Tutorials, Technical Note RTN-045, NSF-DOE Vera C. Rubin Observatory. <https://rtn-045.lsst.io/>
- Gray, B. 2025, find_orb: Orbit determination from observations,
- Guy, L. P., Bechtol, K., Bellm, E., et al. 2025, Rubin Observatory Plans for an Early Science Program, Technical Note RTN-011, NSF-DOE Vera C. Rubin Observatory, doi: [10.5281/zenodo.5683848](https://doi.org/10.5281/zenodo.5683848)
- Heinze, A., Eggl, S., Juric, M., et al. 2022, in AAS/Division for Planetary Sciences Meeting Abstracts, Vol. 54, AAS/Division for Planetary Sciences Meeting Abstracts, 504.04
- Heinze, A., Juric, M., & Kurlander, J. 2023, heliolineX: Open Source Solar System Discovery Software,
- Hirata, C., & Seljak, U. 2003, *MNRAS*, 343, 459, doi: [10.1046/j.1365-8711.2003.06683.x](https://doi.org/10.1046/j.1365-8711.2003.06683.x)
- Holman, M. J., Payne, M. J., Blankley, P., Janssen, R., & Kuindersma, S. 2018, *AJ*, 156, 135, doi: [10.3847/1538-3881/aad69a](https://doi.org/10.3847/1538-3881/aad69a)
- Howard, J., Reil, K., Claver, C., et al. 2018, in Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series, Vol. 10700, Ground-based and Airborne Telescopes VII, ed. H. K. Marshall & J. Spyromilio, 107003D, doi: [10.1117/12.2312684](https://doi.org/10.1117/12.2312684)
- Illingworth, G., Magee, D., Bouwens, R., et al. 2016, arXiv e-prints, arXiv:1606.00841, doi: [10.48550/arXiv.1606.00841](https://doi.org/10.48550/arXiv.1606.00841)
- Ingraham, P., Fagrelus, P., Stubbs, C. W., et al. 2022, in Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series, Vol. 12182, Ground-based and Airborne Telescopes IX, ed. H. K. Marshall, J. Spyromilio, & T. Usuda, 121820R, doi: [10.1117/12.2630185](https://doi.org/10.1117/12.2630185)
- Ivezic, Z. 2022, Survey Cadence Optimization Committee's Phase 1 Recommendation, Project Science Technical Note PSTN-053, NSF-DOE Vera C. Rubin Observatory. <https://pstn-053.lsst.io/>
- Ivezić, Ž., & The LSST Science Collaboration. 2018, LSST Science Requirements Document, Project Controlled Document LPM-17, Vera C. Rubin Observatory. <https://ls.st/LPM-17>
- Ivezić, Ž., Kahn, S. M., Tyson, J. A., et al. 2019a, *ApJ*, 873, 111, doi: [10.3847/1538-4357/ab042c](https://doi.org/10.3847/1538-4357/ab042c)
- Ivezić, Ž., Kahn, S. M., Tyson, J. A., et al. 2019b, *ApJ*, 873, 111, doi: [10.3847/1538-4357/ab042c](https://doi.org/10.3847/1538-4357/ab042c)
- Jarvis, M., et al. 2021, *Mon. Not. Roy. Astron. Soc.*, 501, 1282, doi: [10.1093/mnras/staa3679](https://doi.org/10.1093/mnras/staa3679)
- Jenness, T., & Dubois-Felsmann, G. P. 2025, IVOA Identifier Usage at the Rubin Observatory, Data Management Technical Note DMTN-302, Vera C. Rubin Observatory. <https://dmtn-302.lsst.io/>
- Jenness, T., Voutsinas, S., Dubois-Felsmann, G. P., & Salnikov, A. 2024, arXiv e-prints, arXiv:2501.00544, doi: [10.48550/arXiv.2501.00544](https://doi.org/10.48550/arXiv.2501.00544)
- Jenness, T., Bosch, J. F., Salnikov, A., et al. 2022, in Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series, Vol. 12189, Software and Cyberinfrastructure for Astronomy VII, 1218911, doi: [10.1117/12.2629569](https://doi.org/10.1117/12.2629569)
- Jones, R. L. 2021, Survey Strategy and Cadence Choices for the Vera C. Rubin Observatory Legacy Survey of Space and Time (LSST), Project Science Technical Note PSTN-051, NSF-DOE Vera C. Rubin Observatory. <https://pstn-051.lsst.io/>
- Juric, M. 2025, mpsky: Multi-purpose sky catalog cross-matching,
- Jurić, M., Ciardi, D., Dubois-Felsmann, G., & Guy, L. 2019, LSST Science Platform Vision Document, Systems Engineering Controlled Document LSE-319, NSF-DOE Vera C. Rubin Observatory. <https://lse-319.lsst.io/>
- Jurić, M., Axelrod, T., Becker, A., et al. 2023, Data Products Definition Document, Systems Engineering Controlled Document LSE-163, NSF-DOE Vera C. Rubin Observatory. <https://lse-163.lsst.io/>

- Kannawadi, A. 2022, Consistent galaxy colors with Gaussian-Aperture and PSF photometry, Data Management Technical Note DMTN-190, NSF-DOE Vera C. Rubin Observatory. <https://dmtn-190.lsst.io/>
- Kron, R. G. 1980, ApJS, 43, 305, doi: [10.1086/190669](https://doi.org/10.1086/190669)
- Kuijken, K. 2008, A&A, 482, 1053, doi: [10.1051/0004-6361:20066601](https://doi.org/10.1051/0004-6361:20066601)
- Lange, T., Nordby, M., Pollek, H., et al. 2024, in Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series, Vol. 13096, Ground-based and Airborne Instrumentation for Astronomy X, ed. J. J. Bryant, K. Motohara, & J. R. D. Vernet, 130961O, doi: [10.1117/12.3019302](https://doi.org/10.1117/12.3019302)
- Léget, P. F., Astier, P., Regnault, N., et al. 2021, A&A, 650, A81, doi: [10.1051/0004-6361/202140463](https://doi.org/10.1051/0004-6361/202140463)
- Lim, K.-T. 2022, Proposal and Prototype for Prompt Processing, Data Management Technical Note DMTN-219, NSF-DOE Vera C. Rubin Observatory. <https://dmtn-219.lsst.io/>
- Lim, K.-T. 2025, The Consolidated Database of Image Metadata, Data Management Technical Note DMTN-227, NSF-DOE Vera C. Rubin Observatory. <https://dmtn-227.lsst.io/>
- Louys, M., Tody, D., Dowler, P., et al. 2017, Observation Data Model Core Components, its Implementation in the Table Access Protocol Version 1.1., IVOA Recommendation 09 May 2017 doi: [10.5479/ADS/bib/2017ivoa.spec.0509L](https://doi.org/10.5479/ADS/bib/2017ivoa.spec.0509L)
- LSST Dark Energy Science Collaboration (LSST DESC), Abolfathi, B., Alonso, D., et al. 2021, ApJS, 253, 31, doi: [10.3847/1538-4365/abd62c](https://doi.org/10.3847/1538-4365/abd62c)
- Lust, N. B., Jenness, T., Bosch, J. F., et al. 2023, arXiv e-prints, arXiv:2303.03313, doi: [10.48550/arXiv.2303.03313](https://doi.org/10.48550/arXiv.2303.03313)
- Mandelbaum, R., Hirata, C. M., Seljak, U., et al. 2005, MNRAS, 361, 1287, doi: [10.1111/j.1365-2966.2005.09282.x](https://doi.org/10.1111/j.1365-2966.2005.09282.x)
- Megias Homar, G., Kahn, S. M., Meyers, J. M., Crenshaw, J. F., & Thomas, S. J. 2024, The Astrophysical Journal, 974, 108, doi: [10.3847/1538-4357/ad6cdc](https://doi.org/10.3847/1538-4357/ad6cdc)
- Megias Homar, G., Tighe, R., Thomas, S., et al. 2024, in Ground-based and Airborne Telescopes X, ed. H. K. Marshall, J. Spyromilio, & T. Usuda, Vol. 13094, International Society for Optics and Photonics (SPIE), 130943C, doi: [10.1117/12.3019031](https://doi.org/10.1117/12.3019031)
- Melchior, P., Moolekamp, F., Jerdee, M., et al. 2018, Astronomy and Computing, 24, 129, doi: [10.1016/j.ascom.2018.07.001](https://doi.org/10.1016/j.ascom.2018.07.001)
- Mueller, F., et al. 2023, in ASP Conf. Ser., Vol. TBD, ADASS XXXII, ed. S. Gaudet, S. Gwyn, P. Dowler, D. Bohlender, & A. Hincks (San Francisco: ASP), in press. <https://dmtn-243.lsst.io>
- Naghib, E., Yoachim, P., Vanderbei, R. J., Connolly, A. J., & Jones, R. L. 2019, The Astronomical Journal, 157, 151, doi: [10.3847/1538-3881/aafece](https://doi.org/10.3847/1538-3881/aafece)
- NSF-DOE Vera C. Rubin Observatory. 2025, Legacy Survey of Space and Time Data Preview 1 [Data set], NSF-DOE Vera C. Rubin Observatory, doi: [10.71929/RUBIN/2570308](https://doi.org/10.71929/RUBIN/2570308)
- NSF-DOE Vera C. Rubin Observatory. 2025a, Legacy Survey of Space and Time Data Preview 1: raw dataset type [Data set], NSF-DOE Vera C. Rubin Observatory, doi: [10.71929/RUBIN/2570310](https://doi.org/10.71929/RUBIN/2570310)
- NSF-DOE Vera C. Rubin Observatory. 2025b, Legacy Survey of Space and Time Data Preview 1: visit_image dataset type [Data set], NSF-DOE Vera C. Rubin Observatory, doi: [10.71929/RUBIN/2570311](https://doi.org/10.71929/RUBIN/2570311)
- NSF-DOE Vera C. Rubin Observatory. 2025c, Legacy Survey of Space and Time Data Preview 1: deep_coadd dataset type [Data set], NSF-DOE Vera C. Rubin Observatory, doi: [10.71929/RUBIN/2570313](https://doi.org/10.71929/RUBIN/2570313)
- NSF-DOE Vera C. Rubin Observatory. 2025d, Legacy Survey of Space and Time Data Preview 1: template_coadd dataset type [Data set], NSF-DOE Vera C. Rubin Observatory, doi: [10.71929/RUBIN/2570314](https://doi.org/10.71929/RUBIN/2570314)
- NSF-DOE Vera C. Rubin Observatory. 2025e, Legacy Survey of Space and Time Data Preview 1: difference_image dataset type [Data set], NSF-DOE Vera C. Rubin Observatory, doi: [10.71929/RUBIN/2570312](https://doi.org/10.71929/RUBIN/2570312)
- NSF-DOE Vera C. Rubin Observatory. 2025f, Legacy Survey of Space and Time Data Preview 1: Source searchable catalog [Data set], NSF-DOE Vera C. Rubin Observatory, doi: [10.71929/RUBIN/2570323](https://doi.org/10.71929/RUBIN/2570323)
- NSF-DOE Vera C. Rubin Observatory. 2025g, Legacy Survey of Space and Time Data Preview 1: Object searchable catalog [Data set], NSF-DOE Vera C. Rubin Observatory, doi: [10.71929/RUBIN/2570325](https://doi.org/10.71929/RUBIN/2570325)
- NSF-DOE Vera C. Rubin Observatory. 2025h, Legacy Survey of Space and Time Data Preview 1: ForcedSource searchable catalog [Data set], NSF-DOE Vera C. Rubin Observatory, doi: [10.71929/RUBIN/2570327](https://doi.org/10.71929/RUBIN/2570327)
- NSF-DOE Vera C. Rubin Observatory. 2025i, Legacy Survey of Space and Time Data Preview 1: DiaSource searchable catalog [Data set], NSF-DOE Vera C. Rubin Observatory, doi: [10.71929/RUBIN/2570317](https://doi.org/10.71929/RUBIN/2570317)

- NSF-DOE Vera C. Rubin Observatory. 2025j, Legacy Survey of Space and Time Data Preview 1: DiaObject searchable catalog [Data set], NSF-DOE Vera C. Rubin Observatory, doi: [10.71929/RUBIN/2570319](https://doi.org/10.71929/RUBIN/2570319)
- NSF-DOE Vera C. Rubin Observatory. 2025k, Legacy Survey of Space and Time Data Preview 1: ForcedSourceOnDiaObject searchable catalog [Data set], NSF-DOE Vera C. Rubin Observatory, doi: [10.71929/RUBIN/2570321](https://doi.org/10.71929/RUBIN/2570321)
- NSF-DOE Vera C. Rubin Observatory. 2025l, Legacy Survey of Space and Time Data Preview 1: CcdVisit searchable catalog [Data set], NSF-DOE Vera C. Rubin Observatory, doi: [10.71929/RUBIN/2570331](https://doi.org/10.71929/RUBIN/2570331)
- NSF-DOE Vera C. Rubin Observatory. 2025a, Legacy Survey of Space and Time Data Preview 1: SSObject searchable catalog [Data set], NSF-DOE Vera C. Rubin Observatory, doi: [10.71929/RUBIN/2570335](https://doi.org/10.71929/RUBIN/2570335)
- NSF-DOE Vera C. Rubin Observatory. 2025b, Legacy Survey of Space and Time Data Preview 1: SSSource searchable catalog [Data set], NSF-DOE Vera C. Rubin Observatory, doi: [10.71929/RUBIN/2570333](https://doi.org/10.71929/RUBIN/2570333)
- NSF-DOE Vera C. Rubin Observatory. 2025, Legacy Survey of Space and Time Data Preview 1: survey property dataset type [Data set], NSF-DOE Vera C. Rubin Observatory, doi: [10.71929/RUBIN/2570315](https://doi.org/10.71929/RUBIN/2570315)
- Oke, J. B., & Gunn, J. E. 1983, ApJ, 266, 713, doi: [10.1086/160817](https://doi.org/10.1086/160817)
- O'Mullane, W., Economou, F., Huang, F., et al. 2024a, in Astronomical Society of the Pacific Conference Series, Vol. 535, Astromical Data Analysis Software and Systems XXXI, ed. B. V. Hugo, R. Van Rooyen, & O. M. Smirnov, 227, doi: [10.48550/arXiv.2111.15030](https://doi.org/10.48550/arXiv.2111.15030)
- O'Mullane, W., AlSayyad, Y., Chiang, J., et al. 2024b, in Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series, Vol. 13101, Software and Cyberinfrastructure for Astronomy VIII, ed. J. Ibsen & G. Chiozzi, 131012B, doi: [10.1117/12.3018005](https://doi.org/10.1117/12.3018005)
- Onken, C. A., Wolf, C., Bessell, M. S., et al. 2019, PASA, 36, e033, doi: [10.1017/pasa.2019.27](https://doi.org/10.1017/pasa.2019.27)
- Petrosian, V. 1976, ApJL, 210, L53, doi: [10.1086/18230110.1086/182253](https://doi.org/10.1086/18230110.1086/182253)
- Plazas, A. A., Shapiro, C., Smith, R., Huff, E., & Rhodes, J. 2018, Publications of the Astronomical Society of the Pacific, 130, 065004, doi: [10.1088/1538-3873/aab820](https://doi.org/10.1088/1538-3873/aab820)
- Plazas Malagón, A. A., Waters, C., Broughton, A., et al. 2025, Journal of Astronomical Telescopes, Instruments, and Systems, 11, 011209, doi: [10.1117/1.JATIS.11.1.011209](https://doi.org/10.1117/1.JATIS.11.1.011209)
- Plazas Malagón, A., Digel, S., Roodman, A., Broughton, A., & LSST Camera Team. 2025, LSSTCam and ComCam Focal Plane Layouts, Vera C. Rubin Observatory. <https://ctn-001.lsst.io/>
- Refregier, A. 2003, ARA&A, 41, 645, doi: [10.1146/annurev.astro.41.111302.102207](https://doi.org/10.1146/annurev.astro.41.111302.102207)
- Reiss, D. J., & Lupton, R. H. 2016, Implementation of Image Difference Decorrelation, Data Management Technical Note DMTN-021, NSF-DOE Vera C. Rubin Observatory. <https://dmtn-021.lsst.io/>
- Roodman, A., Rasmussen, A., Bradshaw, A., et al. 2024, in Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series, Vol. 13096, Ground-based and Airborne Instrumentation for Astronomy X, ed. J. J. Bryant, K. Motohara, & J. R. D. Vernet, 130961S, doi: [10.1117/12.3019698](https://doi.org/10.1117/12.3019698)
- Rubin, V. C., & Ford, Jr., W. K. 1970, ApJ, 159, 379, doi: [10.1086/150317](https://doi.org/10.1086/150317)
- Rubin, V. C., Ford, Jr., W. K., & Thonnard, N. 1980, ApJ, 238, 471, doi: [10.1086/158003](https://doi.org/10.1086/158003)
- Rubin Observatory Science Pipelines Developers. 2025, The LSST Science Pipelines Software: Optical Survey Pipeline Reduction and Analysis Environment, Project Science Technical Note PSTN-019, NSF-DOE Vera C. Rubin Observatory, doi: [10.71929/rubin/2570545](https://doi.org/10.71929/rubin/2570545)
- Rykoff, E. S., Tucker, D. L., Burke, D. L., et al. 2023, arXiv e-prints, arXiv:2305.01695, doi: [10.48550/arXiv.2305.01695](https://doi.org/10.48550/arXiv.2305.01695)
- Saunders, C. 2024, Astrometric Calibration in the LSST Pipeline, Data Management Technical Note DMTN-266, NSF-DOE Vera C. Rubin Observatory. <https://dmtn-266.lsst.io/>
- Schutt, T., Jarvis, M., Roodman, A., et al. 2025, The Open Journal of Astrophysics, 8, 26, doi: [10.33232/001c.132299](https://doi.org/10.33232/001c.132299)
- Sérsic, J. L. 1963, Boletín de la Asociación Argentina de Astronomía La Plata Argentina, 6, 41
- Sersic, J. L. 1968, Atlas de Galaxias Australes (Cordoba, Argentina: Observatorio Astronomico)
- Shanks, T., Metcalfe, N., Chehade, B., et al. 2015, MNRAS, 451, 4238, doi: [10.1093/mnras/stv1130](https://doi.org/10.1093/mnras/stv1130)
- SLAC National Accelerator Laboratory, & NSF-DOE Vera C. Rubin Observatory. 2024, LSST Commissioning Camera, SLAC National Accelerator Laboratory (SLAC), Menlo Park, CA (United States), doi: [10.71929/RUBIN/2561361](https://doi.org/10.71929/RUBIN/2561361)

- Stalder, B., Reil, K., Claver, C., et al. 2020, in Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series, Vol. 11447, Ground-based and Airborne Instrumentation for Astronomy VIII, ed. C. J. Evans, J. J. Bryant, & K. Motohara, 114470L, doi: [10.1117/12.2561132](https://doi.org/10.1117/12.2561132)
- Stalder, B., Reil, K., Aguilar, C., et al. 2022, in Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series, Vol. 12184, Ground-based and Airborne Instrumentation for Astronomy IX, ed. C. J. Evans, J. J. Bryant, & K. Motohara, 121840J, doi: [10.1117/12.2630184](https://doi.org/10.1117/12.2630184)
- Stalder, B., Munoz, F., Aguilar, C., et al. 2024, in Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series, Vol. 13094, Ground-based and Airborne Telescopes X, ed. H. K. Marshall, J. Spyromilio, & T. Usuda, 1309409, doi: [10.1117/12.3019266](https://doi.org/10.1117/12.3019266)
- Swinbank, J., Axelrod, T., Becker, A., et al. 2020, Data Management Science Pipelines Design, Data Management Controlled Document LDM-151, NSF-DOE Vera C. Rubin Observatory. <https://ldm-151.lsst.io/>
- Taranu, D. S. 2025, The MultiProFit astronomical source modelling code, Data Management Technical Note DMTN-312, NSF-DOE Vera C. Rubin Observatory. <https://dmtn-312.lsst.io/>
- Taylor, M. 2011, TOPCAT: Tool for OPERations on Catalogues And Tables,, Astrophysics Source Code Library, record ascl:1101.010
- The Rubin Observatory Survey Cadence Optimization Committee. 2023, Survey Cadence Optimization Committee’s Phase 2 Recommendations, Project Science Technical Note PSTN-055, NSF-DOE Vera C. Rubin Observatory. <https://pstn-055.lsst.io/>
- The Rubin Observatory Survey Cadence Optimization Committee. 2025, Survey Cadence Optimization Committee’s Phase 3 Recommendations, Project Science Technical Note PSTN-056, NSF-DOE Vera C. Rubin Observatory. <https://pstn-056.lsst.io/>
- Thomas, S., Connolly, A., Crenshaw, J. F., et al. 2023, in Adaptive Optics for Extremely Large Telescopes (AO4ELT7), 67, doi: [10.13009/AO4ELT7-2023-069](https://doi.org/10.13009/AO4ELT7-2023-069)
- Wang, D. L., Monkewitz, S. M., Lim, K.-T., & Becla, J. 2011, in State of the Practice Reports, SC ’11 (New York, NY, USA: ACM), 12:1–12:11, doi: [10.1145/2063348.2063364](https://doi.org/10.1145/2063348.2063364)
- Waters, C. Z., Magnier, E. A., Price, P. A., et al. 2020, ApJS, 251, 4, doi: [10.3847/1538-4365/abb82b](https://doi.org/10.3847/1538-4365/abb82b)
- Whitaker, K. E., Ashas, M., Illingworth, G., et al. 2019, ApJS, 244, 16, doi: [10.3847/1538-4365/ab3853](https://doi.org/10.3847/1538-4365/ab3853)
- Wu, X., Roby, W., Goldian, T., et al. 2019, in Astronomical Society of the Pacific Conference Series, Vol. 521, Astronomical Data Analysis Software and Systems XXVI, ed. M. Molinaro, K. Shortridge, & F. Pasian, 32
- Xin, B., Claver, C., Liang, M., et al. 2015, ApOpt, 54, 9045, doi: [10.1364/AO.54.009045](https://doi.org/10.1364/AO.54.009045)
- Yoachim, P. 2022, Survey Strategy: Rolling Cadence, Project Science Technical Note PSTN-052, NSF-DOE Vera C. Rubin Observatory. <https://pstn-052.lsst.io/>
- Yoachim, P., Jones, L., Eric H. Neilsen, J., & Becker, M. R. 2024, lsst/rubin_scheduler: v3.0.0, v3.0.0 Zenodo, doi: [10.5281/zenodo.13985198](https://doi.org/10.5281/zenodo.13985198)
- Zhang, T., Almoubayyed, H., Mandelbaum, R., et al. 2023, MNRAS, 520, 2328, doi: [10.1093/mnras/stac3350](https://doi.org/10.1093/mnras/stac3350)